
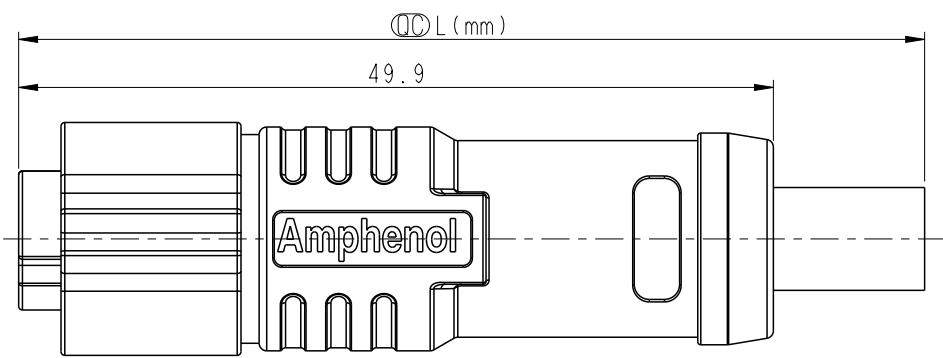


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

8P	TPU	6.8	26	ASY-A08BFFM-QL8JXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022-02-23	Sam Ho	Rev.01 to A, Initial Released




ASY-AXXBFFM-QL8JXX

XX: L=0~99Meters
 01: L=1Meters
 02: L=2Meters
 ...
 99: L=99Meters



XX: No. Of Pin

Shield Braid	編織	
8 Blue	藍	Twist
7 White/Blue	白/藍	
6 Brown	棕	Twist
5 White/Brown	白/棕	
4 Green	綠	Twist
3 White/Green	白/綠	
2 Orange	橘	Twist
1 White/Orange	白/橘	

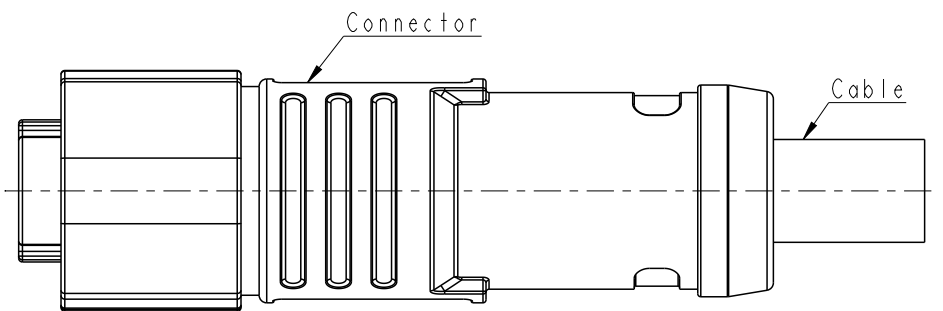

Note:

- * RoHS Compliant
- * \varnothing Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Shield: Metal
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: CAT 6A, 26#*4P+AL/MY+B, TPU Jacket, OD 6.8mm, GN.
- * Cable length tolerance:
 - 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

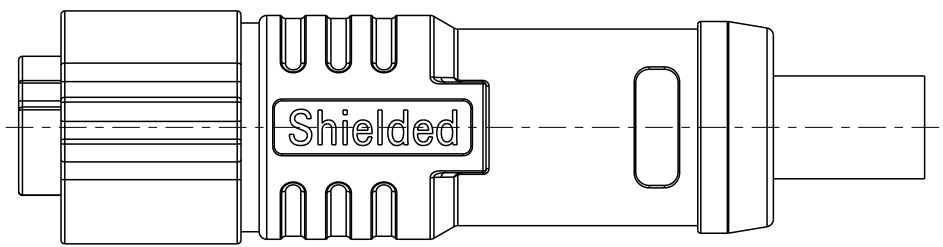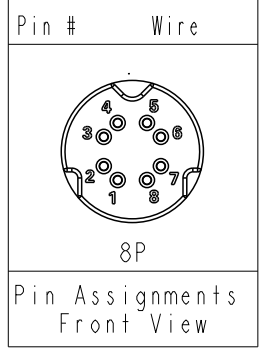

UNIT: mm	\varnothing	
TOLERANCE	±0.50mm	

TITLE XLOK, A SHLD-0.5A, A08P, CABLE W/O SR			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV.	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Sam Ho	DATE 2022-02-18
DWG NO. ASY-AXXBFFM-QL8W00	CHECKED BY Fred Lee	DATE 2022-02-18
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2022-02-18