

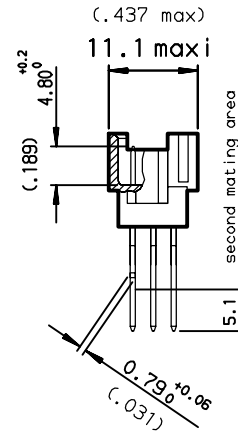


DIMENSIONS mm (inches)

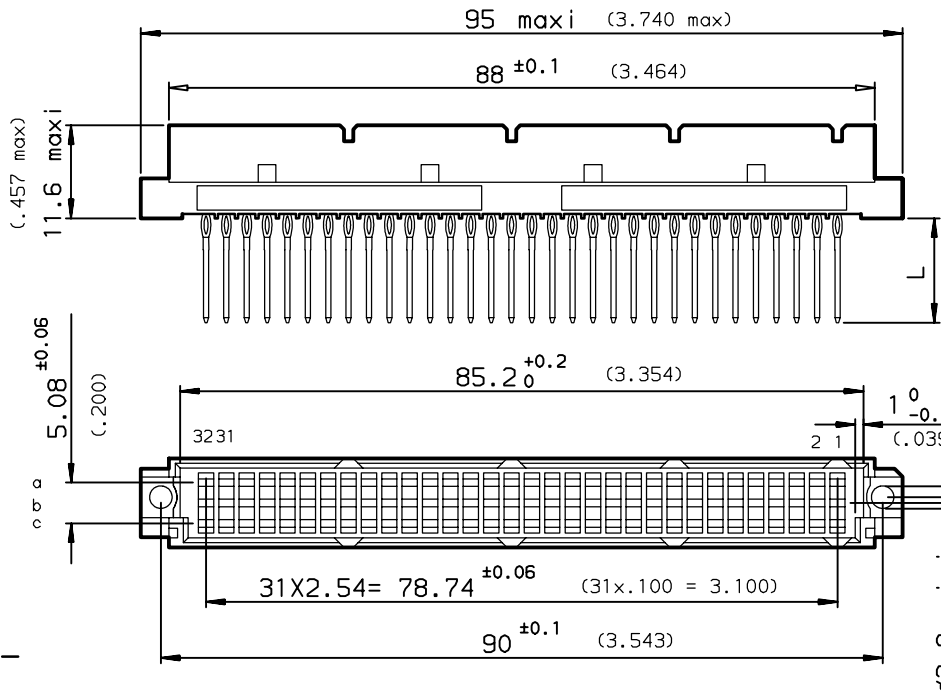

PCB DRILLING

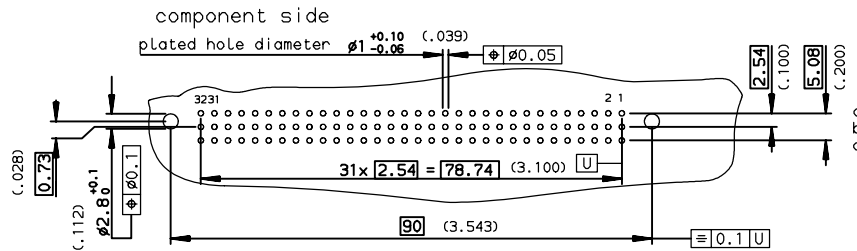

PART NUMBER	8609			79		7		5	
PIN OUT									
rows a-b-c				3				96	
rows a-c				4				64	
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (.521)								96	
L = 17.25 ±0.25 (.679)								97	
L = 20.00 ±0.25 (.787)								98	
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000
LEAD FREE									LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
 SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ROUILLARD	1997/10/31	0.X	±0.1	size
Eng	TARON	1997/10/31	ANGULAR	LINEAR	A3
Chr	LEGARE	1997/10/31	0.XX	±0.1	Scale
Appr	LEGARE	1997/10/31	0.XX' ±2'	0.XXX	±0.1
		Product family	DIN 8609	Spec ref	-
		STRAIGHT MALE - STYLE HE 11			Rev.
		PRESS FIT REAR PLUG UP			D
catalog no		-			dwg no
		-			C-8609-0663
		CUSTOMER			sheet 1 of 1

rev	ecn no	dr	date
B	-	ATC	1998/12/09
C	LS05-004	JTA	2005/02/26
D	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-