



M / scale 1:1

Bestückungsplan / contact layout

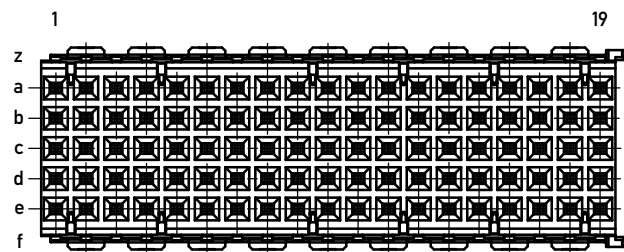

■ = bestückt / assemble

Lochbild für Leiterplatte board hole pattern (Bestückungsseite) (component mounting side)

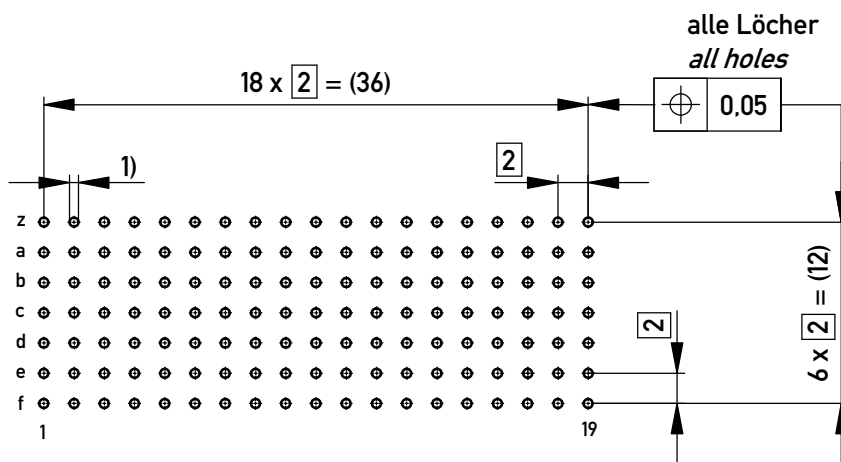

- 1) $\varnothing 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
- $\varnothing 0.6 \pm 0.05$ Diameter of finished plated-through hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 Nr.1
Metal plating of plating-through hole according to 164062 No.1

Fehlende Maße und Angaben nach IEC 61076-4-101
Missing information and dimensions per 61076-4-101

<p>Information: Abschirmblech Reihe z+f montiert / shielding row z+f mounted Anforderungsstufe 2 / class 2</p> <p>All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.</p> <p>Copyright by ERNI Production GmbH & Co. KG Proprietary notice pursuant to ISO 16016 to be observed.</p>	Tolerances	<p>All Dimensions in mm</p>	Scale	2:1
	<p>Subject to modification without prior notice. Drawing will not be updated.</p>		Designation	<p>ERmet-FS Federleiste B19 <i>ERmet-Female Straight Type B19</i></p>
<p>f</p>	<p>01.02.2018</p>	<p>www.ERNI.com</p>	<p>114112</p>	
<p>Index</p>	<p>Date</p>		<p>Class</p>	<p>ERMB19</p>