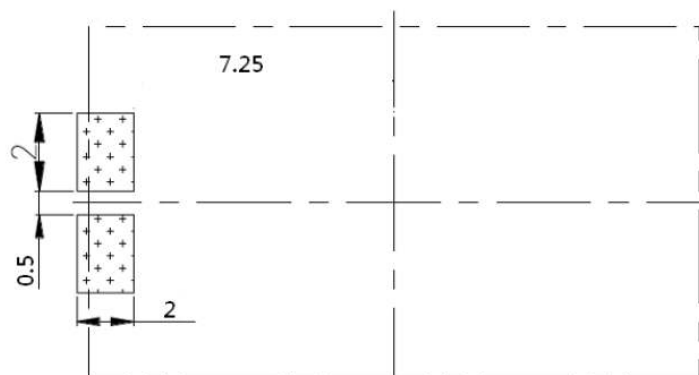
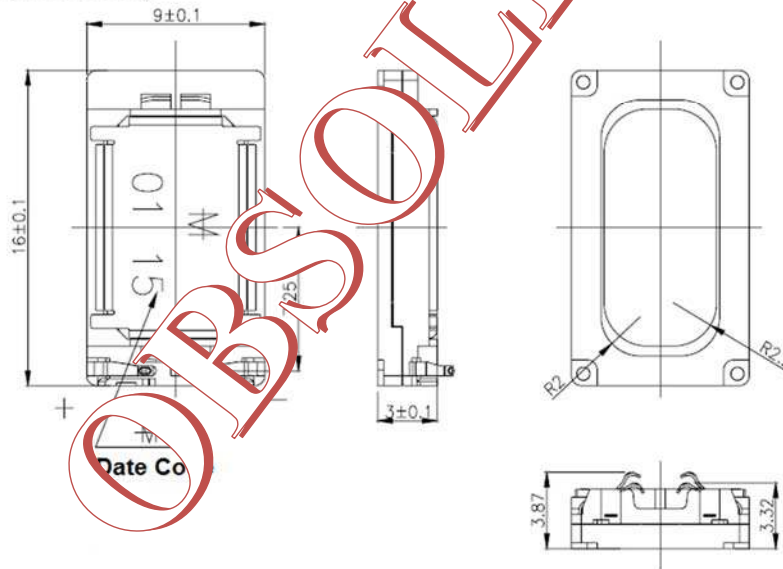


**Specifications:**

Impedance ( $\Omega$ )	$8 \pm 15\%$ at 2000 Hz at 1.0 V
Rated Power (W)	0.7
Max Power (W)	1.0
Resonance Freq Fo (Hz)	$550 \pm 20\%$ at 1.0V $860 \pm 15\%$ at 1.0V in 1cc closed box
Frequency Range (Hz)	Fo ~ 7000
Output S.P.L. (dB)	$88 \pm 3$ at 0.7w/0.1m 3.0kHz in 1cc closed box $70 \pm 3$ at 1w/1m 3.0kHz in 1cc closed box
Magnet	Neodymium
Frame Material	Stainless Steel
Operating / Storage Temp	$-40 \pm 100^\circ\text{C}$ / $-40$ to $85^\circ\text{C}$
Weight (g)	1.2
Options	For other options contact factory

**Dimensions:  $\pm 0.2$**  (units: mm)**ROHS Compliant****Recommended PCB Layout**