


MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP	LINE PLUG	LOAD CONNECTOR
1301530272	130153-0272	2.5 FT	MANUAL	14W47	25W47

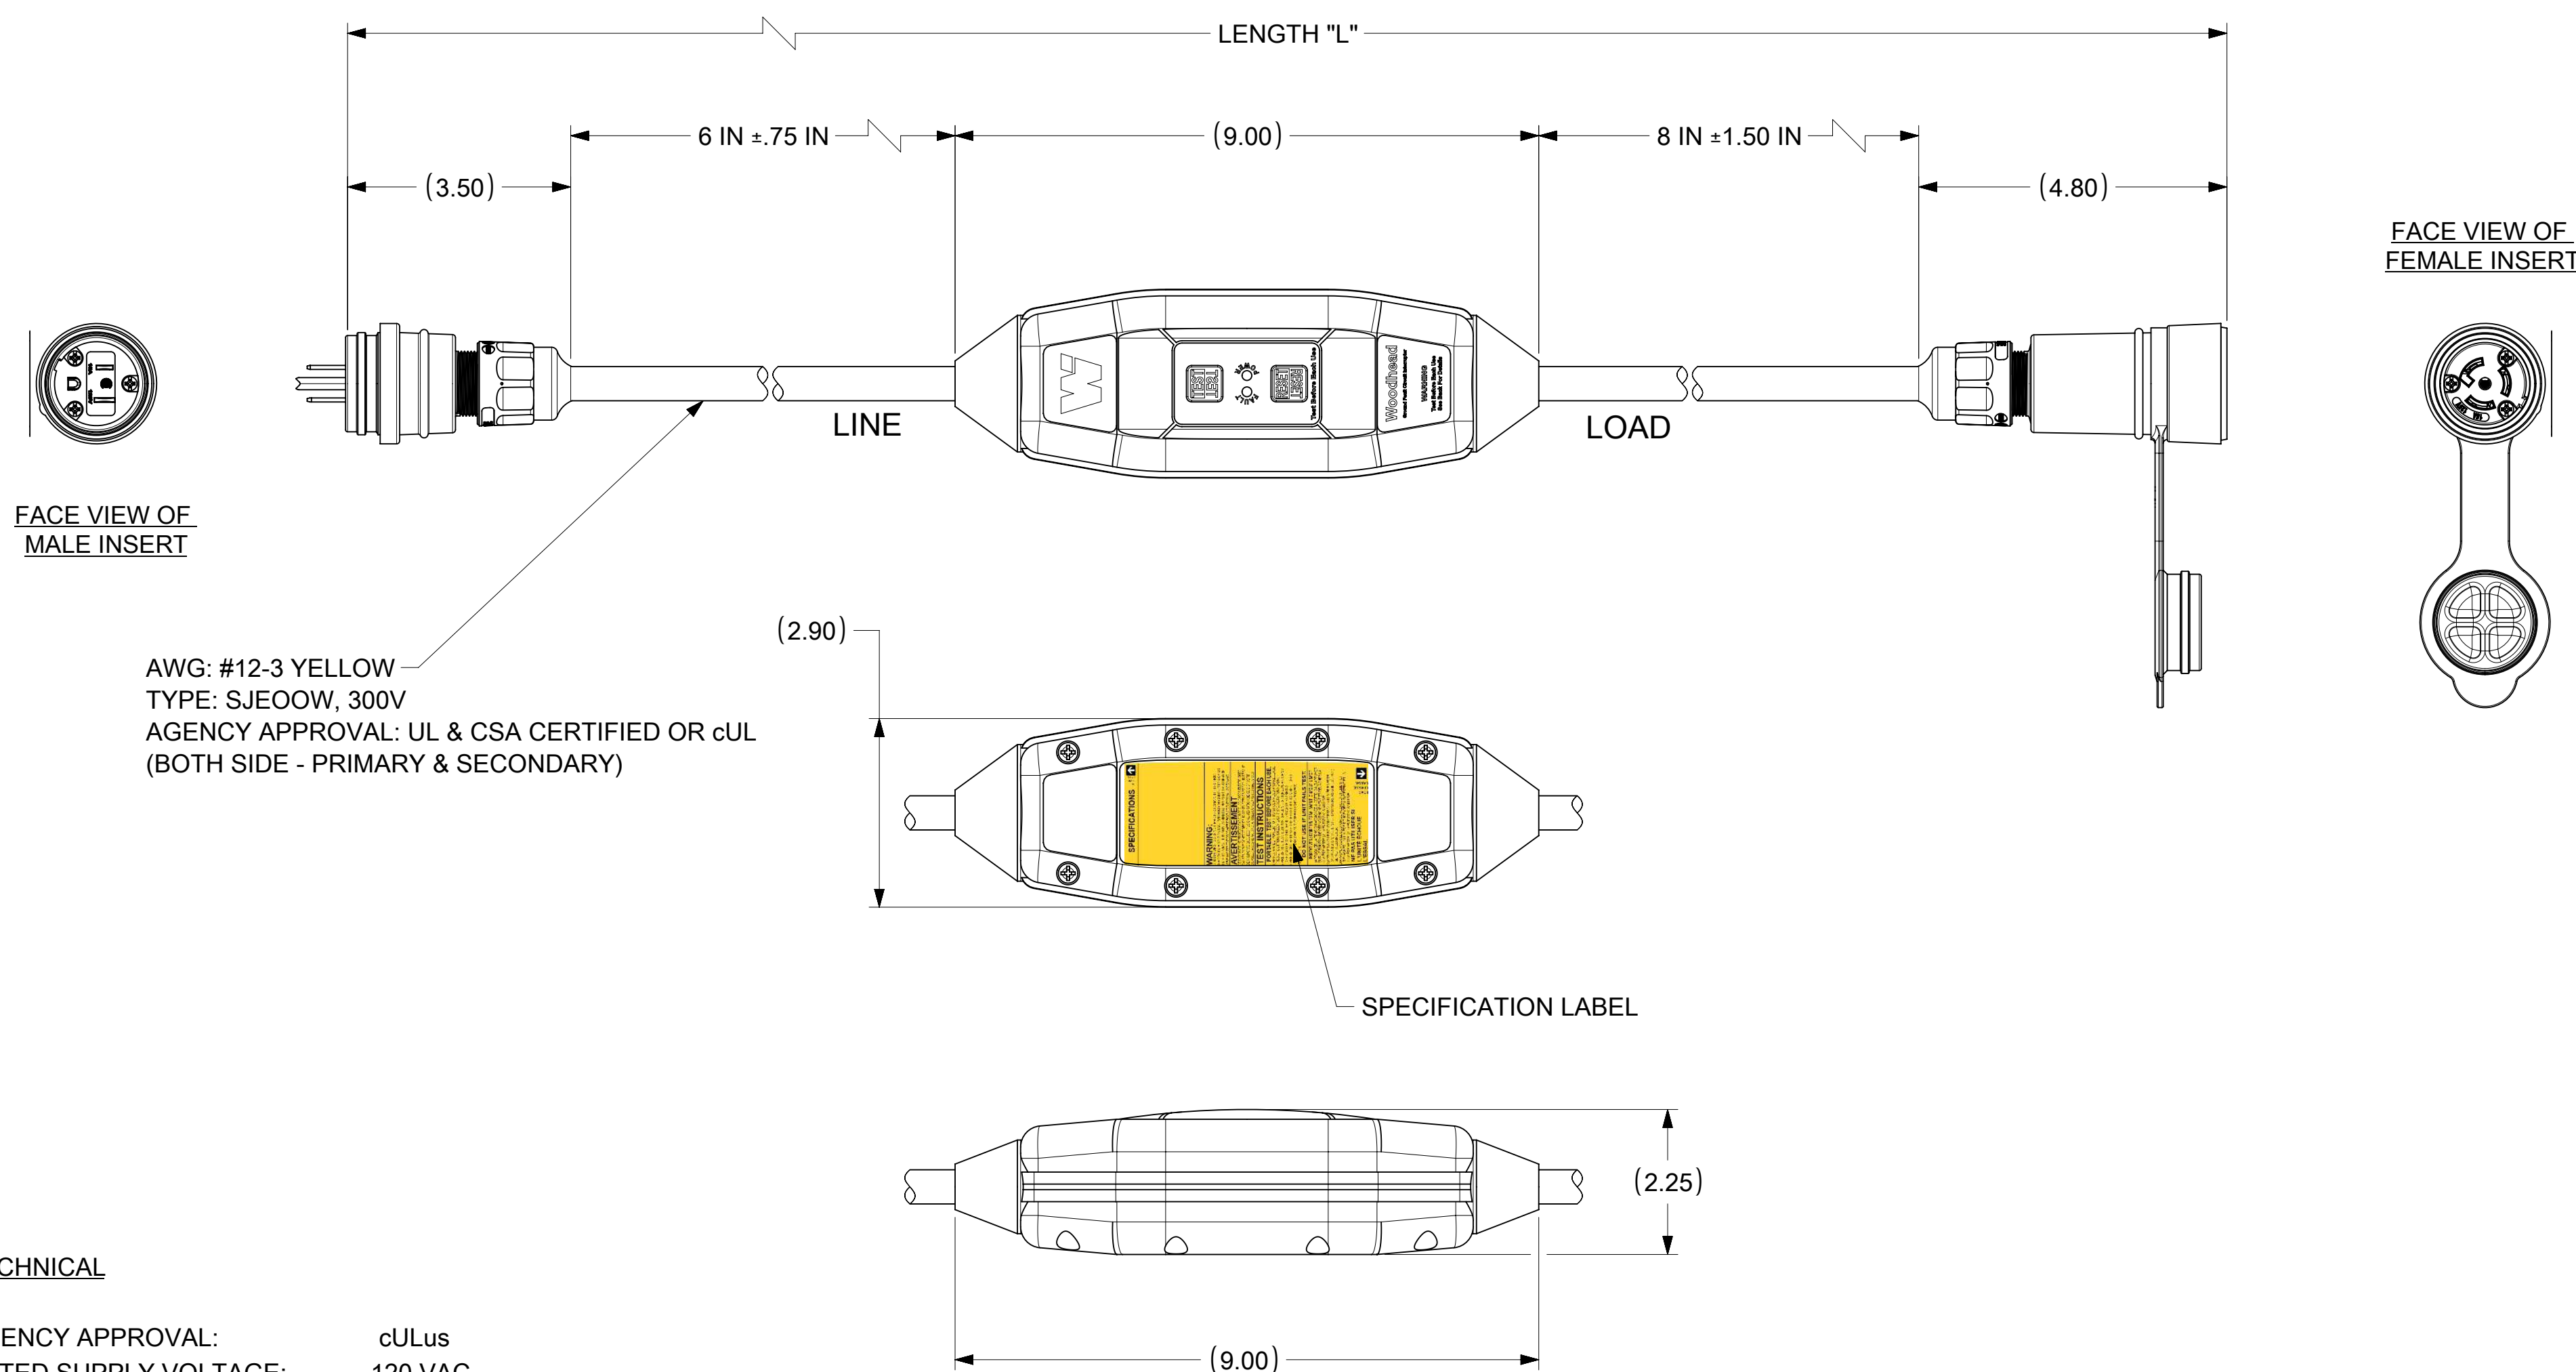

AWG: #12-3 YELLOW
 TYPE: SJEOOW, 300V
 AGENCY APPROVAL: UL & CSA CERTIFIED OR cUL
 (BOTH SIDE - PRIMARY & SECONDARY)

TECHNICAL

AGENCY APPROVAL:	cULus
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	120 AMPS, 50% INDUCTIVE
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	TYPE 4X, IP69, IP69K

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED WITH NEW GFCI SELF-TEST VERSION.	
	DIMENSION UNITS INCH	SCALE NTS		
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 669157	
	ANGULAR TOL ± °		DRWN: VASUTHKARP 2021/07/29	
4 PLACES ±		CHK'D: DNGUYEN62 2022/12/06		
3 PLACES ±		APPR: WLEUNG 2022/12/13		
2 PLACES ±		INITIAL REVISION:		
1 PLACE ±		DRWN: HKNEELAN 2016/10/03		
0 PLACES ±		APPR: JFMURPHY 2016/10/19		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER
		C-SIZE	130153	SD-130153-047
		CUSTOMER	SHEET NUMBER	DOC TYPE DOC PART REVISION
		GENERAL MARKET	1 OF 1	PSD 001 B