
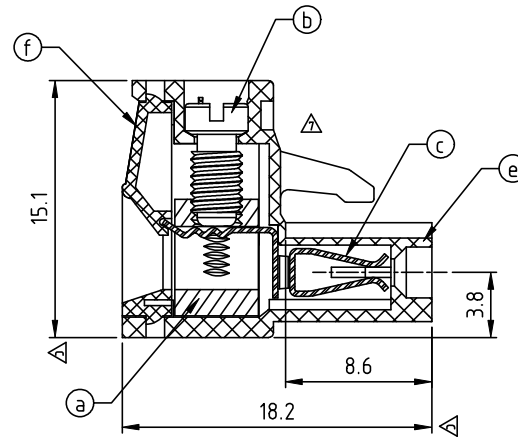


TJ xx 71x 2 xxxx G

No. OF POLES	COLOR	
02: 2 POLES	0 Black (RAL9005)	
03: 3 POLES	2 Red (RAL3001/D)	
:	3 Orange(RAL2011/P)	000 0 Standard @ Logo
24: 24 POLES	4 Yellow(RAL1018/A)	000 A Standard ANY Logo
	5 Green(RAL6018/T)	Any special item by customer request, please contact sales department.
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

△△ RoHS compliant (lead<4%) In copper Alloy

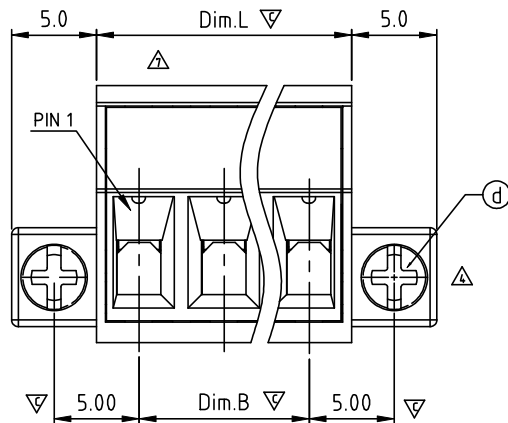

SIGN	DATE	DESCRIPTION	APPROVER
△	02/03'05	Part No. changed.	Marvin
△	06/26'06	Solid/Stranded wire(AWG) is changed from 12-22 to 12-24	Marvin
△	8/10'06	Added VDE and TUV standard	梁仁松
△	12/15'08	Flange screw changed from "-"solt type to "+/-"solt type	Kind
△	12/15'08	Operating Temp. changed from -30°C~+105°C to -40°C~+115°C	Kind
△	2010.03.08	Add the 2P mark	Jacke
△	12/08-14	Update the drawing	Evan


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz ,Tin plated
- △● Item d With flange screw: Steel Zinc plating M2.5"+/-" slot type
- Item e Terminal (housing): Thermoplastic (UL94V-0)
- Item f Terminal (cover): Thermoplastic (UL94V-0)

△ Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 20A/20A/20A
- Wire range: 2.5mm²/0.34-2.5mm²
- △● Solid wire(AWG): 12-24
- △● Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- △● Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension: ▽



Dim.L = N x 5.0
 Dim.B = (N-1) x 5.0
 N= number of poles

poles Dim.	2P-6P	7P-12P	13P-18P	19P-24P
Dim.L	±0.10	±0.20	±0.30	±0.40
Dim.B	±0.10	±0.20	±0.25	±0.30

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		TJ-5.00mm Series With flange					
PART NO.		TJxx71x2xxxxG		DWG NO.		8TJ0302	
APPROVED		CHECKED		DESIGNED		DRAWN	
		Evan 2014.12.08		Evan 2014.12.08		CUST NO.	
						Tolerance	
				UNIT: mm		X. ±0.50	
				SCALE: NONE		X.X ±0.30	
				SHEET: 01/01		X.XX ±0.10	
				REV.: H		X° ±1°	