


**ENERGIZER 387S**

**ZEROMERCURY**

**SILVER OXIDE**



**Industry Standard Dimensions**

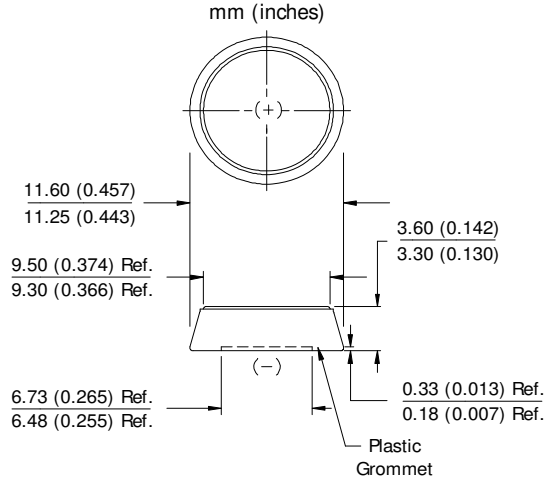


**Specifications**

Chemical System: Silver Oxide (Zn/Ag<sub>2</sub>O)  
 Designation: IEC-SR42  
 Nominal Voltage: 1.55 Volts  
 Typical Capacity: 63 mAh\* (to 1.2 volts)  
 Capacity Test: 15K ohm continuous drain at 21°C  
 Typical Weight: 1.1 grams (0.35 oz.)  
 Typical Volume: 0.25 cubic centimeters (0.02 cubic inch)  
 Impedance (40 Hz): 7 to 17 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.

**Cross Section**

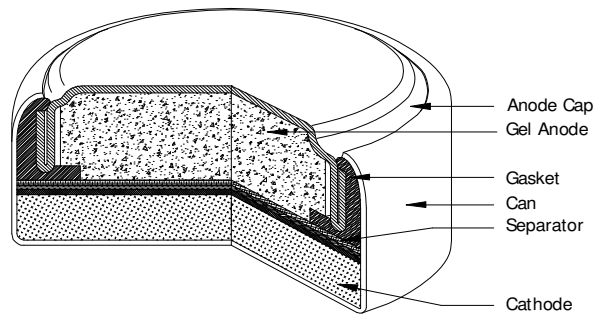


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN

**Typical Discharge Characteristics**

Typical Performance at 21°C (70°F)

Schedule: Continuous  
 Typical Drain @1.51V:  
 0.101 milliamperes  
 Load: 15K ohm

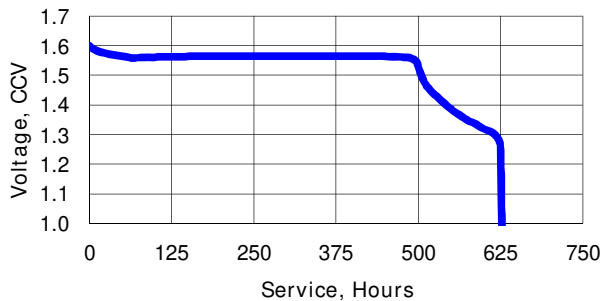


Schedule	Typical Drains at 1.51V (milliamperes)	Load (ohm)	Cutoff 1.2V (hours)
Continuous	0.101	15K	625


**Temperature Characteristics**

Typical Performance at Low Discharge Rates

**Service Effects**

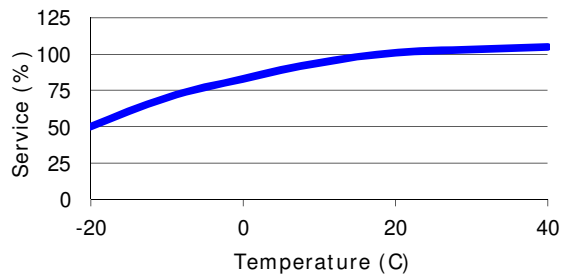

**Storage Effects**

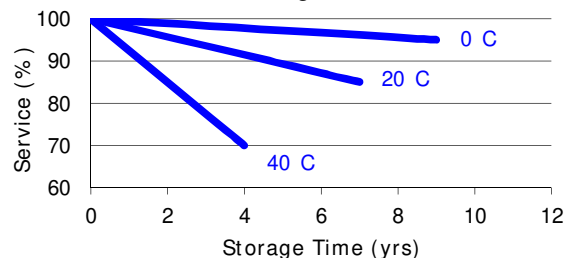

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
 © Energizer Holdings, Inc. - Contents herein do not constitute a warranty.