

Switchmode Power Rectifiers DPAK Surface Mount Package

... designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 Nanosecond Recovery Time
- Low Forward Voltage Drop
- Low Leakage


Mechanical Characteristics

- Case: Epoxy, Molded
- Finish: All External Surface Corrosion Resistance and Terminal Leads are Readily Solderable
- Lead Formed for Surface Mount
- Available in 16 mm Tape and Reel or Plastic Rails
- Compact Size
- Lead and Mounting Surface Temperature for Soldering Purpose 260°C Max. for 10 Seconds



MURD305
MURD310
MURD315
MURD320

**ULTRAFAST
 RECTIFIERS
 3 AMPERES
 50 TO 200 VOLTS**



MAXIMUM RATINGS

Rating	Symbol	MURD				Unit
		305	310	315	320	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	150	200	Volts
Average Rectified Forward Current ($T_C = 150^\circ\text{C}$, Rated V_R)	I_{FAV}	3				Amps
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20 kHz, $T_C = 150^\circ\text{C}$)	I_{FRM}	6				Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, 60 Hz)	I_{FSM}	75				Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	- 65 to +175				$^\circ\text{C}$

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	6 80	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage Drop (2) ($I_F = 3$ Amps, $T_J = 25^\circ\text{C}$) ($I_F = 3$ Amps, $T_J = 125^\circ\text{C}$)	V_F	0.95 0.75	Volts
Maximum Instantaneous Reverse Current (2) ($T_J = 25^\circ\text{C}$, Rated dc Voltage) ($T_J = 125^\circ\text{C}$, Rated dc Voltage)	I_R	5 500	μA
Maximum Reverse Recovery Time ($I_F = 1$ Amp, $dI/dt = 50$ Amps/ μs , $V_R = 30$ V, $T_J = 25^\circ\text{C}$) ($I_F = 0.5$ Amp, $I_R = 1$ Amp, $I_{REC} = 0.25$ A, $V_R = 30$ V, $T_J = 25^\circ\text{C}$)	t_{rr}	35 25	ns

(1) Rating applies when surface mounted on the minimum pad sizes recommended.
 (2) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2\%$.

MURD305, MURD310, MURD315, MURD320

TYPICAL CHARACTERISTICS


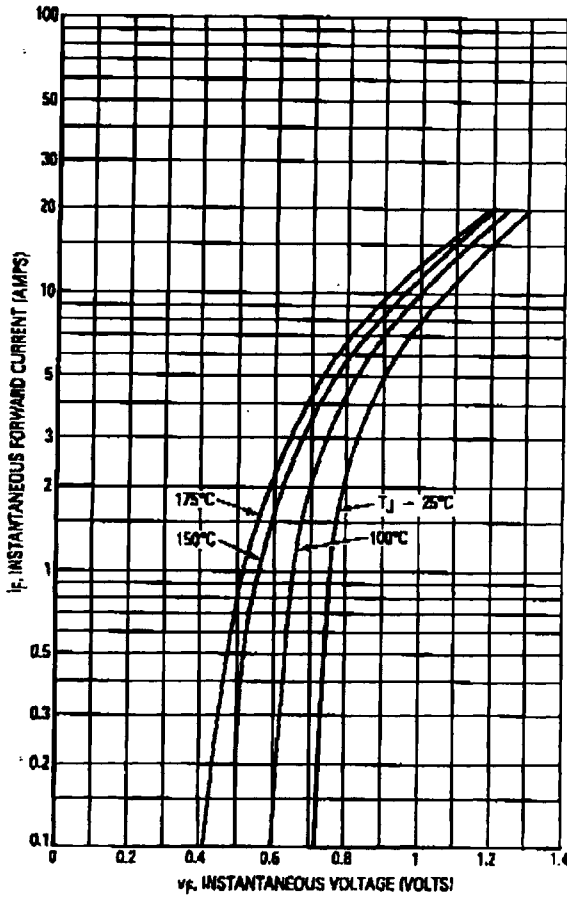


Figure 1. Typical Forward Voltage

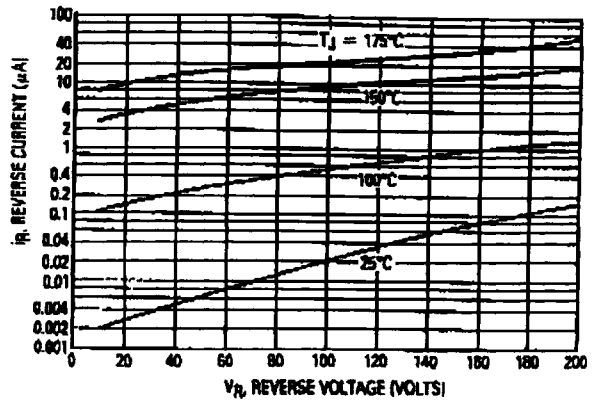

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if V_R is sufficient below rated V_R .

Figure 2. Typical Reverse Current*

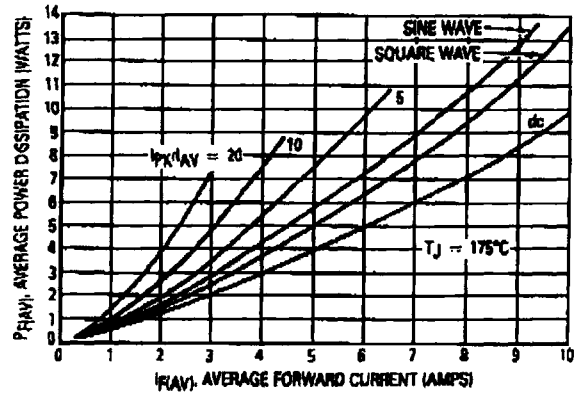


Figure 3. Average Power Dissipation

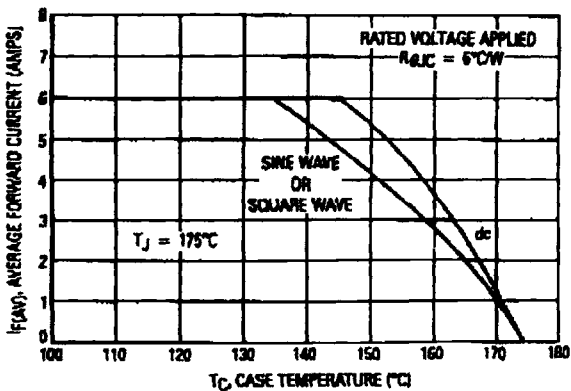


Figure 4. Current Derating, Case

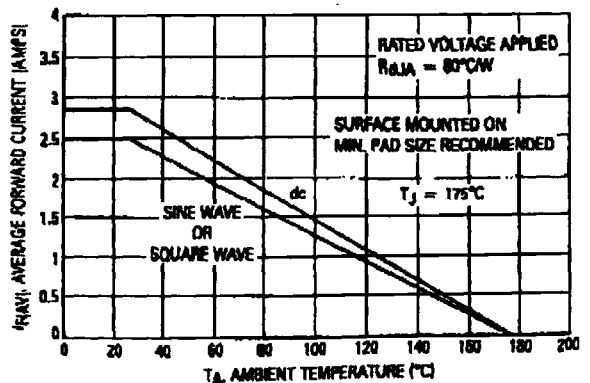


Figure 5. Current Derating, Ambient

MURD305, MURD310, MURD315, MURD320


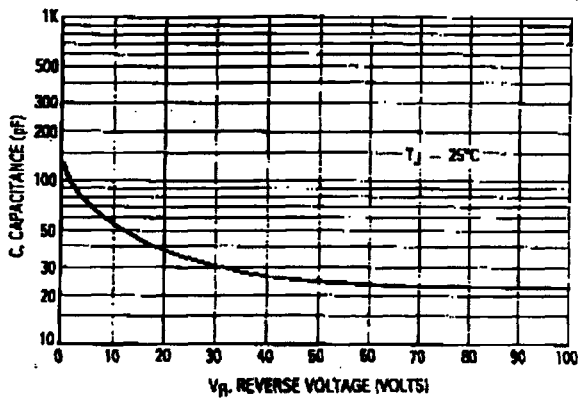


Figure 8. Typical Capacitance

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS

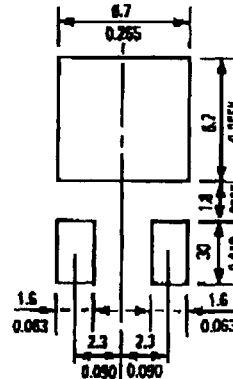

3

OUTLINE DIMENSIONS

