

PRODUCT DATASHEET CP17400_YASMEEN-50-S-C

YASMEEN-50-S-C

~15° spot beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

SPECIFICATION:

Dimensions Ø 49.9 mm 28.1 mm Height **ROHS** compliant yes 🕕



MATERIALS:

Component	Туре	Material	Colour	Finish
YASMEEN-50-S	Single lens	PMMA	clear	
YASMEEN-50-HLD-C	Holder	PC	black	


ORDERING INFORMATION:

» Box size: 476 x 273 x 305 mm

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP17400_YASMEEN-50-S-C	Single lens	252	112	28	8.9




PRODUCT CP17400_YASMEEN-50-S-C

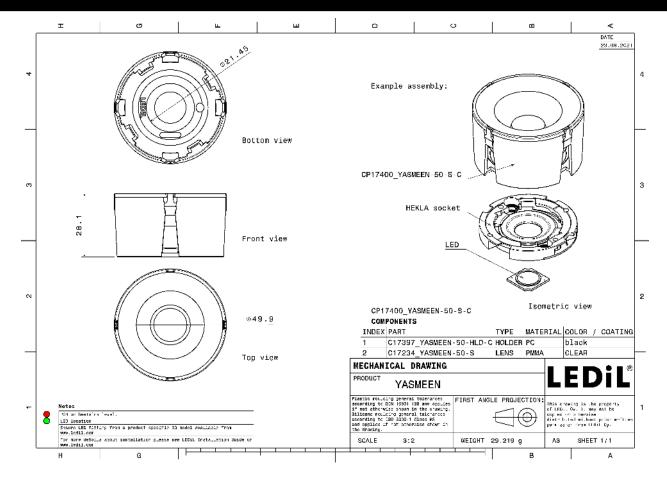


See also our general installation guide: www.ledil.com/installation_guide



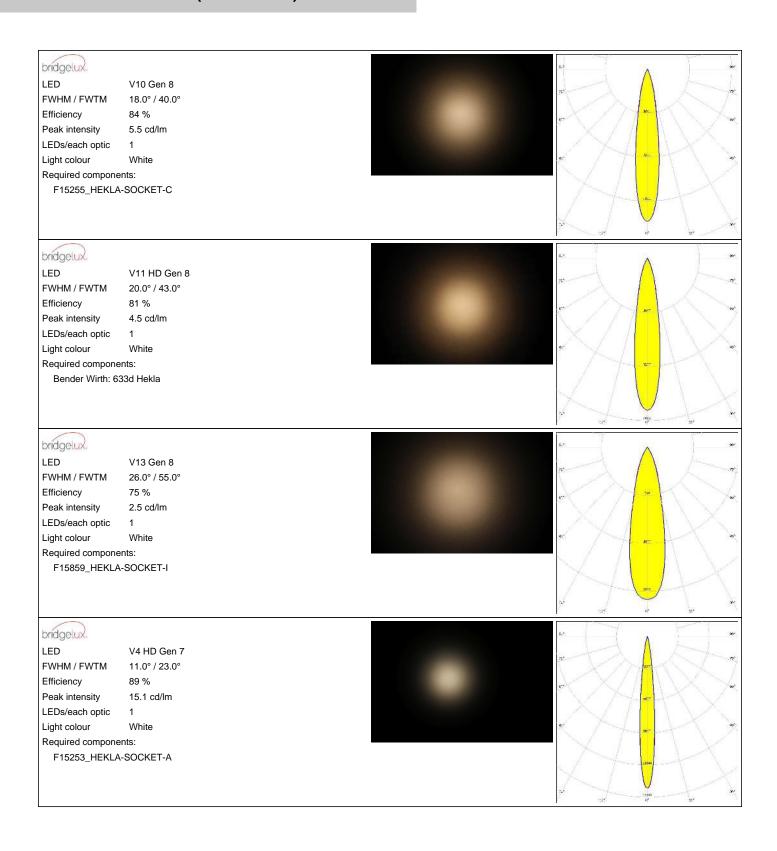



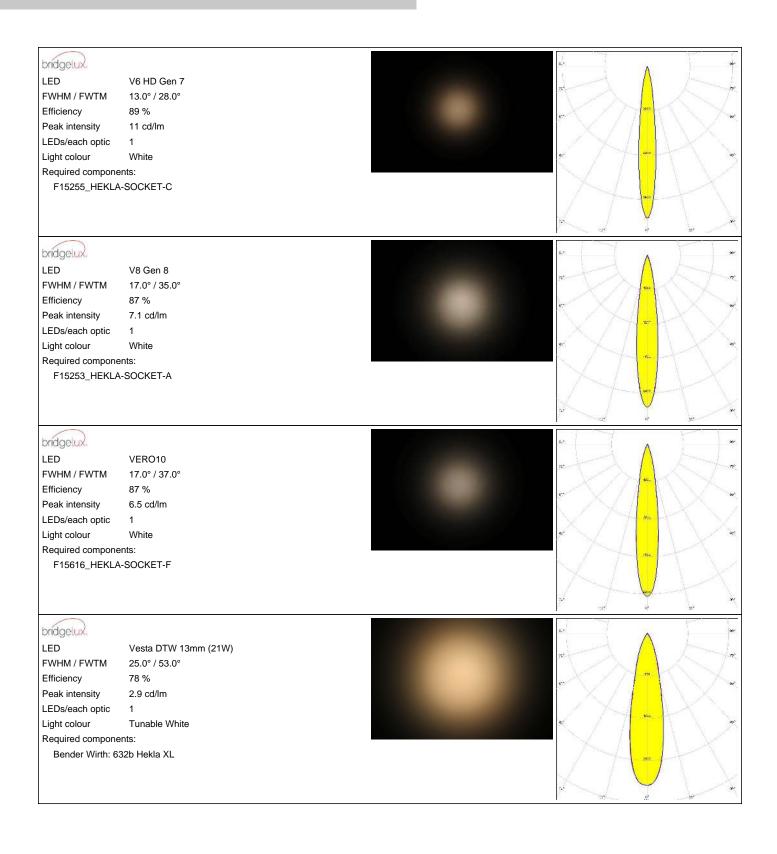





LED Vesta DTW 15mm (33W)


 $\begin{array}{lll} \text{FWHM} / \text{FWTM} & 26.0^{\circ} / 55.0^{\circ} \\ \text{Efficiency} & 75 \% \\ \text{Peak intensity} & 2.6 \text{ cd/lm} \\ \text{LEDs/each optic} & 1 \end{array}$

Light colour Tunable White

Required components:

Bender Wirth: 632b Hekla XL






bridgelux.

LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 18.0° / 37.0°
Efficiency 86 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 652b Hekla






CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 18.0° / 38.0°
Efficiency 86 %
Peak intensity 5.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17435_HEKLA-G2-C






CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 13.0° / 27.0° Efficiency 89 % Peak intensity 11.2 cd/lm LEDs/each optic 1

Light colour White Required components: F17435_HEKLA-G2-C







Published: 21/10/2020

6/16




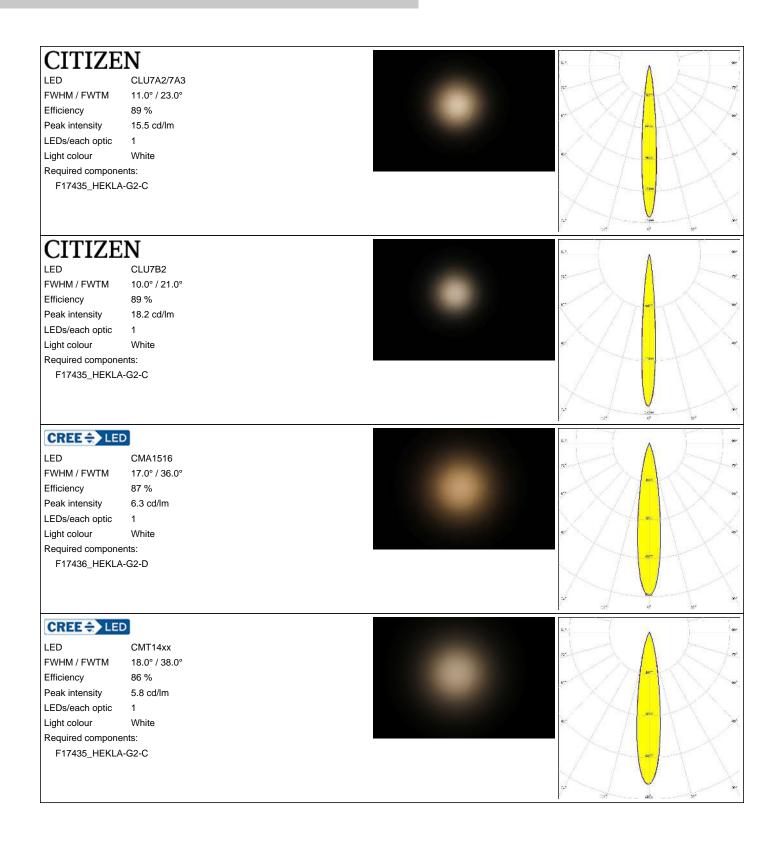




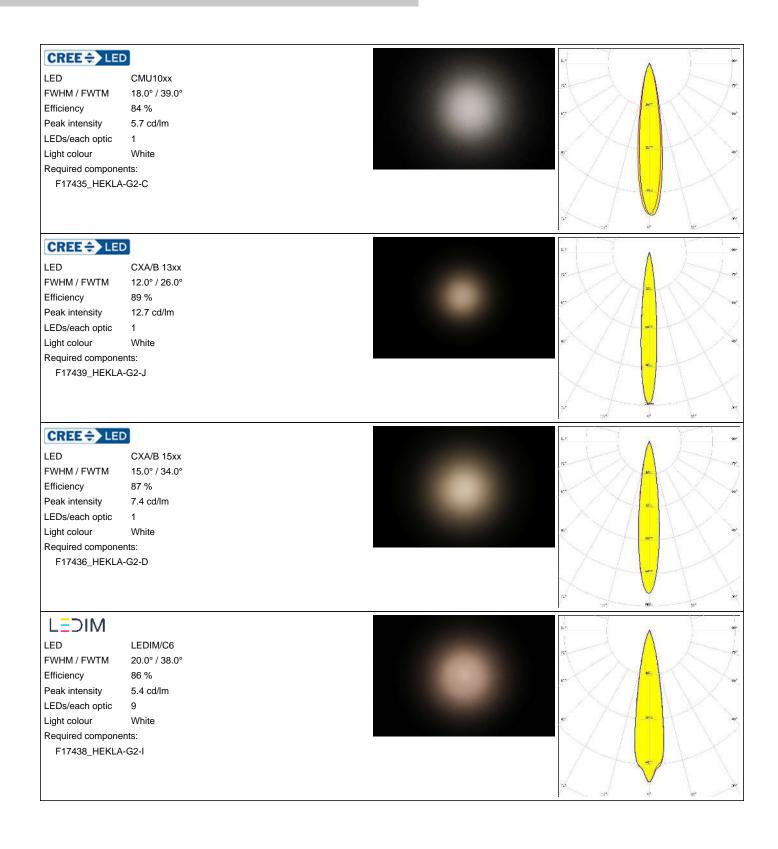



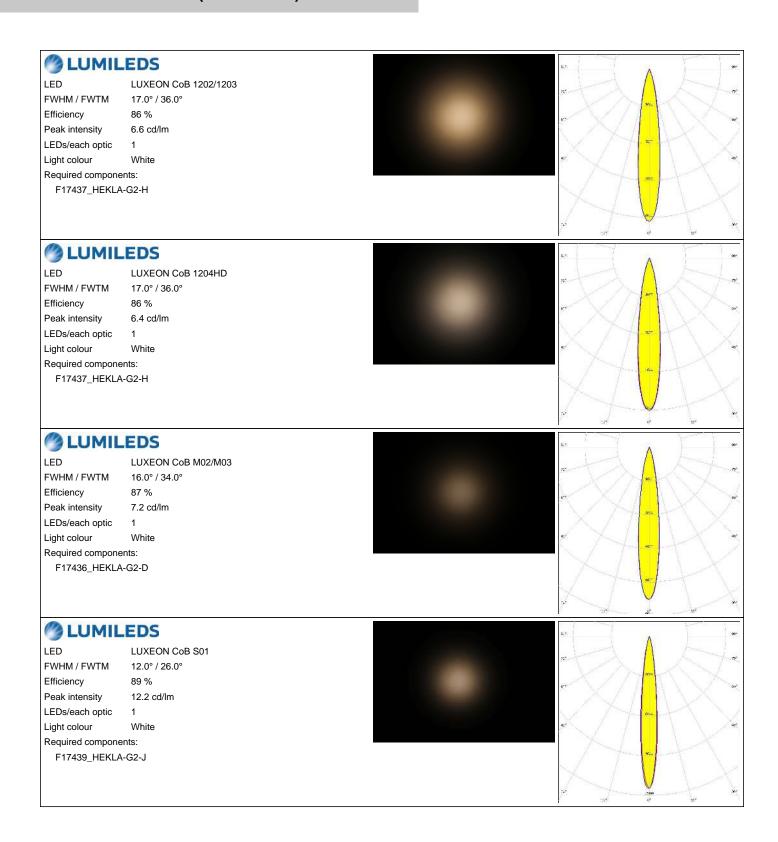



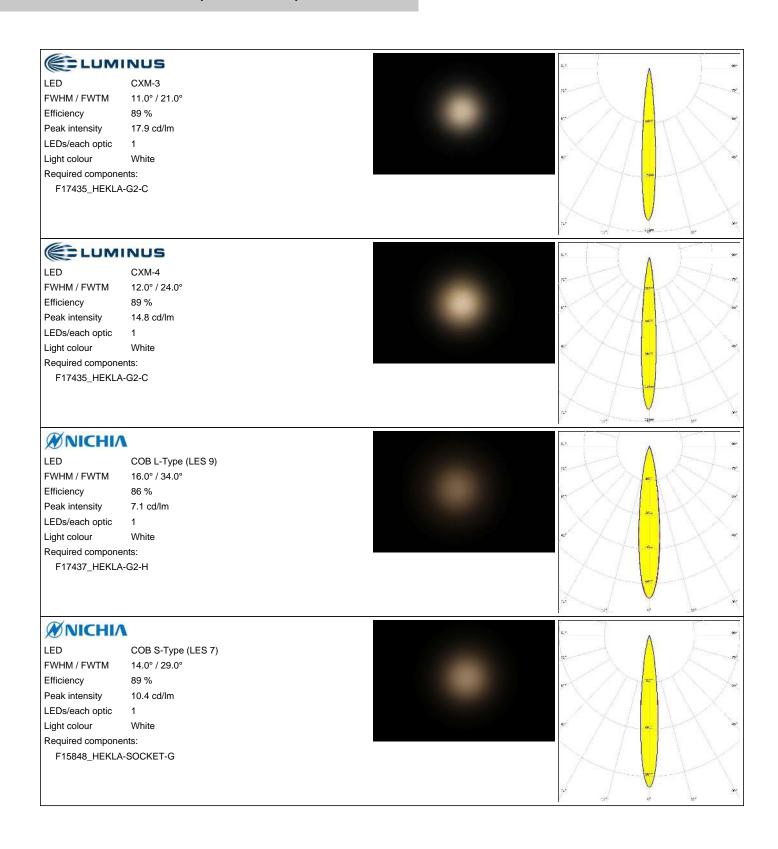


9/16



White

Light colour

Required components: F17435_HEKLA-G2-C

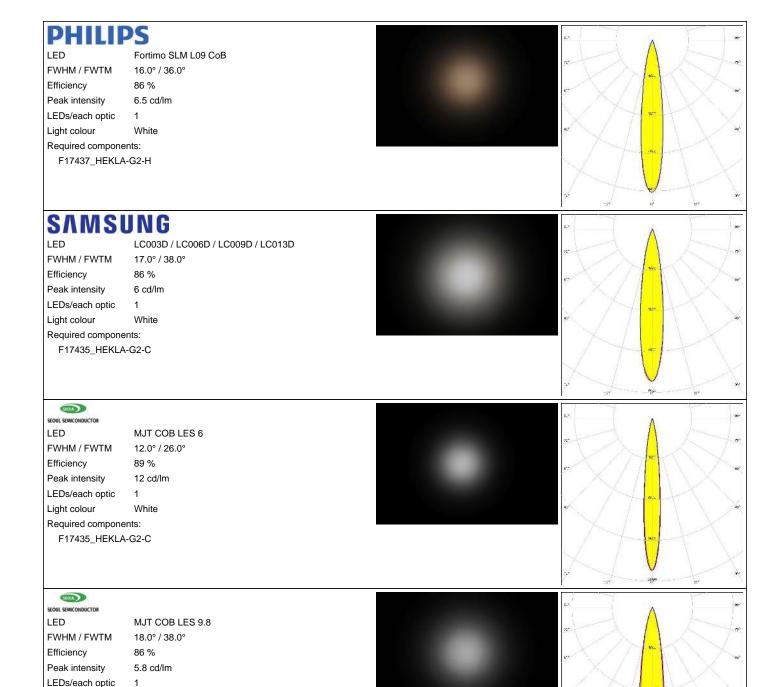



TRIDONIC LED SLE G7 LES09 FWHM / FWTM 16.0° / 36.0° Efficiency 87 % Peak intensity 6.7 cd/lm LEDs/each optic 1 Light colour White Required components: F17435_HEKLA-G2-C



bridgelux

LED V6 HD Gen 7

FWHM / FWTM 14.0° / 28.0° Efficiency 89 %


Peak intensity 10.5 cd/lm

LEDs/each optic 1
Light colour White

Light colour

Required components:

F17435_HEKLA-G2-C



bridgelux.

LED Vero SE 13


FWHM / FWTM 20.0° / 50.0° Efficiency 68 %

Peak intensity 3 cd/lm LEDs/each optic 1

Light colour White

Required components:

C16142_HEKLA-SOCKET-K



bridgelux

LED Vesta DTW 13mm (21W)

FWHM / FWTM 16.0° / 39.0°

Efficiency 84 %
Peak intensity 5.8 cd/lm

LEDs/each optic 1
Light colour White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 491 Typ L8 227 MA. 100.


bridgelux

LED Vesta TW 13mm (25W) CSP

FWHM / FWTM 28.0° / 46.0° Efficiency 88 % Peak intensity 3.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K






bridgelux

LED Vesta TW 9mm (12W) CSP

FWHM / FWTM 24.0° / 40.0° Efficiency 91 % Peak intensity 5.1 cd/lm LEDs/each optic Light colour White

Required components:


C16142_HEKLA-SOCKET-K



CITIZEN

LED CLU712/713 FWHM / FWTM 18.0° / 36.0° Efficiency 88 % Peak intensity 6.7 cd/lm LEDs/each optic 1 White Light colour

Required components: F17438_HEKLA-G2-I




CITIZEN

CLU7A2/7A3 FWHM / FWTM 12.0° / 24.0° Efficiency 90 % Peak intensity 13.5 cd/lm LEDs/each optic

Light colour White Required components:

F15255_HEKLA-SOCKET-C




CREE & LED

CHA0304 FWHM / FWTM 12.0° / 22.0° Efficiency 90 % Peak intensity 17.5 cd/lm LEDs/each optic White

Required components: F17435_HEKLA-G2-C

Light colour



Published: 21/10/2020





LED CHA0410


FWHM / FWTM 13.0° / 25.0° Efficiency 91 %

Peak intensity 13.6 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17435_HEKLA-G2-C



CREE - LED

LED CHA0612


FWHM / FWTM 14.0° / 28.0°

Efficiency 90 %
Peak intensity 10.7 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17435_HEKLA-G2-C



CREE = LED

LED CHA0825

FWHM / FWTM 18.0° / 36.0°


Efficiency 88 %

Peak intensity 6.9 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17438_HEKLA-G2-I



CREE - LED

LED CMA1306

FWHM / FWTM 14.0° / 30.0°


Efficiency 89 %
Peak intensity 10.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F17439_HEKLA-G2-J







LED NVCWJ024Z-V1MT: COB J-Type Tunable White

FWHM / FWTM 22.0° / 42.0°
Efficiency 88 %
Peak intensity 4.9 cd/lm
LEDs/each optic 1
Light colour White


Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 498 Typ L8 HV

TRIDONIC

LED SLE G7 LES13
FWHM / FWTM 25.0° / 50.0°
Efficiency 81 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I



Published: 21/10/2020



PRODUCT DATASHEET CP17400_YASMEEN-50-S-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

16/16

www.ledil.com/ where_to_buy