



| DATE | REV | ECN | APP'D. BY |
|----------|-----|-------|-----------|
| 11/06/19 | A0 | - | JME |
| 12/04/19 | A1 | 11483 | ADB |
| | | | |
| | | | |

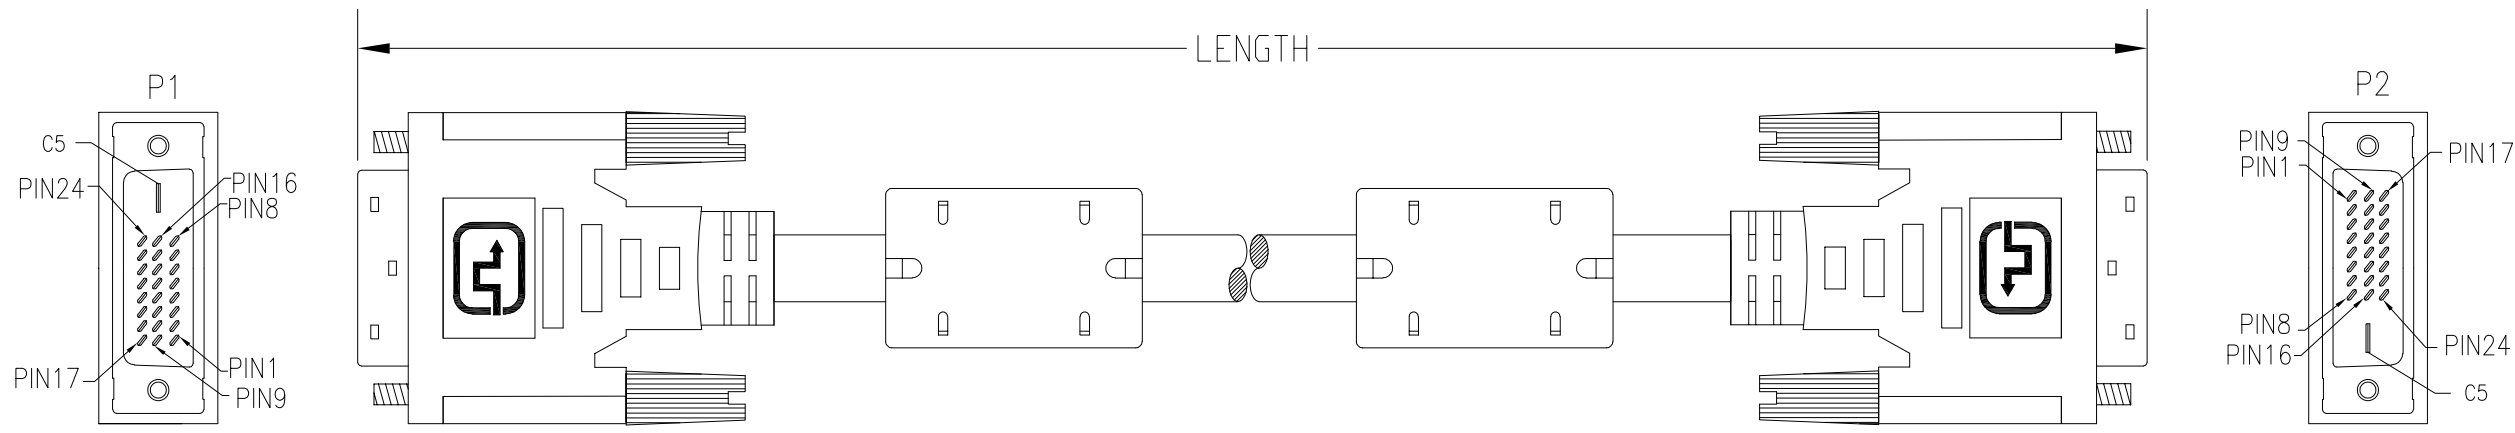

PART NUMBER KEY

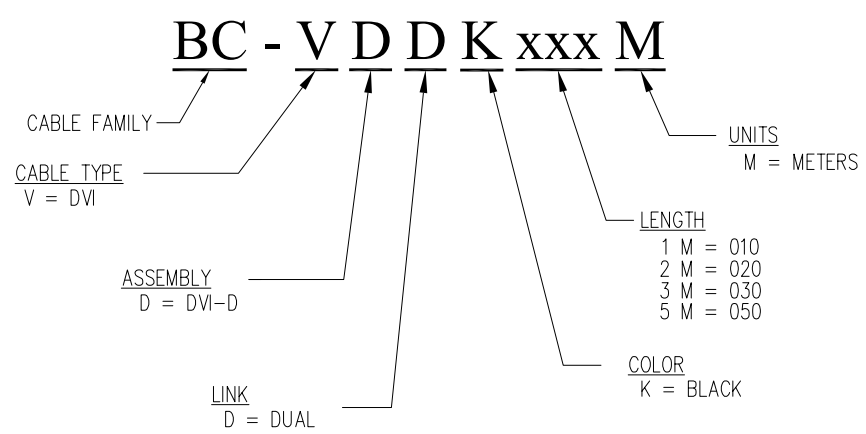


O/A Length Tolerance:

| Metric | |
|---------------|-------|
| 0 ~ 200mm | ±10mm |
| 201 ~ 1000mm | ±20mm |
| 1001 ~ 1500mm | ±25mm |
| 1501 ~ 2100mm | ±30mm |
| >2100mm | ±40mm |

| Imperial | |
|-----------|---------|
| 0 ~ 1ft | ±0.5in |
| 2ft ~ 3ft | ±0.75in |
| 4ft ~ 7ft | ±1.0in |
| > 7ft | ±1.5in |

WIRING MAP

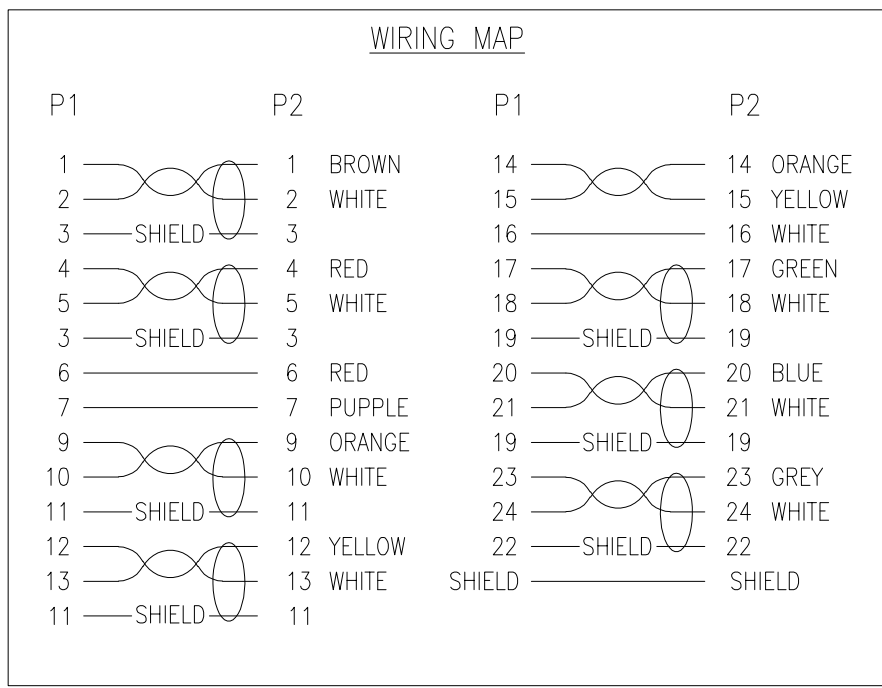

| TYPICAL PART NUMBERS | |
|----------------------|----------------------|
| PART NUMBER | LENGTH METERS [FEET] |
| BC-VDDK010M | 1 [3.28] |
| BC-VDDK020M | 2 [6.56] |
| BC-VDDK030M | 3 [9.84] |
| BC-VDDK050M | 5 [16.4] |

FOR PART NUMBERS NOT SHOWN FOLLOW PART NUMBER KEY FORMAT

NOTES:

- EACH CABLE ASSEMBLY INDIVIDUALLY BAGGED
- CONNECTOR (P1): DVI 25 MALE, GOLD PLATING ON CONTACTS, GOLD CONNECTOR, BLACK INSULATOR
- CONNECTOR (P2): DVI 25 MALE, GOLD PLATING ON CONTACTS, GOLD CONNECTOR, BLACK INSULATOR
- WIRE CONSTRUCTION: UL20276; BLACK JACKET, OD 0.338" [8.6mm]
- FERRITE CORE: 0.7 x 1.12 x 0.41", MOLDED BLACK PVC

| | | | |
|--|--|---|----------------|
| THIRD ANGLE PROJECTION | | 206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com | |
| DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE | | TITLE: DVI-D DUAL LINK TO DVI-D DUAL LINK (24+1 TYP.) CABLE WITH FERRITE CORE | |
| DIMENSIONS: INCHES [METRIC] | THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC. | DRN BY: BTS | DATE: 11/06/19 |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1° | | APPD BY: JME | DATE: 11/06/19 |
| SHEET NO. 1 OF 1 | | DWG NO. CT999211 | REV. A1 |

