# 2170112-2 - ACTIVE

### QSFP/QSFP+

TE Internal #: 2170112-2 QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 1, Customer Applied Gasket, Included Lightpipe, Standard, Data Rate (Max) 14 Gb/s, 1 Port, QSFP/QSFP+

#### View on TE.com >





Pluggable I/O Product Type: Cage Assembly Port Matrix Configuration: 1 x 1 EMI Containment Feature Type: Customer Applied Gasket Thermal Accessory Type Included: Heat Sink Included Lightpipe: Yes

## Features

## **Product Type Features**

Form Factor	QSFP+
Cage Туре	Single
Pluggable I/O Product Type	Cage Assembly
Thermal Accessory Type Included	Heat Sink
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Port Matrix Configuration	1 x 1
Number of Ports	1
Lightpipe Configuration	Dual Round
Number of Rear EONs per Port Column	2
Electrical Characteristics	
Data Rate (Max)	14 Gb/s
Body Features	
Heat Sink Finish	Anodized Black
Heat Sink Style	Pin



QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 1, Customer Applied Gasket, Included Lightpipe, Standard, Data Rate (Max) 14 Gb/s, 1 Port, QSFP/QSFP+



Heat Sink Height Class	SAN
Heat Sink Height	6.5 mm[.256 in]
Contact Features	
PCB Contact Termination Area Plating Material	Tin
Termination Features	
Termination Post & Tail Length	2.2 mm[.086 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver
Dimensions	
PCB Thickness (Recommended)	1.45 mm[.057 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
For Use With Pluggable I/O Products	QSFP Cable Assembly, QSFP MSA Compatible Transceiver
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray
Other	
EMI Containment Feature Type	Customer Applied Gasket
Included Lightpipe	Yes
Enhancements	Standard

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 1, Customer Applied Gasket, Included Lightpipe, Standard, Data Rate (Max) 14 Gb/s, 1 Port, QSFP/QSFP+



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.


## Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## **Compatible Parts**

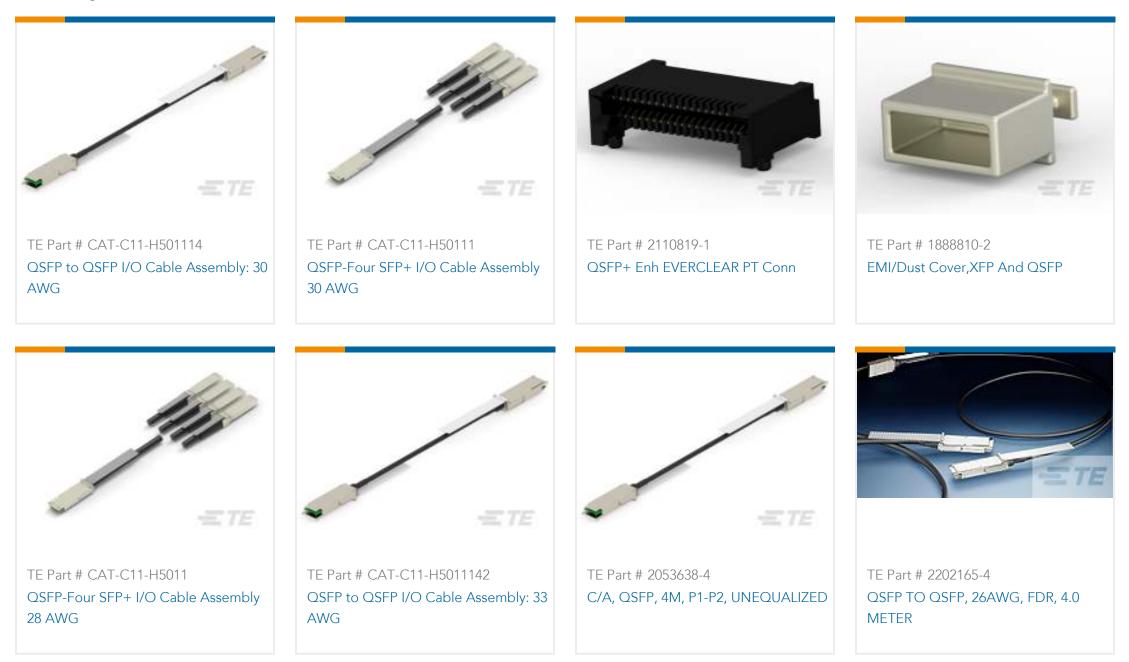

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 1, Customer Applied Gasket, Included Lightpipe, Standard, Data Rate (Max) 14 Gb/s, 1 Port, QSFP/QSFP+




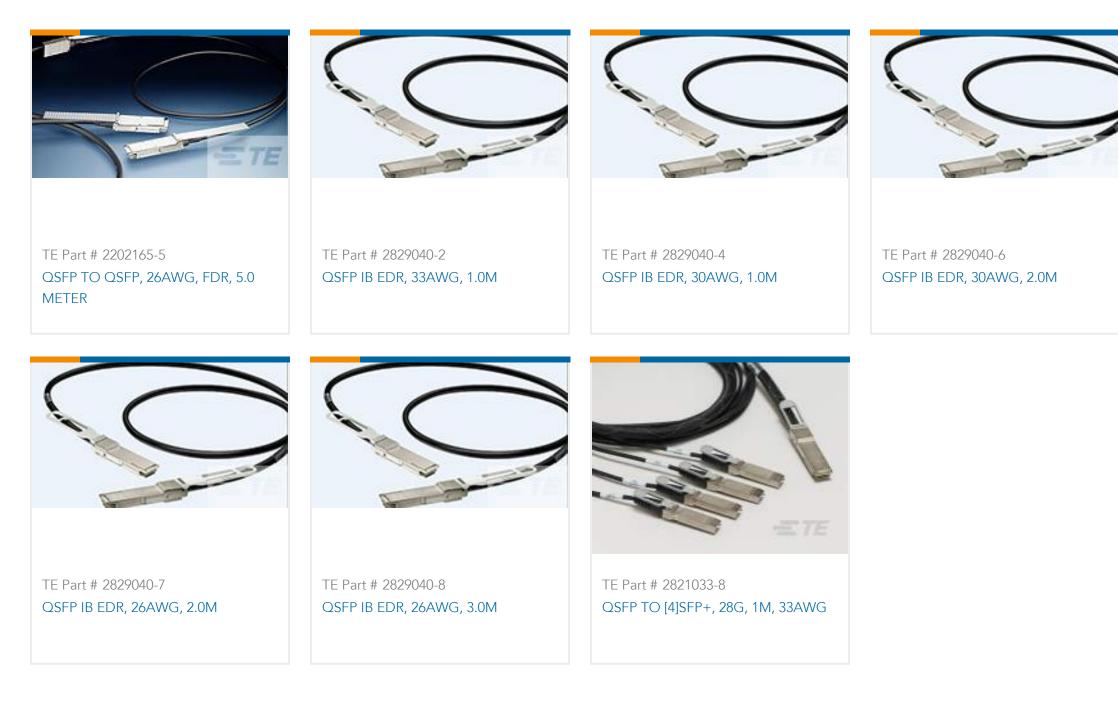

# Also in the Series **OSFP/OSFP+**




# Customers Also Bought

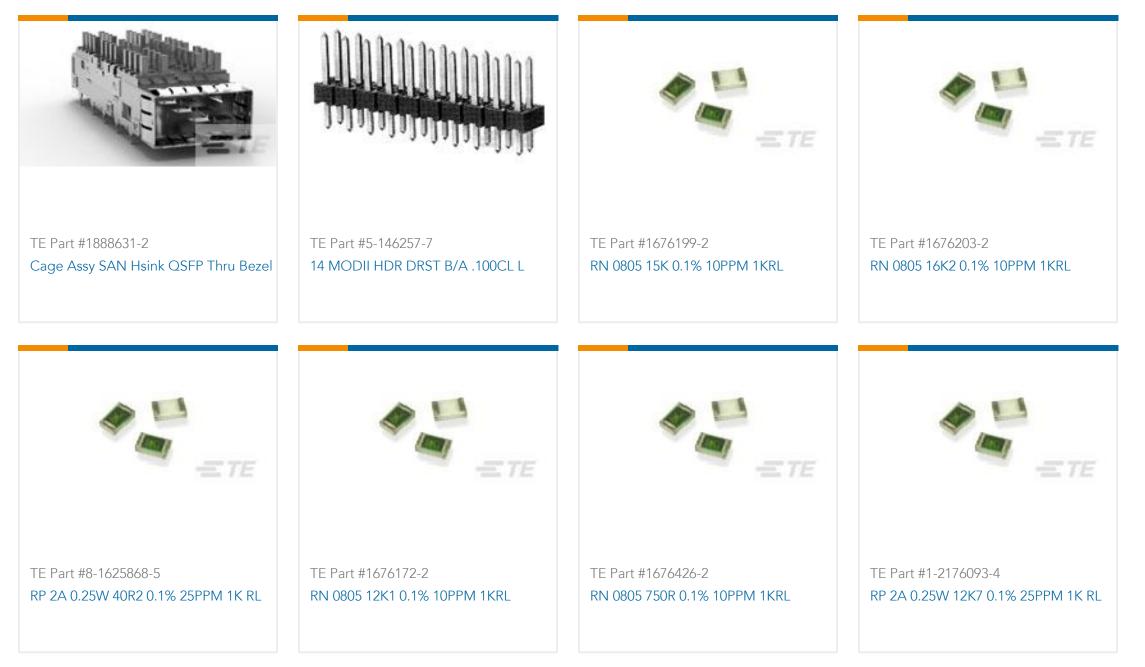

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 1, Customer Applied Gasket, Included Lightpipe, Standard, Data Rate (Max) 14 Gb/s, 1 Port, QSFP/QSFP+



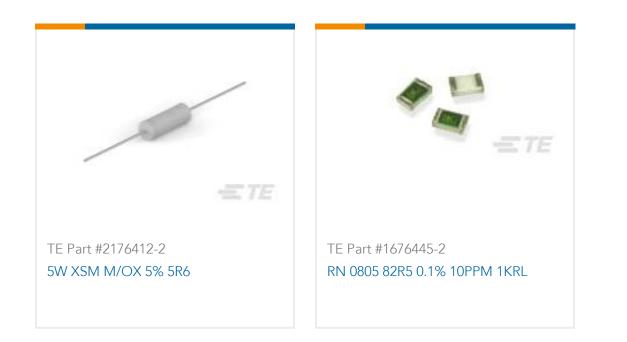

## Documents

## Product Drawings

## Cage Assy SAN Hsink QSFP Behind Bezel

English

## **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2170112-2\_4.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2170112-2\_4.3d\_igs.zip

English

Customer View Model

## ENG\_CVM\_CVM\_2170112-2\_4.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

**Application Specification** 

English