



specifications



Consumption	Base	Voltage	CRI	Lens	Heat Sink	L70 hours	Beam Angle	Ambient Temp (F)	Power Factor	UL listing	THD
1.4 W	G4	10-30 V ⚡⚡⚡	> 80	n/a	aluminum	50,000	180°	-40° - 113°	> 0.9	IP40	< 20%

select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-G4BR-W120-30	3000K	148	105 lm / W
GI-G4BR-C120-30	5000K	165	117 lm / W

other

Dimensions	Warranty	Gross Weight	Case QTY
1.34" x 0.55"	6 years	0.70 ounce	1 pcs

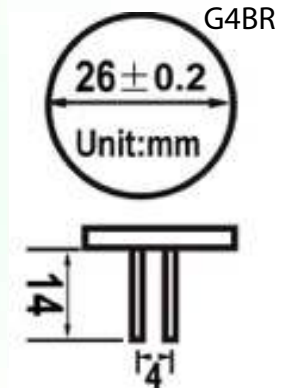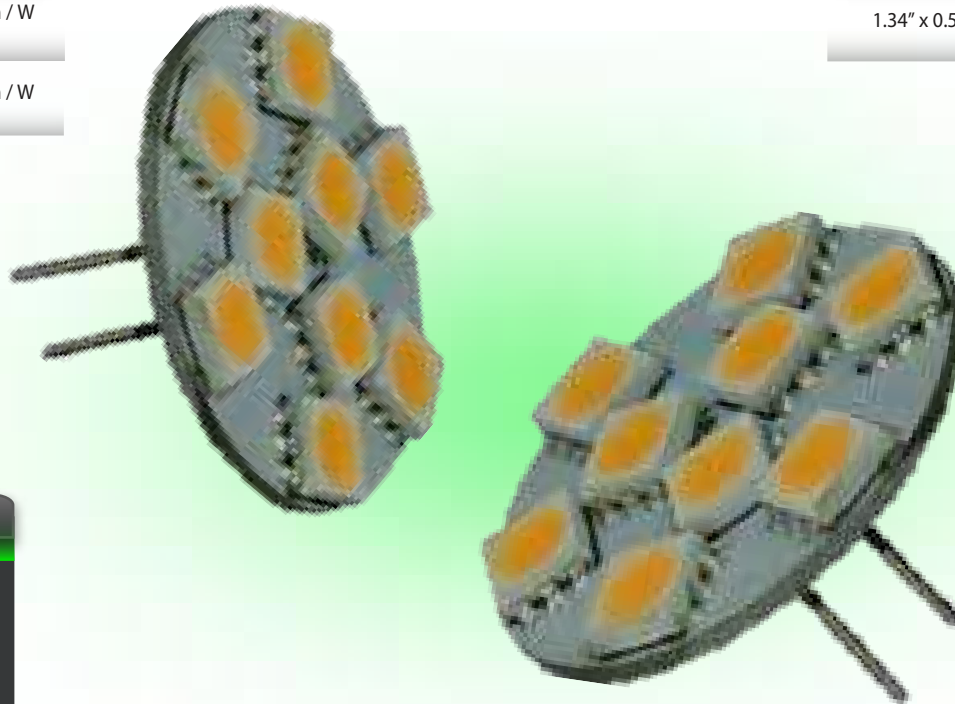

Features

- No UV or IR radiation
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- 90% energy savings compared to halogen lamps

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

