
2308171-5 - ACTIVE

zQSFP+/QSFP28 TE Internal #: 2308171-5 QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 2, Internal/External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28

View on TE.com >

Connectors > Pluggable IO Connectors & Cages > QSFP, QSFP+ & zQSPF+

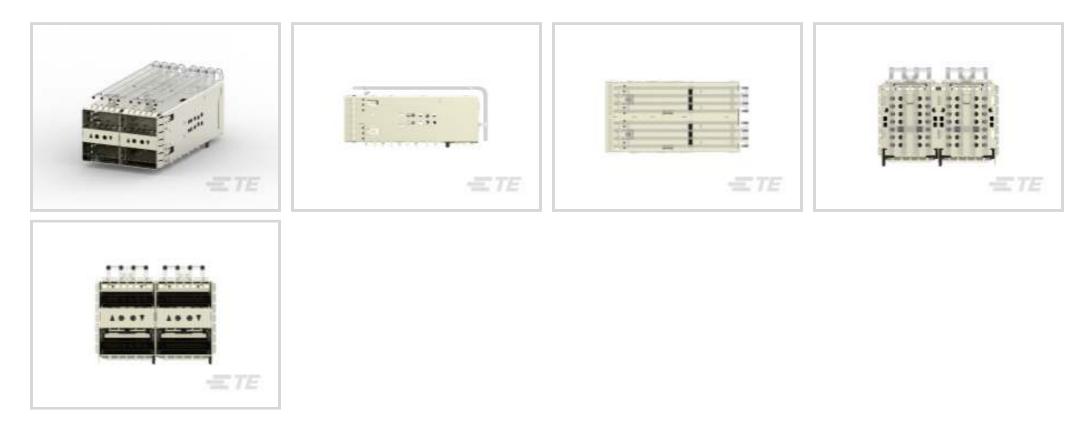

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Port Matrix Configuration: 2x2

EMI Containment Feature Type: Internal/External EMI Springs

Included Lightpipe: Yes

Enhancements: Standard

Features

E T E connectivity

Product Type Features

Form Factor	zQSFP+
Pluggable I/O Accessory Type	Lightpipe
Cage Туре	Stacked
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Configuration Features Port Matrix Configuration	2 x 2
	2 × 2 4
Port Matrix Configuration	
Port Matrix Configuration Number of Ports	4
Port Matrix Configuration Number of Ports Lightpipe Configuration	4 Inner Left Indicator Up

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 2, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28



Contact Mating Area Plating Material Thickness	30 μm[.76 μin]
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	.5 A
Termination Features	
Termination Post & Tail Length	2 mm[.079 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver Alloy
Centerline (Pitch)	.8 mm[.032 in]
Dimensions	
PCB Thickness (Recommended)	3 mm
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
On anotion (Annulisation	

Operation/Application

Heat Sink Compatible	No
For Use With Pluggable I/O Products	QSFP28 Cable Assembly
Pluggable I/O Applications	QSFP28
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray
Other	
EMI Containment Feature Type	Internal/External EMI Springs
Included Lightpipe	Yes
Enhancements	Standard

Product Compliance

For compliance documentation, visit the product page on TE.com>

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 2, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | zQSFP+/QSFP28

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 2, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28





Customers Also Bought

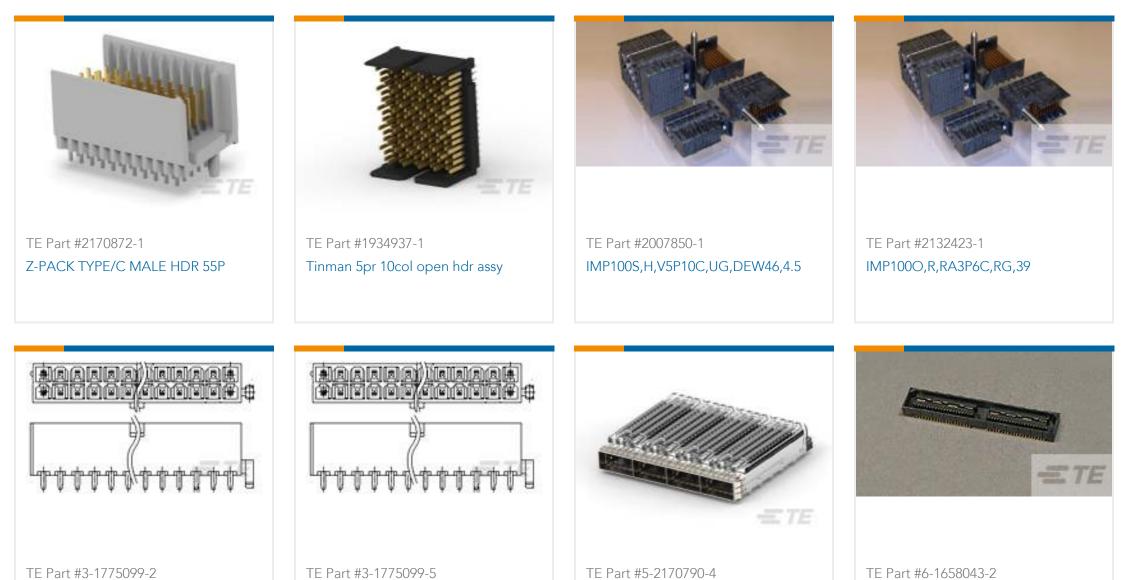

ATX PWR CONN 1 BDLK 8 POS

ATX PWR CONN 1 BDLK 14 POS



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2308171-5_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2308171-5_A.3d_igs.zip

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 2, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28



English

Customer View Model ENG_CVM_CVM_2308171-5_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English