



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00502	Connector, stereo plug, 3.5xL20.5 mm, brass, gold plated, molding style	1	
2	30-00653	Wire, 2C TS, 28 AWG, 150V, 70C, 2.6 mm, spiral shield, TPU, WBL	1	Bio-compatible jacket
3	24-00028	Overmold, TPE	1	black
4	Heat Shrink	Heat shrink tube	1	black
5	Heat Shrink	Heat shrink tube	1	black, covers shield wire

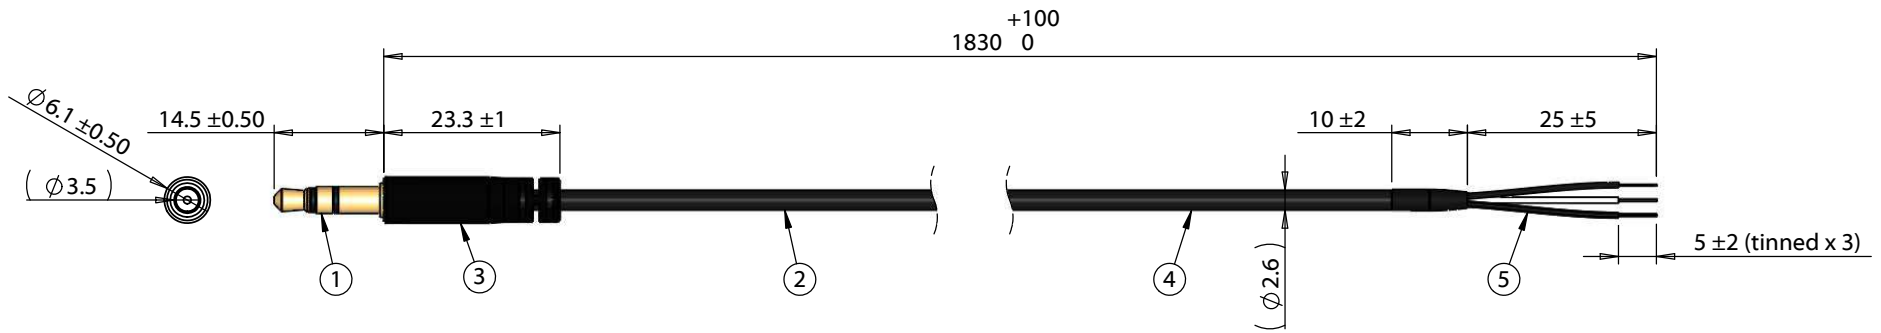

Wiring Diagram	
50-00502	wire color
A	white
B	black
C	shield

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	10/20/2015	Initial release	GL <small>Digitally signed by GL Date: 2018.03.23 16:27:05 -07'00'</small>	RoHS compliant	
A1	11/11/2015	Modified overmold material	Verified: PS <small>Digitally signed by PS Date: 2018.03.27 13:23:58 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
A2	01/07/2016	Modified dimensions	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5 mm 3C 50-00502 slim audio plug to 5 mm tinned, 28 AWG, 30-00653, shielded, WBL	
				Scale: 1:2	

Size:	Part number:
A	10-02045
Scale: 1:2	Sheet 1 of 1

5 4 3 2 1