



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	13JUN2023	BDA	MB

PART AS SUPPLIED

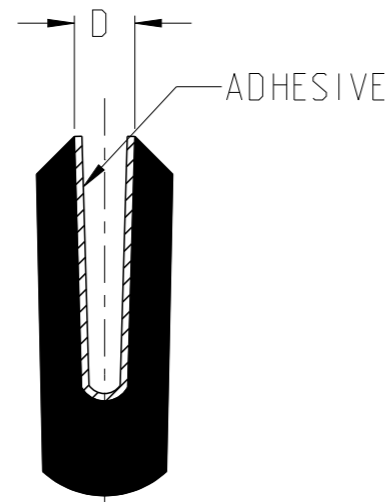

PART FULLY RECOVERED

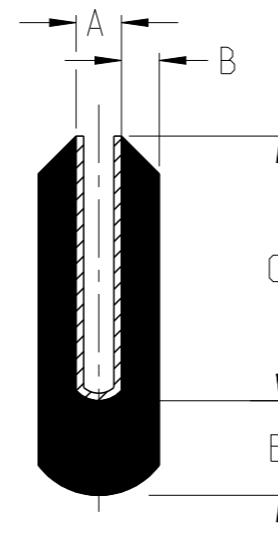

PRODUCT DIMENSIONS

PART NUMBER	AS SUPPLIED		AS RECOVERED							
	D MINIMUM		A MAXIMUM		B MINIMUM		C MINIMUM		E NOMINAL	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
TPEM-NR6	0.80	0.031	0.60	0.024	0.50	0.020	3.50	0.138	1.25	0.049
TPEM-NR7	1.60	0.063	1.00	0.039	0.90	0.035	4.80	0.189	1.25	0.049
TPEM-NR8	2.50	0.098	2.00	0.079	0.90	0.035	6.60	0.260	2.25	0.089
TPEM-NR9	4.50	0.177	4.20	0.165	0.90	0.035	13.50	0.531	2.20	0.087
TPEM-NR11	1.60	0.063	1.50	0.059	0.80	0.031	4.90	0.193	1.35	0.053

PRODUCT INFORMATION


1. FLAME RETARDED
2. SECTION: HEAT-SHRINKABLE, THERMALLY STABILISED, IRRADIATED, POLYOLEFIN  
ADHESIVE: RAYCHEM HOT-MELT ADHESIVE
3. STANDARD SUPPLIED LENGTH: 1.2 METRES
4. COLOUR: BLACK
5. TUBING CUT TO SPECIFIC LENGTHS CAN BE SUPPLIED FROM THE PRODUCT SIZES REFERENCED WITHIN THIS DRAWING

STANDARD CUTTING TOLERANCES(mm)

CUT LENGTH	TOLERANCE
UPTO TO 9.90mm	±1.50mm
10mm TO 24.90mm	±1.50mm
25mm TO 54.90mm	±1.50mm
55mm TO 99.90mm	±3.00mm
100mm TO 149.90mm	±4.00mm
150mm TO 499.90mm	±5.00mm
500mm AND GREATER	±25.40mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm(inches)



MATERIAL  
SEE NOTES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 PLC ±
- 1 PLC ±
- 2 PLC ±0.1
- 3 PLC ±0.01
- 4 PLC ±0.001
- ANGLES ±
- FINISH -

DWN 13JUN2023

CHK BASAVARAJA D A

13JUN2023

SELVAPANDIAN B

APVD 13JUN2023

MAYO BAKARE

PRODUCT SPEC

RK-6029

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

NAME  
TPEM



TE Connectivity

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 - C-TPEM -

SCALE NTS SHEET 1 OF 1 REV A