


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.			
		A ±.03	W ±.01	C ±.02	M ±.03
P10-610R	#6, #8, #10	.90 (22.9)	.37 (9.4)	.31 (7.9)	.62 (15.8)

1. UL LISTED AND CSA CERTIFIED FOR:
A. #14-10 AWG SOLID OR STRANDED
COPPER WIRE
B. 302° F (150° C) MAX. TEMP. RATING
2. MATERIAL:
A. STAMPING - .04" (1.02) THK COPPER,
TIN PLATED
3. PACKAGE QTY: STD. PKG. -L=50
BULK PKG. -D=500
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS:
A. UL LISTED AND CSA CERTIFIED: CT-100,
CT-200, CT-570, CT-1570
B. PANDUIT APPROVED: CT-160, CT-260
6. WIRE STRIP LENGTH: 9/32 ^{+1/32} (7.1 ⁺⁸ .0)

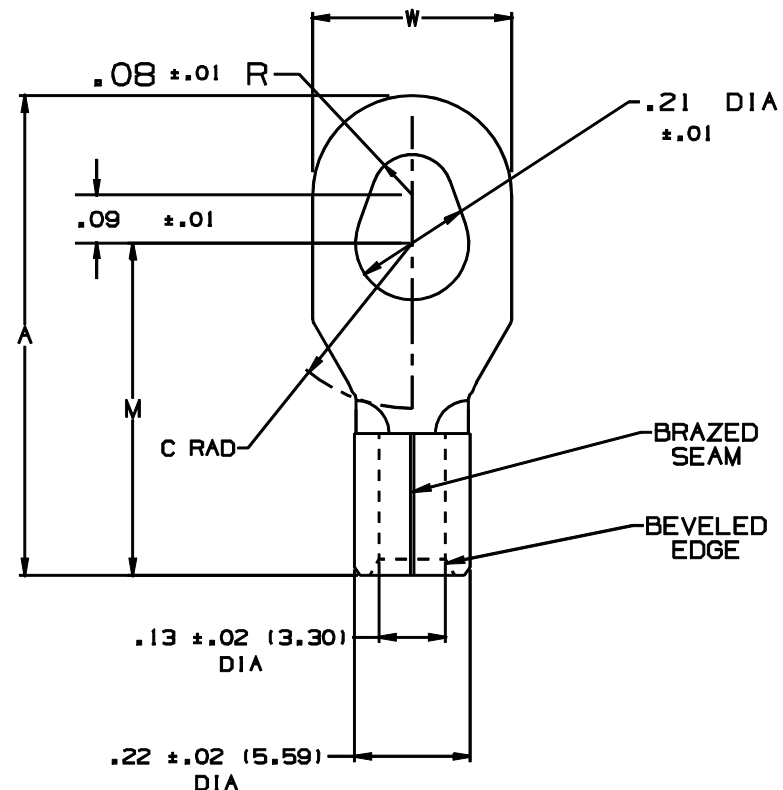

A41590_01

								 PANDUIT CORP. TINLEY PARK, ILLINOIS			
01	1/01	KMD		FILE SPEC. WAS N41590AA_PCD_01				P10-610R, NON-INSULATED MULTI-STUD TERMINAL			
00	3/96	ED		RELEASED	04178						
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								EJD		NONE	A41590