


NOTE:

1. OVER MOLDED WITH BLACK PVC RESIN 95 DEG INNER MOLD WITH PE
2. ELECTRICAL AND MECHANICAL PERFORMANCE PLS REFER USB INDUSTRY STANDARD.
3. THIS PRODUCT MUST MEET EU 2002/95 EC.

WIRE CHART

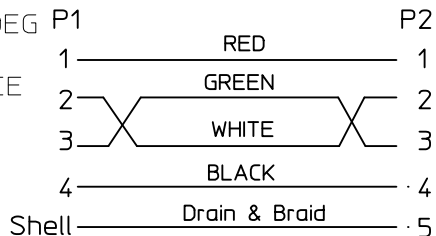

G	HST	18REF	1
F	COP.FOIL #P389H(47MM X20M)	NA	
E	HST OD=5	15REF	1
D	USB 2.0 CABLE 28/1P+28/2C BLACK OD=3.8mm	100 REF.	1
C	USB A (FEMALE)		1
B	JST#SPH-002-P0.5S		5
A	JST#PHR-5		1
ITEM	DESCRIPTION	L(mm)	QTY.

ENTER DESCRIPTION EC NO: CPG2013-1205 DRWN:FZHANG01 CHKD:KEN APPR:XAWANG	QUALITY SYMBOLS $\nabla_A=0$ $\nabla_F=0$ $\nabla_P=1$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY			METRIC		
				mm	INCH	DRAWN BY	DATE		TITLE
						FZHANG01	2012/10/29		USB A 2.0 TO PHR 5PIN 110MM EUR/PACE
REV A	DESCRIPTION 2012/10/29 2012/10/29 2012/10/29			CHECKED BY	DATE			MATERIAL NO. <b>687680140</b>	
				KEN	2012/10/29				
				APPROVED BY	DATE				DOCUMENT NO. <b>SD-68768-040</b>
				XAWANG	2012/10/29				
		ANGULAR $\pm$ ----		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							