



SURFACE MOUNT

Power Splitter/Combiner **SCA-4-10-75+**

4 Way-0° 75Ω 10 to 1000 MHz

FEATURES

- Wideband, 10-1000 MHz
- High isolation, 25 dB typ.
- Good amplitude unbalance, 0.5 dB typ.



Generic photo used for illustration purposes only

CASE STYLE: DZ943

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Cellular
- UHF/VHF receivers/transmitters

ELECTRICAL SPECIFICATIONS AT 25°C¹

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		10		1000	MHz
Insertion Loss, above 6.0 dB	10-400		1.2	2.3	dB
	400-650		1.5	2.2	
	650-1000		2.0	2.5	
Isolation	10-400	22	30		dB
	400-650	18	25		
	650-1000	15	20		
Phase Unbalance	10-400			6	Degree
	400-650			9	
	650-1000			10	
Amplitude Unbalance	10-400			1.2	dB
	400-650			0.9	
	650-1000			0.9	


1. Tested on Evaluation Board TB-SCA-4-10-75+

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

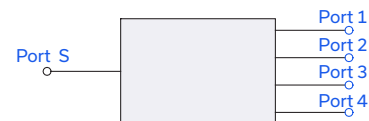



SURFACE MOUNT

Power Splitter/Combiner **SCA-4-10-75+**

4 Way-0° 75Ω 10 to 1000 MHz


PIN CONNECTIONS

SUM PORT (PORT S)	3
PORT 1	6
PORT 2	7
PORT 3	9
PORT 4	10
GROUND	1,2,4,5,8

***PRODUCT MARKING:** SCA-4-10-75

*Marking may contain other features or characters for internal lot control


EVALUATION BOARD MCL P/N: TB-SCA-4-10-75+ SUGGESTED PCB LAYOUT (PL-133)

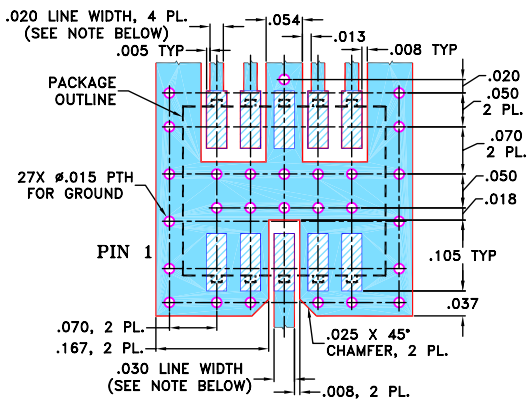


NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS 0.030 ± 0.002 ", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

OUTLINE DRAWING

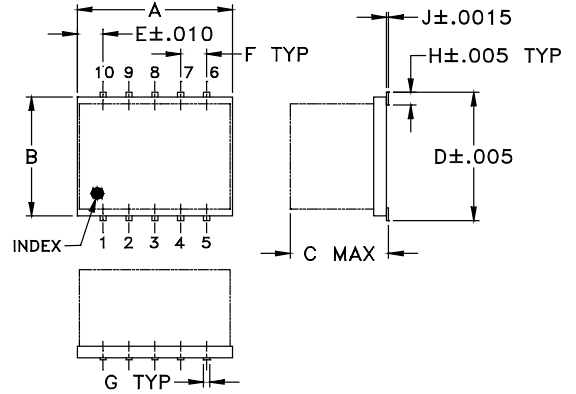

PCB Land Pattern



OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G
.30	.250	.190	.266	.050	.050	.012
7.62	6.35	4.83	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	0.5	

TAPE & REEL INFORMATION: F34



SURFACE MOUNT




Power Splitter/Combiner SCA-4-10-75+

4 Way-0° 75Ω 10 to 1000 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ¹ (dB)				Amplitude Unbalance (dB)	Isolation (dB)			Phase Unbalance (deg.)	VSWR (:1)				
	S-1	S-2	S-3	S-4		1-2	1-3	2-3		S	1	2	3	4
10.00	7.21	6.78	7.13	7.53	0.74	34.55	47.68	47.34	1.86	1.11	1.61	1.48	1.51	1.64
50.00	7.12	6.75	7.07	7.43	0.68	55.90	49.10	48.97	0.85	1.05	1.52	1.42	1.46	1.57
100.00	7.16	6.77	7.10	7.48	0.71	54.20	51.26	50.69	0.94	1.14	1.51	1.43	1.46	1.55
200.00	7.22	6.87	7.17	7.53	0.66	40.79	65.07	60.68	1.45	1.28	1.50	1.44	1.45	1.52
300.00	7.28	6.95	7.24	7.56	0.61	33.63	48.42	44.66	2.13	1.41	1.48	1.45	1.44	1.49
400.00	7.30	7.01	7.27	7.56	0.55	28.11	38.54	36.47	2.40	1.49	1.46	1.46	1.43	1.45
500.00	7.35	7.03	7.31	7.59	0.56	24.85	34.71	32.80	2.83	1.50	1.42	1.44	1.41	1.41
600.00	7.37	7.02	7.32	7.60	0.58	22.50	32.13	30.41	2.98	1.48	1.38	1.40	1.38	1.36
650.00	7.39	7.04	7.35	7.63	0.59	21.50	30.85	29.23	3.11	1.48	1.36	1.39	1.36	1.34
700.00	7.46	7.11	7.40	7.67	0.56	20.63	30.04	28.44	3.53	1.49	1.34	1.37	1.34	1.33
750.00	7.50	7.14	7.43	7.70	0.56	19.98	29.78	28.11	3.53	1.51	1.32	1.34	1.33	1.31
800.00	7.54	7.15	7.45	7.75	0.59	19.37	29.15	27.66	3.59	1.53	1.31	1.32	1.31	1.30
900.00	7.64	7.26	7.54	7.82	0.56	18.17	28.23	26.83	4.14	1.55	1.28	1.27	1.29	1.29
950.00	7.73	7.31	7.60	7.88	0.57	17.63	27.54	26.25	4.30	1.56	1.27	1.25	1.26	1.29
1000.00	7.84	7.40	7.67	7.98	0.57	17.09	26.99	25.74	4.59	1.59	1.26	1.24	1.25	1.29

1. Total Loss = Insertion Loss + 6.0 dB splitter loss.

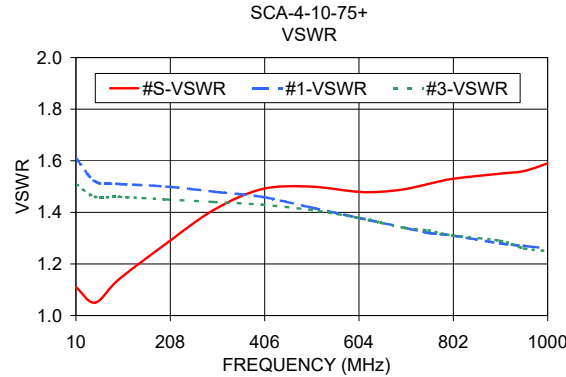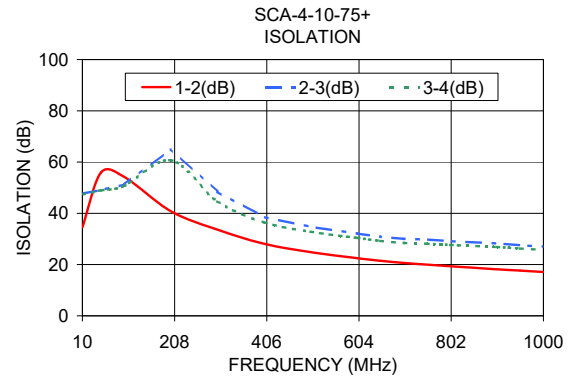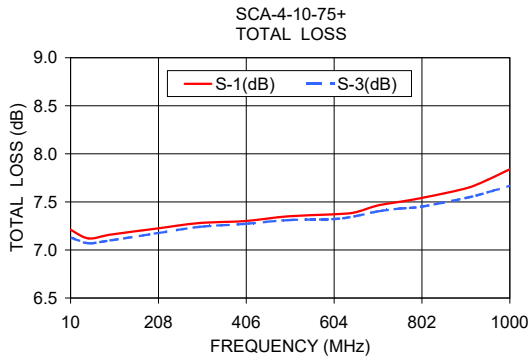

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

