

- Shrink Temperature  
212°F (100°C)
- Ideal Finish For Cosmetic Applications
- Heat Resistance Up To 221°F (105°C)
- Excellent Oil, Moisture, And Fungus Resistance
- Easily Installs Over Connectors And Splices

**Put-Ups**

Nominal Size	Part #	Unshrunk Diameter /mm	Shrunk Diameter /mm	Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/16"	H2P0.06	1.6	0.8	1,000'	100'	2	0.20
1/4"	H2P0.25	6.4	3.2	250'	25'	2	0.60
5/16"	H2P0.31	8.0	4.0	250'	25'	2	0.70
3/8"	H2P0.38	9.5	4.8	250'	25'	2	0.80
1/2"	H2P0.50	12.7	6.4	250'	25'	2	1.10
5/8"	H2P0.63	15.9	7.9	250'	25'	2	1.16
3/4"	H2P0.75	19.1	9.5	250'	25'	2	1.90
1"	H2P1.00	25.4	12.7	250'	25'	2	3.00
1 1/2"	H2P1.50	38.1	19.1	100'	25'	2	5.30
2"	H2P2.00	50.8	25.4	100'	25'	2	8.02
2 1/2"	H2P2.50CL	63.5	31.8	100'	25'	Clear CL	9.45
3"	H2P3.00CL	76.2	38.1	50'	25'	Clear CL	18.00



**Cut Cleanly**  
Scissor

**Material**  
Polyvinyl Chloride

**Grade**  
H2P

**PVC 2:1 Heatshrink Tubing Shrinks To 1/2 its original diameter!**

PVC tubing is a Polyvinyl Chloride heatshrink tubing that shrinks to 1/2 its original diameter. During the shrinking operation, the tubing will encapsulate any device inside of it at the time and will assume the contour of that device.

Ultra clear PVC heatshrink tubing is ideal for application where complete transparency is required. Perfect for protecting exposed wires and cables on motorcycles and custom automobiles.

Resists gasoline, oil, and common chemicals; provides protection from abrasion and severe environments.

**Perfect tubing for application where complete transparency is required.**

**Colors Available:**  
Clear (CL) & Black (BK)



## **FLAMMABILITY**

Moisture Absorption % ASTM D-570 \_\_\_\_\_ 0.5  
Flammability Rating \_\_\_\_\_ Self-Extinguishing VW-1


## **CHEMICAL RESISTANCE**

Corrosion MIL-I-23053 \_\_\_\_\_ No Corrosion

**Shrinks**  
**212°F (100°C)**

**Maximum Continuous**  
*Mil-DTL-23053*  
**221°F (105°C)**

**Minimum Continuous**  
*Mil-DTL-23053*  
**-4°F (-20°C)**

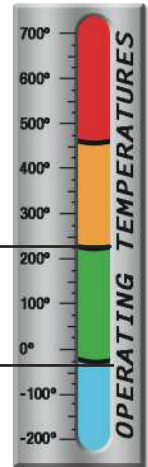

Measure the Shrinkflex® tubing to length and cut with a scissor. The thickness of your bundle, as well as the desired final appearance, will determine the length of the tubing you cut. Generally, a piece 1 1/2" - 2" long will accommodate almost any need. Single wires, or smaller bundles, require shorter pieces.



Slip the Shrinkflex® tubing over the bundle and position it so that both the sleeved and unsleeved portions are sufficiently covered. Notice the small pieces of tubing installed on single wires as part of a color coding system. If your project requires multiple operations, always work up from the smallest to the largest bundle.



Gently apply heat to Shrinkflex® tubing from a heat gun, hair dryer or torch with an appropriate attachment. Keep the heat source far enough away so that hot metal or direct flame does not come in contact with the tubing, wires or sleeving. Move the heat around the bundle to prevent damaging the sleeving and to ensure that all areas of the tubing have been shrunk. Once cooled, your installation is complete.

## **PHYSICAL PROPERTIES**

Recommended Cutting \_\_\_\_\_ Scissors  
Stock Colors \_\_\_\_\_ 2  
Tensile Strength PSI ASTM D-638 \_\_\_\_\_ 3,000  
Elongation % ASTM D-638 \_\_\_\_\_ 300  
Specific Gravity ASTM D-792 \_\_\_\_\_ 1.32  
Deformation % (250°F/121°C, 1 Hr.) \_\_\_\_\_ 50  
*MIL-I-23053*  
Heat Shock (250°F/121°C, 1 Hr.) \_\_\_\_\_ No Cracking  
*MIL-I-23053*  
Cold Bend (14°F/-10°C, 1 Hr.) \_\_\_\_\_ No Cracking  
*MIL-I-23053*  
Flexibility \_\_\_\_\_ No Cracking  
*MIL-I-23053*  
Secant Modulus PSI ASTM D-882 \_\_\_\_\_ 19,500  
Longitudinal Shrinkage (%) \_\_\_\_\_ 15  
Dielectric Strength (volts/mil) ASTM D-876 \_\_\_\_\_ 1,083  
Volume Resistivity (ohm-cm) ASTM D-876 \_\_\_\_\_ 21.5 x 10<sup>12</sup>