


## HC-KD/SG 24/ 4

Order No.: 1644025

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644025>Divisible cable feed-through for HC-B24-AMQ (1771927) panel  
mounting base; for four lines

Commercial data	
GTIN (EAN)	 4 017918 895884
sales group	D094
Pack	1 pcs.
Customs tariff	39269097
Catalog page information	Page 548 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
01/01/2003

[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data**

General data	
Design	B24
Material	PC; gray similar to RAL 7044
Inflammability class acc. to UL 94	V0
Ambient temperature (operation)	-40 °C ... 125 °C

Note	For HEAVYCON panel mounting base of type B24; for HC-KDT../HC-KDG-B
------	---

**Accessories**

Item	Designation	Description
------	-------------	-------------

**General**


1644164	HC-KDG-B	Filler plug to close the unused openings of the HC-KD/SG-... conduit
---------	----------	--

**Marking**

1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
5031171	SS-ZB WH	Marking labels, unprinted, 5-section, for snapping into devices and components with special marker groove, labeling with M PEN or CMS system, lettering field size: 20 x 8 mm, white, for SAB boxes

**Diagrams/Drawings**

Dimensioned drawing

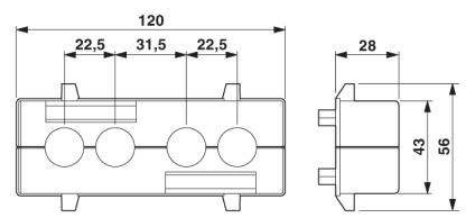

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;