

NOTES:


- ① MAT'L: COPPER
- PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FUNNEL FERRULE

STUD SIZES: ($\pm .005$)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING #E32244
 "CSA" LISTING #18689

WIRE SIZE: 22-18 AWG
 .25-1.5 MM²

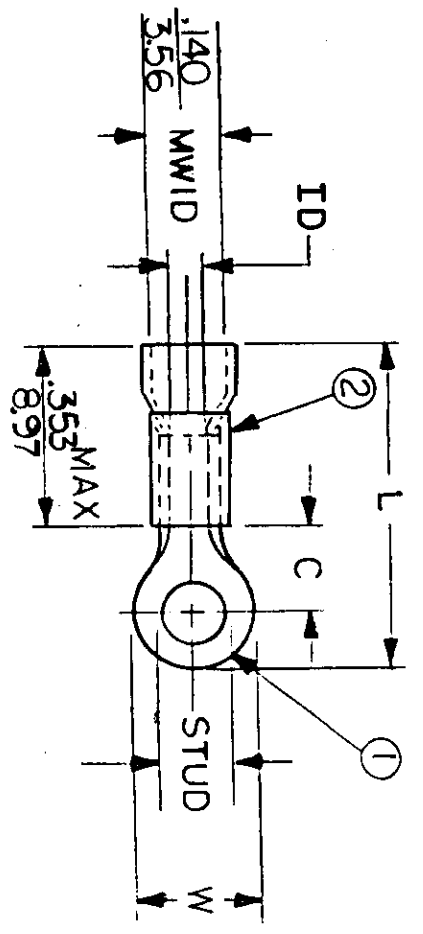

ALL DIMENSIONS = INCHES (MWID) DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:	DWG. NO.	CUSTOMER DWG
							DEC	ANG.							
AA-433	.273 6.93	.240 6.10	.764 19.41	.062 1.57	04, 06, 08, 10	.028 ⁺⁰⁰¹ .71 ⁰⁰⁰	±	±				11-26-84	RING TONGUE TERMINAL VIBRAKRIMP 400-SERIES	A	
AA-4111	.187 4.75	.173 4.39	.663 16.84	.054 1.37	02, 04	.031 ^{±001} .79	±	±				11-30-84			

