

HE. Oil level indicators

push-fit, polycarbonate



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15

MATERIAL

Transparent high mechanical resistance polycarbonate. Not suitable for use with oils with additives and solvents. Avoid contact with alcohol or detergents containing alcohol.

CONTRAST SCREEN

White lacquered aluminium with red level line.

PACKING RING

NBR synthetic rubber O-Ring.

MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

FEATURES AND APPLICATIONS

The push-fit assembly is guaranteed by optimised ribbings. Sealing is guaranteed by the O-ring. HE. oil level indicators push-fit are particularly suitable for assembly on reservoirs with limited pressure.

NOTE

For use with other fluids with special additives, please contact ELESAs Sales Department.


ASSEMBLY INSTRUCTIONS

Chamfer hole 1x45° and grease slightly the outside surface of the O-ring to make assembly easier.



ELESAs Original design

Conversion Table	
1 mm = 0.039 inch	
d1	
mm	inch
17	0.67
20	0.79
26	1.02
30	1.18
35	1.38
40	1.57
45	1.77

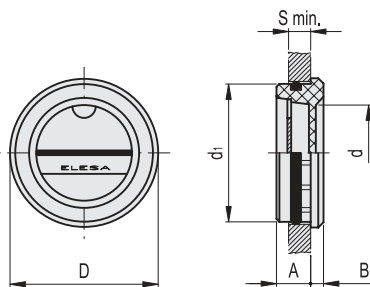

METRIC

Code	Description	d1	A	B	D	d	Smin	Mounting hole d1 H11	⚖
11401	HE.17	17	6.5	3	18	9	5	17	2
11501	HE.20	20	8	3	21	12	6	20	3
11601	HE.26	26	7.5	3.5	28	17	6	26	5
11701	HE.30	30	8	4	32	20	7	30	7
11801	HE.35	35	9	4	38	25	8	35	10
11901	HE.40	40	10	4.5	43	28	9	40	13
12001	HE.45	45	11	5.5	47	32	9	45	18