

PIN#	PIN NAME	I/O	PIN FUNCTION
1	GND		GROUND
2	D03	I/O	I1Z.0Z3
3	D04	I/O	I1Z.0Z3
4	D05	I/O	I1Z.0Z3
5	D06	I/O	I1Z.0Z3
6	D07	I/O	I1Z.0Z3
7	-CE1	I	I3U
8	A10	I	I1Z
9	-OE	I	I3U
10	A09	I	I1Z
11	A08	I	I1Z
12	A07	I	I1Z
13	VCC		POWER
14	A06	I	I1Z
15	A05	I	I1Z
16	A04	I	I1Z
17	A03	I	I1Z
18	A02	I	I1Z
19	A01	I	I1Z
20	A00	I	I1Z
21	D00	I/O	I1Z.0Z3
22	D01	I/O	I1Z.0Z3
23	D02	I/O	I1Z.0Z3
24	WP	O	OT3
25	-CD2	O	GROUND


PIN#	PIN NAME	I/O	PIN FUNCTION
26	-CD1	O	GROUND
27	D11'	I/O	I1Z.0Z3
28	D12'	I/O	I1Z.0Z3
29	D13'	I/O	I1Z.0Z3
30	D14'	I/O	I1Z.0Z3
31	D15'	I/O	I1Z.0Z3
32	-CE2'	I	I3U
33	-VS1	O	GROUND
34	-IORD	I	I3U
35	-IOWR	I	I3U
36	-WE	I	I3U
37	RDY/BSY	O	OT1
38	VCC		POWER
39	-CSFL	I	I2Z
40	-VS2	O	OPEN
41	RESET	I	I2Z
42	-WAIT	O	OT1
43	-INPACK	O	OT1
44	-REC	I	I3U
45	BVD2	I/O	I1U.0T1
46	BVD1	I/O	I1U.0T1
47	D08'	I/O	I1Z.0Z3
48	D09'	I/O	I1Z.0Z3
49	D10'	I/O	I1Z.0Z3
50	GND		GROUND

GENERAL TOLERANCE		FILE NO.	101-00205		PART. NO.		101-00205-***		DRAWN	LOP		MATERIAL	DATE		SCALE	NO. SCALE
X ± 0.50	X ± 5°	REV.	A		TITLE	CF Conn.-34		CHECKED	楊松 5/19/06			05/17/2006	UNIT	mm		
.X ± 0.38	.X ± 2°	SIZE	A4		SHEET	2 OF 2		APPROVED	Df 012		SM		Shouh Min Industry (ShenZhen) CO., LTD			
.XX ± 1°																





Pin Type	Interface Dim L	Pin No.
detect	3.50MM	25, 26
general	4.25MM	all other pins
power	5.00MM	1, 13, 38, 50

THE PART NUMBER:  
101-00205-\*\*

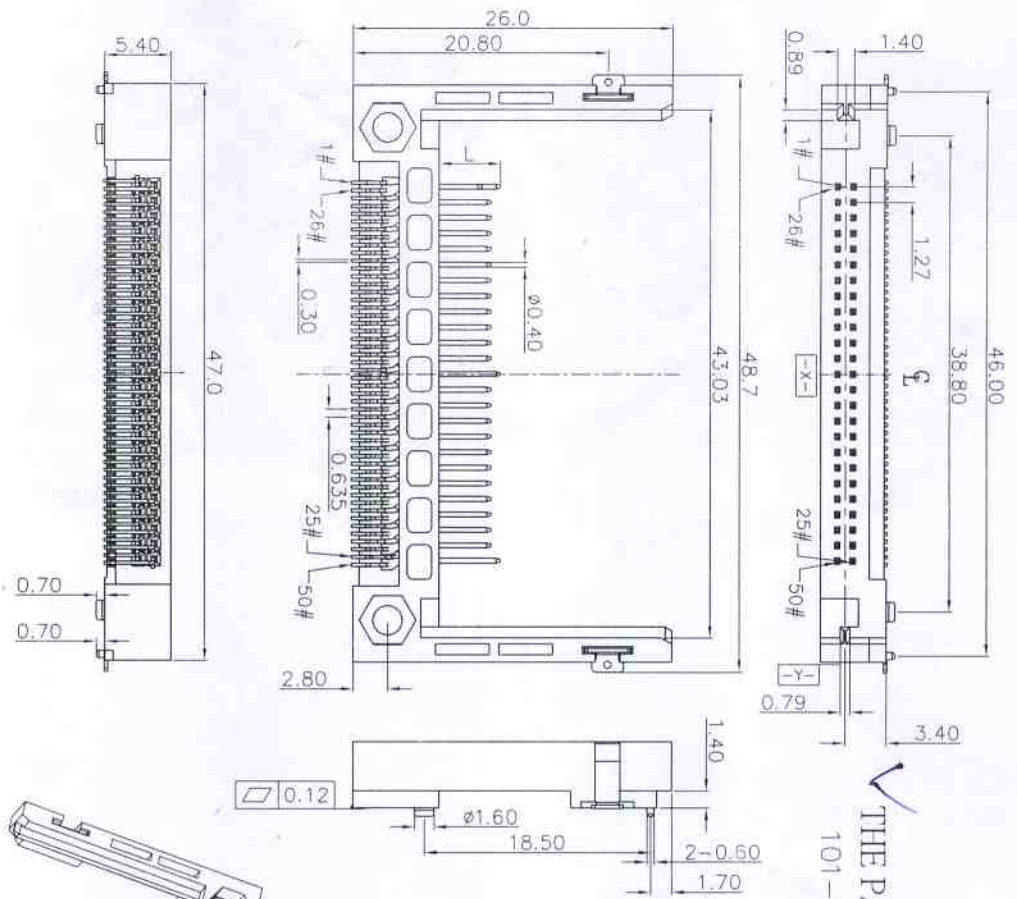

- 29:功能區鍍金1u", 鍍鍍鍍亮線路至少160u"
- 30:功能區鍍金3u", 鍍鍍鍍亮線路至少160u"
- 31:功能區鍍金5u", 鍍鍍鍍亮線路至少160u"
- 32:功能區鍍金10u", 鍍鍍鍍亮線路至少160u"
- 33:功能區鍍金15u", 鍍鍍鍍亮線路至少160u"
- 34:功能區鍍金30u", 鍍鍍鍍亮線路至少160u"
- 64:功能區鍍金1u", 鍍鍍鍍亮線路至少160u"
- 65:功能區鍍金3u", 鍍鍍鍍亮線路至少160u"
- 66:功能區鍍金5u", 鍍鍍鍍亮線路至少160u"
- 67:功能區鍍金10u", 鍍鍍鍍亮線路至少160u"
- 68:功能區鍍金15u", 鍍鍍鍍亮線路至少160u"
- 69:功能區鍍金30u", 鍍鍍鍍亮線路至少160u"

- Notes:
- All Dimensions are in Millimeters.
  - Operation voltage: 100 VAC max.
  - Current rating : 1 Amps max.
  - Contact resistance: 40m ohms max.
  - Insulation resistance: 1000M ohms min. 500 VDC
  - Dielectric withstanding voltage: 500 VAC/1minute
  - Operating Temperature: -20°C to +60°C
  - Storage Temperature: -40°C to +70°C
  - Material see table.

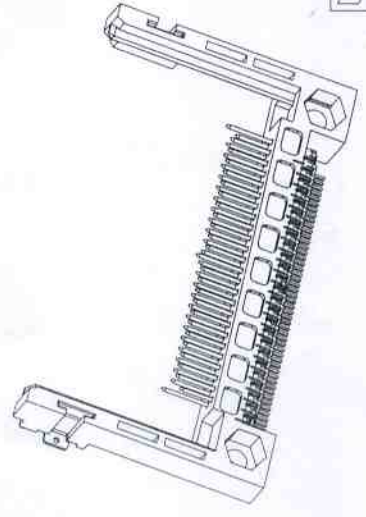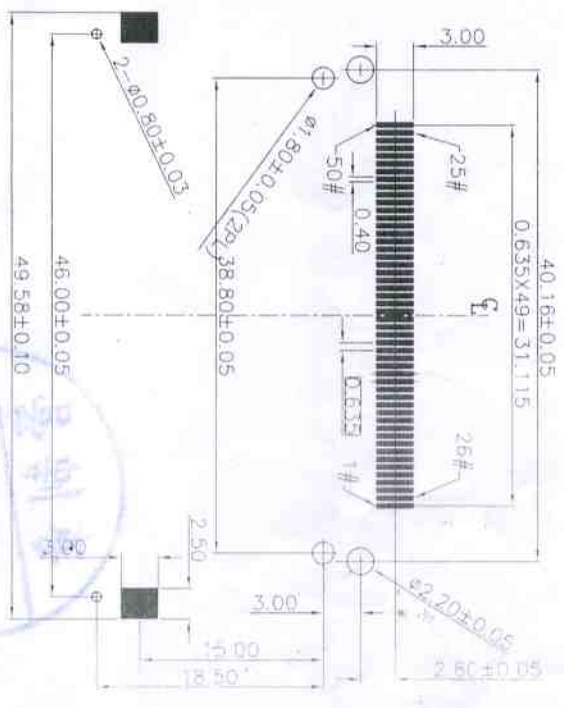

GENERAL TOLERANCE		FILE NO.	PART NO.		DRAWN	MATERIAL	
X:±0.50	X:±1.5*	101-00205	101-00205-**	LOP	楊 俞 鈺 鈺	DATE	SCALE
X±0.38	.X:±2*	REV.	CF Conn.-34	CHECKED	SM	05/17/2006	NO SCALE
.XX±0.25	.XX±1*	SIZE	(DRAWN BY: JIAHONG/REVISION: A)	APPROVED	Shouh Min Industry (ShenZhen)CO.,LTD	UNIT	mm
		A4	1 OF 2				