


Notes :

- * Insulation: Nylon 6T UL 94V-0, Color Nature
- * Contact : Phosphor Bronze
- * Fixed Tab : Brass with Matte Tin Plated
- * Recommended mating part:
Housing: CI44**S0000-L
Terminal: CI44T011PP0
- * For Lead-Free IR Reflow process

ORDERING CODE:

CI44 ** M * H ** -NH
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.:
- ② No. of circuits: 02 TO 15
- ③ Contacts type: M= SMT
- ④ Plating option:
1= Matte Tin Plated over Nickel
2= Gold flash plated over Nickel
- ⑤ Tail style: H= Right angle
- ⑥ Option: 00= Standard(Tube packing)
R0= Tape & Reel packing
- ⑦ Other option:
-NH=For Lead Free IR Processes and Halogen-Free

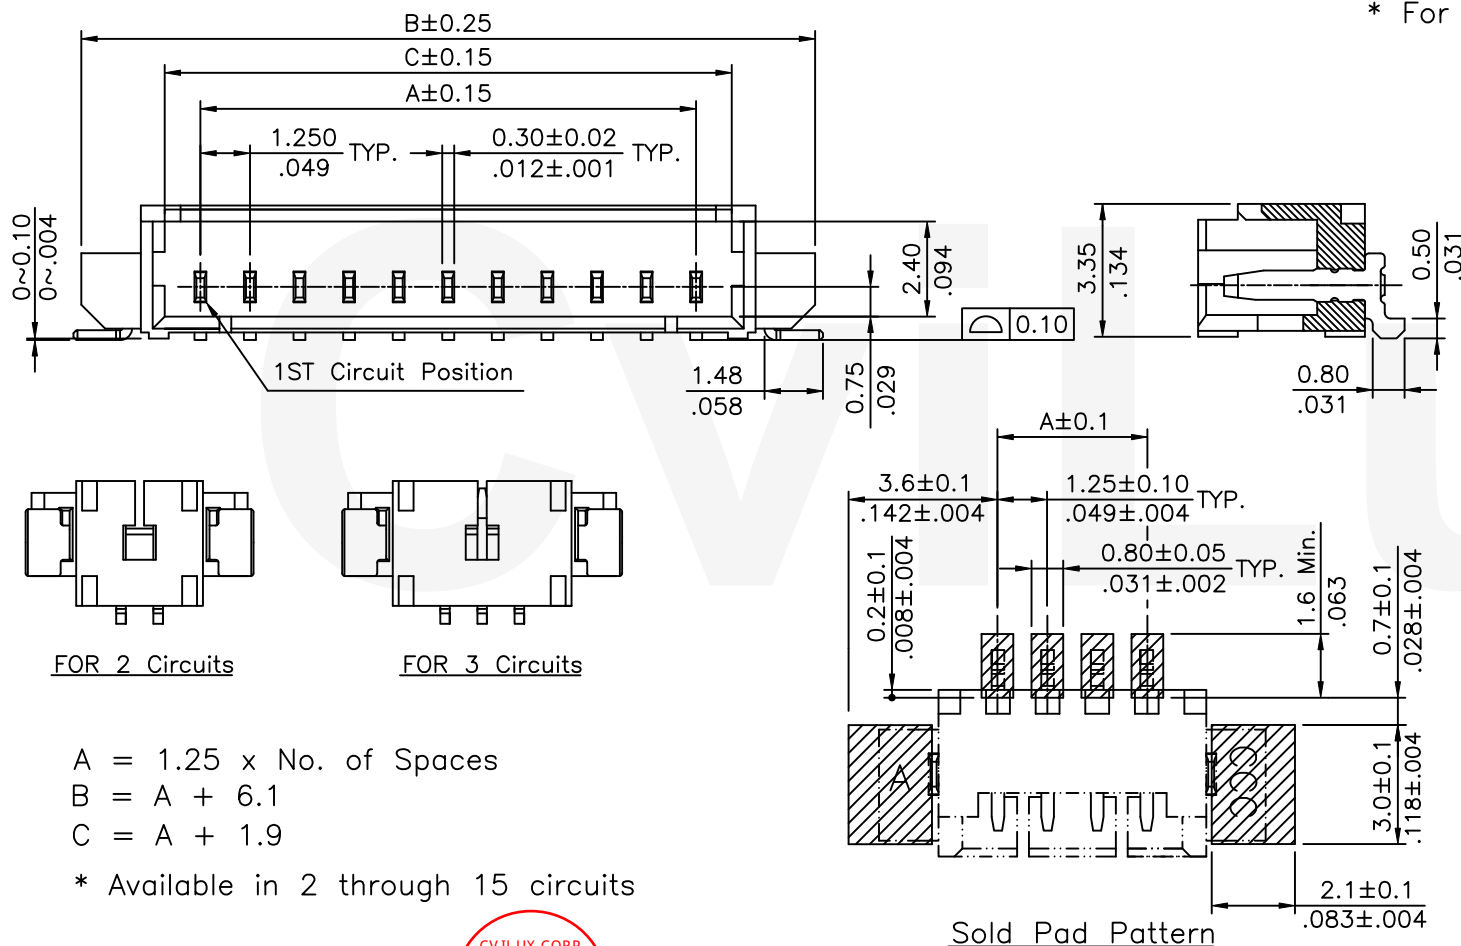

A = 1.25 x No. of Spaces
B = A + 6.1
C = A + 1.9

* Available in 2 through 15 circuits

Halogen-Free

Lead Free Process

RoHS compliant

CVILUX CORP
2019.08.22
ISSUED



瀚荃股份有限公司
CviLux Corporation

5	Sun	8/15-19'	ECNT119210	DATE	UNIT: mm / inch	TITLE: 1.25MM(.049") RIGHT ANGLE SMT TYPE HEADER	DRAWING NO. CI4447SF SCALE 5 / 1	PART NO. CI44**M*H**-NH SHEET 1 OF 2
4	Karen	12/09-14'	ECNT114252/ECRT114090	DRAWN BY: Sun	8/15-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
3	Ellie	9/24-14'	ECNT114210	ENGINEER: Sun	8/15-19'	.X ± 0.25/.010 X' ± 1'		
2	Enya	7/26-12'	ECN12176-0 / ECR12061-1	CHECKED BY: Eisley	8/16-19'	.XX ± 0.15/.006 X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	8/16-19'	.XXX ± 0.08/.003 XX' ±		

