


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16				
	C2	REVISED-ADDED -24, -25	09NOV07	JWD	JD
	C3	REVISED-ADDED -20	18AUG09	JS	JS

- 1. MAXIMUM INSERTION LOSS, FOR SC AND LC CONNECTORS, IS 0.50 dB PLUS CABLE ATTENUATION OF 1.50 dB/km @ 1300nm (SEE TABLE)
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

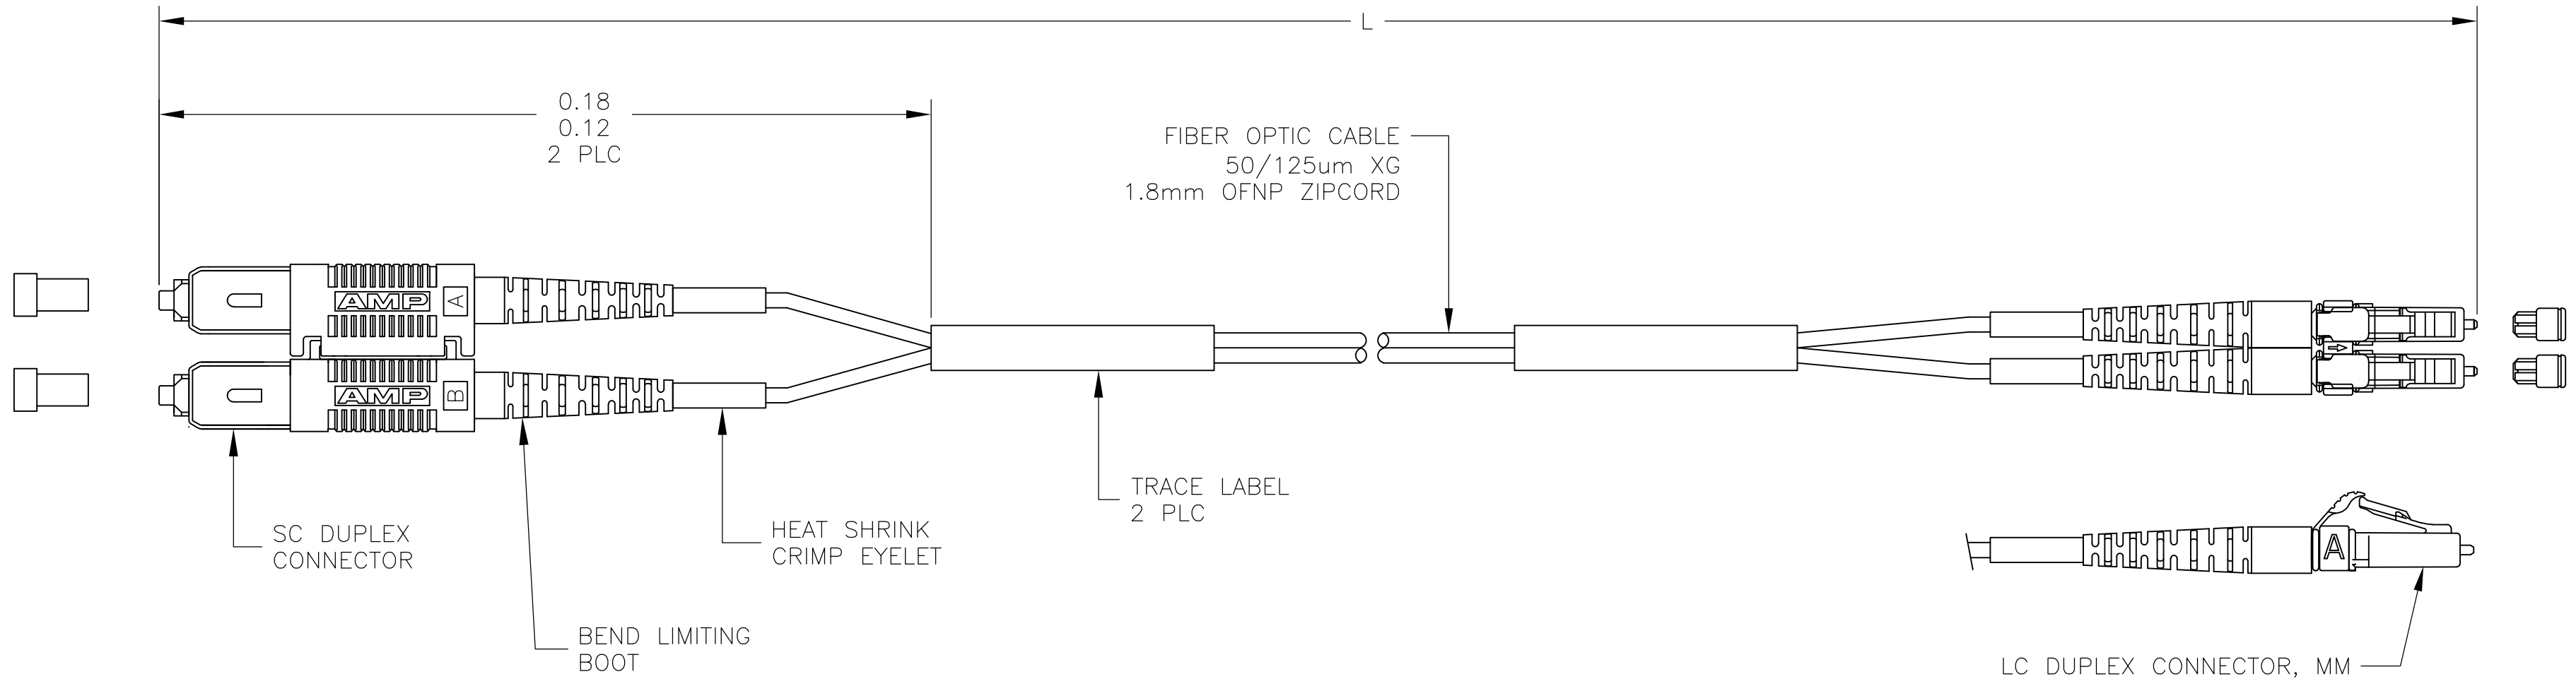

MAX IL(dB)	L METERS [INCHES]	PART NUMBER
0.53	25.00±0.30 [984.25±12.00]	2-6754384-5
0.53	24.00±0.30 [944.88±12.00]	2-6754384-4
0.53	20.00±0.20 [787.4±7.87]	2-6754384-0
0.52	10.00±0.15 [393.7±6.0]	1-6754384-0
0.51	8.00±0.15 [315.0±6.0]	6754384-8
0.50	5.00±0.08 [196.9±3.0]	6754384-5
0.50	4.00±0.08 [157.5±3.0]	6754384-4
0.50	3.00±0.05 [118.11±2.00]	6754384-3
0.50	2.00±0.05 [78.74±1.97]	6754384-2
0.50	1.00±0.05 [39.40±1.97]	6754384-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 24SEP05	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 24SEP05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		APVD J.DUNCAN 24SEP05	CABLE ASSEMBLY, FIBER OPTIC, 50/125um XG, 1.8mm OFNP ZIPCORD SC DUPLEX TO LC DUPLEX	
MATERIAL		PRODUCT SPEC	SIZE A2	CAGE CODE 00779
		APPLICATION SPEC	DRAWING NO C-6754384	RESTRICTED TO
		WEIGHT	CUSTOMER DRAWING	
		SCALE NTS	SHEET 1 OF 1	REV C3

6754384