

_						
	Date	SYM	REVISION RECORD	AUTH	DR.	CK.
	05/12/17	А	REDRAWN IN AUTOCAD DIM. 16.56 WAS 17.2 DIM. 108.97 WAS 109.0	T.B.	B.S.	

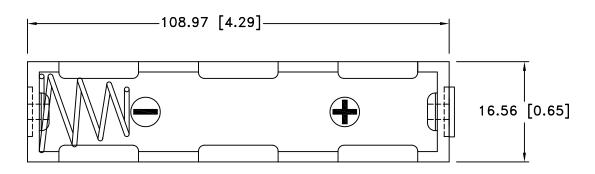

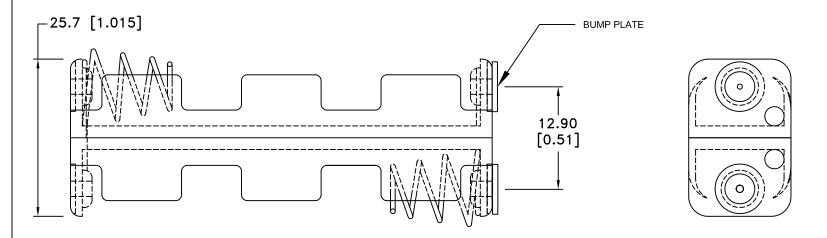

## NOTES:

Plastic material - Polypropylene

Flammability Rating -UL94-HB, UL File NO. E216959

Temperature Range: -10°C to +100°C Springs - Nickel Plated Spring Steel

Rivets - Brass, Nickel Plated Bump plates: Brass, Nickel Plated

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER

EIA-540J000

**ROHS 2 COMPLIANT** 

Tolerance	Memory Protection Devices, Inc							
(Except as noted)	200 Broad Hollow Road, Farmingdale, New York 11735							
decimal			Scale	Drawn By B.S.				
±.5 (.020)				Approved By T.B.				
Fractional	Title							
± .8 (.030)	FOUR "AA" CELL HOLDER WITH BUMP PLATES							
Angular	Date	Drawing Number						
± 3°	05/12/17	BH14AAB						