




# Model CC Series

## Advanced PLL LVPECL or LVDS Clock

### Features

- Ceramic Surface Mount Package
- Very Low Phase Jitter Performance, 150fs Typical
- Quartz Crystal Based Design
- Frequency Range to 2.1GHz \*
- +1.8V, +2.5V or +3.3V Operation
- Output Enable Standard
- Tape and Reel Packaging, EIA-481

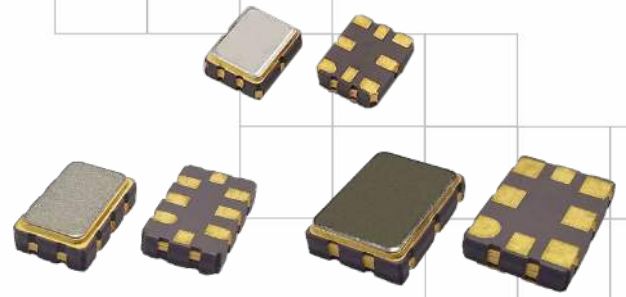

Part Dimensions:  
 3.2 × 2.5 × 1.2mm • 26.64mg  
 5.0 × 3.2 × 1.5mm • 61.8mg  
 7.0 × 5.0 × 1.9mm • 172.74mg

### Standard Frequencies

\* See Page 12 for common frequencies.  
 Check with factory for availability of frequencies not listed.

### Applications

- SerDes
- Storage Area Networking
- Broadband Access
- SONET/SDH/DWDM
- PON
- Ethernet/Gbe/SyncE
- Fiber Channel
- Medical Electronics
- Test and Measurement

### Description

CTS Model CC Series is a low cost, high performance clock oscillator supporting differential LVPECL or LVDS outputs. Employing the latest IC technology, CC Series has excellent stability and low jitter/phase noise performance.

### Ordering Information

Model	Package Size	Output Type	Frequency Code	Frequency Stability	Temperature Range	Supply Voltage	Packaging																								
CC	32	P	XXXX	3	I	L	R																								
	<table border="1"> <thead> <tr> <th>Code</th> <th>Dimensions</th> </tr> </thead> <tbody> <tr> <td>32</td> <td>3.2mmx2.5mm</td> </tr> <tr> <td>50</td> <td>5.0mmx3.2mm</td> </tr> <tr> <td>70</td> <td>7.0mmx5.0mm</td> </tr> </tbody> </table>	Code	Dimensions	32	3.2mmx2.5mm	50	5.0mmx3.2mm	70	7.0mmx5.0mm		<table border="1"> <thead> <tr> <th>Code</th> <th>Frequency</th> </tr> </thead> <tbody> <tr> <td colspan="2">Product Frequency Code <sup>1</sup></td> </tr> </tbody> </table>	Code	Frequency	Product Frequency Code <sup>1</sup>			<table border="1"> <thead> <tr> <th>Code</th> <th>Temp. Range</th> </tr> </thead> <tbody> <tr> <td>C</td> <td>-20°C to +70°C</td> </tr> <tr> <td>I</td> <td>-40°C to +85°C</td> </tr> </tbody> </table>	Code	Temp. Range	C	-20°C to +70°C	I	-40°C to +85°C		<table border="1"> <thead> <tr> <th>Code</th> <th>Packing <sup>3</sup></th> </tr> </thead> <tbody> <tr> <td>T</td> <td>1k pcs./reel</td> </tr> <tr> <td>R</td> <td>3k pcs./reel</td> </tr> </tbody> </table>	Code	Packing <sup>3</sup>	T	1k pcs./reel	R	3k pcs./reel
Code	Dimensions																														
32	3.2mmx2.5mm																														
50	5.0mmx3.2mm																														
70	7.0mmx5.0mm																														
Code	Frequency																														
Product Frequency Code <sup>1</sup>																															
Code	Temp. Range																														
C	-20°C to +70°C																														
I	-40°C to +85°C																														
Code	Packing <sup>3</sup>																														
T	1k pcs./reel																														
R	3k pcs./reel																														
		<table border="1"> <thead> <tr> <th>Code</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>LVPECL</td> </tr> <tr> <td>L</td> <td>LVDS</td> </tr> </tbody> </table>	Code	Output	P	LVPECL	L	LVDS		<table border="1"> <thead> <tr> <th>Code</th> <th>Stability</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>±25ppm</td> </tr> <tr> <td>3</td> <td>±50ppm</td> </tr> </tbody> </table>	Code	Stability	5	±25ppm	3	±50ppm		<table border="1"> <thead> <tr> <th>Code</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>M</td> <td>+1.8Vdc <sup>2</sup></td> </tr> <tr> <td>N</td> <td>+2.5Vdc</td> </tr> <tr> <td>L</td> <td>+3.3Vdc</td> </tr> </tbody> </table>	Code	Voltage	M	+1.8Vdc <sup>2</sup>	N	+2.5Vdc	L	+3.3Vdc					
Code	Output																														
P	LVPECL																														
L	LVDS																														
Code	Stability																														
5	±25ppm																														
3	±50ppm																														
Code	Voltage																														
M	+1.8Vdc <sup>2</sup>																														
N	+2.5Vdc																														
L	+3.3Vdc																														

Notes:

- 1] Refer to document 016-1454-0, Frequency Code Tables. [4-digits for frequencies 100MHz or greater.]
- 2] LVDS output only.
- 3] Code T for package codes 50 and 70. Code R for package code 32 only.

**Not all performance combinations and frequencies may be available.  
 Contact your local CTS Representative or CTS Customer Service for availability.**

This product is specified for use only in standard commercial applications. Supplier disclaims all express and implied warranties and liability in connection with any use of this product in any non-commercial applications or in any application that may expose the product to conditions that are outside of the tolerances provided in its specification.



## Electrical Specifications

### Operating Conditions

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Maximum Supply Voltage	$V_{CC}$	-	-0.5	-	3.8	V
Supply Voltage	$V_{CC}$	$\pm 5\%$ , LVDS only	1.71	1.8	1.89	V
		$\pm 10\%$	2.25	2.5	2.75	
			2.97	3.3	3.63	
Supply Current						
LVPECL	$I_{CC}$	Maximum Load	-	100	120	mA
LVDS		Maximum Current Value @ +3.3V	-	75	90	
Operating Temperature	$T_A$	-	-20 -40	+25	+70 +85	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	-	-55	-	+125	$^{\circ}\text{C}$

### Frequency Stability

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Frequency Range	$f_O$	-		100 - 2,100		MHz
Frequency Stability [Note 1]	$\Delta f/f_O$	-		25 or 50		$\pm\text{ppm}$
Aging	$\Delta f/f_{25}$	First Year @ +25 $^{\circ}\text{C}$ , nominal $V_{CC}$	-3	-	3	ppm

1.] Inclusive of initial tolerance at time of shipment, changes in supply voltage, load, temperature and 1st year aging.

### Output Parameters

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Output Type	-	-		LVPECL		-
Output Load	$R_L$	Terminated to $V_{CC} - 2.0\text{V}$	-	50	-	Ohms
Output Voltage Levels	$V_{OH}$	PECL Load	$V_{CC} - 1.165$	-	$V_{CC} - 0.80$	V
	$V_{OL}$		$V_{CC} - 2.0$	-	$V_{CC} - 1.55$	
Output Duty Cycle	SYM	@ $V_{CC} - 1.3\text{V}$	45	-	55	%
Differential Output Voltage	$V_{OD}$	$R_L = 50\text{ Ohms}$	595	-	930	mV
Rise and Fall Time	$T_R, T_F$	@ 20%/80% Levels, $R_L = 50\text{ Ohms}$	-	-	0.40	ns
Output Type	-	-		LVDS		-
Output Load	$R_L$	Between Outputs	-	100	-	Ohms
Output Voltage Levels	$V_{OH}$	LVDS Load	-	1.40	1.60	V
	$V_{OL}$		0.90	1.10	-	
Output Duty Cycle	SYM	@ 1.25V	45	-	55	%
Differential Output Voltage	$V_{OD}$	$R_L = 100\text{ Ohms}$	250	-	450	mV
Offset Voltage	$V_{OS}$	LVDS Load	1.20	1.25	1.30	V
Rise and Fall Time	$T_R, T_F$	@ 20%/80% Levels, $R_L = 100\text{ Ohms}$	-	-	0.40	ns

## Electrical Specifications

### Output Parameters

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Start Up Time	$T_S$	Application of $V_{CC}$	-	5	10	ms
<b>Enable Function [Tri-State]</b>						
Enable Input Voltage	$V_{IH}$	Pin 2 Logic '1', Output Enabled	$0.8V_{CC}$	-	-	V
Disable Input Voltage	$V_{IL}$	Pin 2 Logic '0', Output Disabled	-	-	$0.2V_{CC}$	V
Disable Current	$I_{IL}$	Pin 2 Logic '0', Output Disabled, LVPECL	-	99	-	mA
		Pin 2 Logic '0', Output Disabled, LVDS	-	74	-	
Disable Time	$T_{PLZ}$	Pin 2 Logic '0', Output Disabled	-	-	10	$\mu$ s
Enable Time	$T_{PLZ}$	Pin 2 Logic '1', Output Enabled	-	-	2.5	ms
Phase Jitter, RMS	$t_{jrms}$	Bandwidth 12 kHz - 20 MHz	-	150	300	fs


### Enable Truth Table

LVPECL or LVDS

Pin 1	Pin 4 & Pin 5
Logic '1'	Output Enabled
Open	Output Enabled
Logic '0'	Output Disabled, High Impedance


### Output Waveform

LVPECL or LVDS

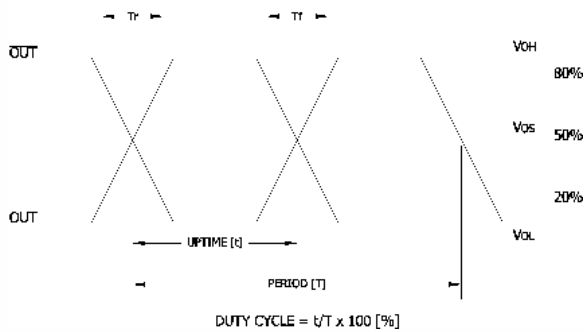


## Electrical Specifications


Test Circuit  
LVPECL

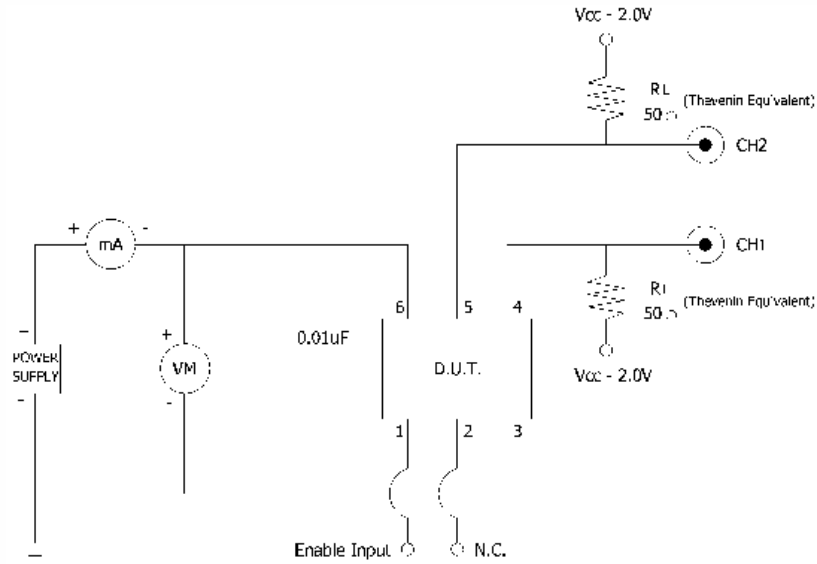

LVDS

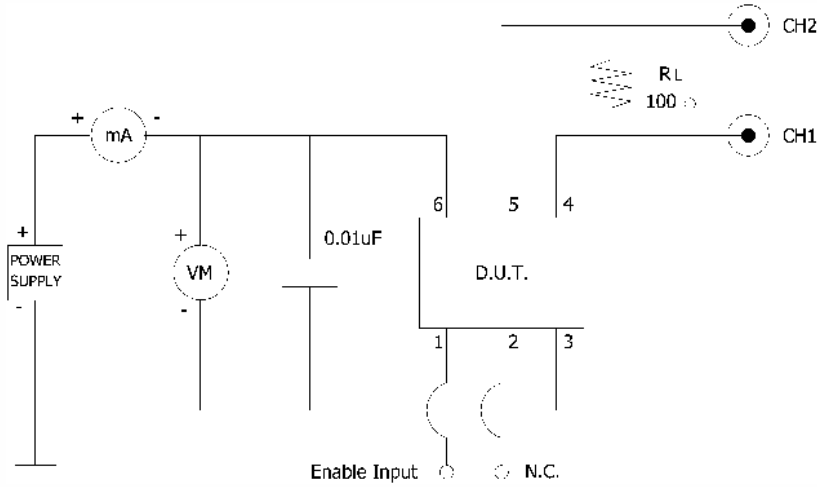

LVDS @ +1.8V

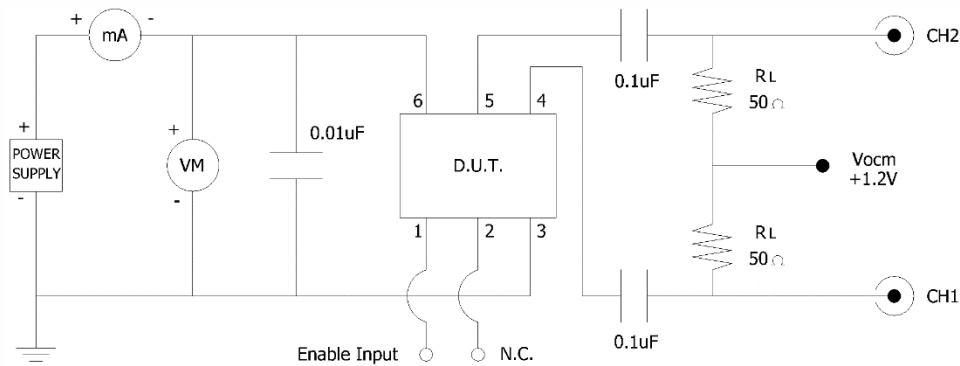



### Electrical Specifications


#### Performance Data

##### Phase Noise [typical]


100MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$




106.25MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

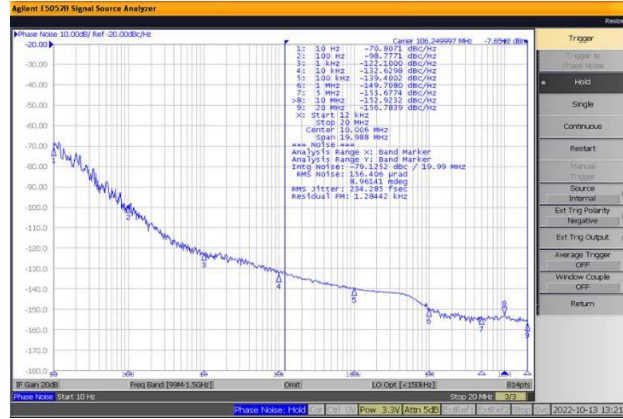


122.88MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

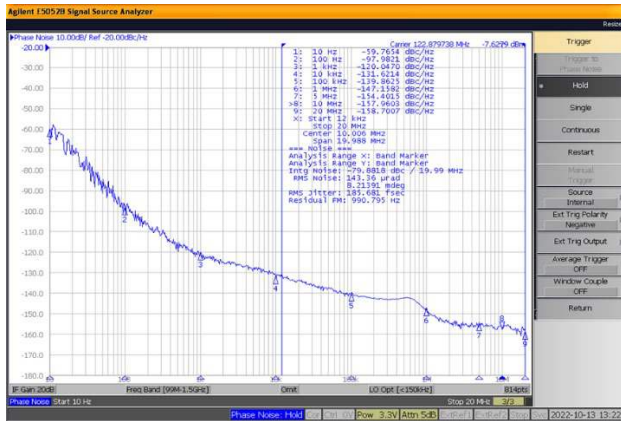


125MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

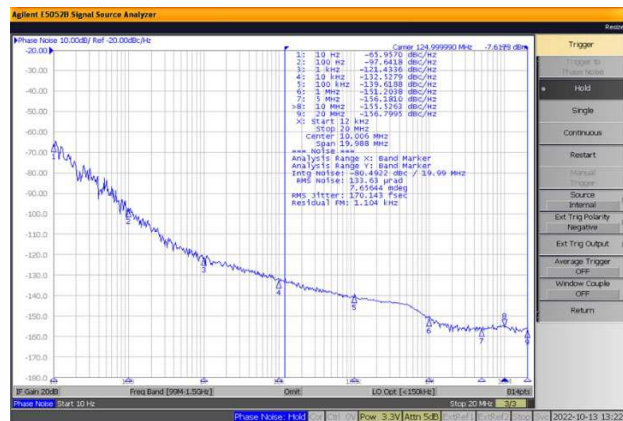

150MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

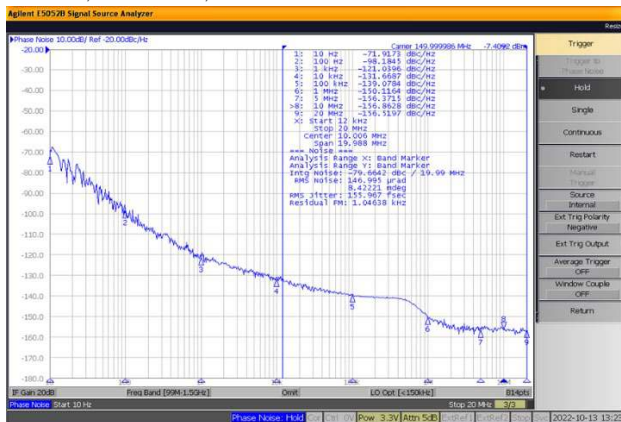

156.25MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

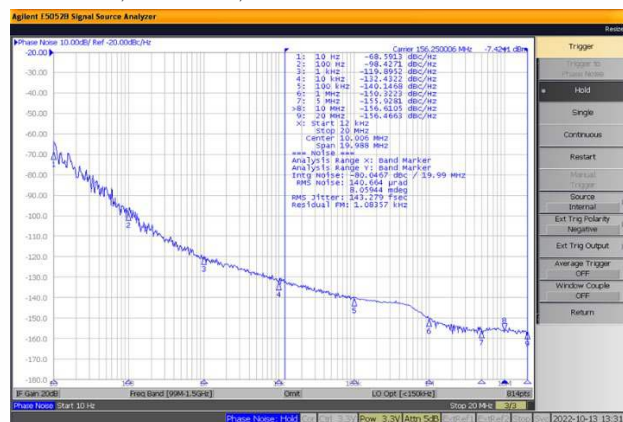






### Electrical Specifications


#### Performance Data

##### Phase Noise [typical]


200MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

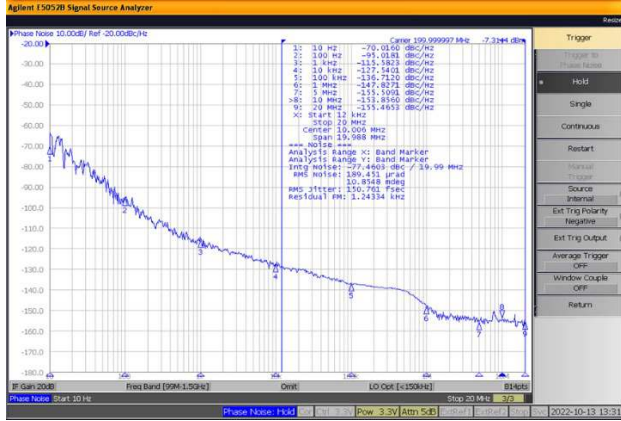


212.5MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

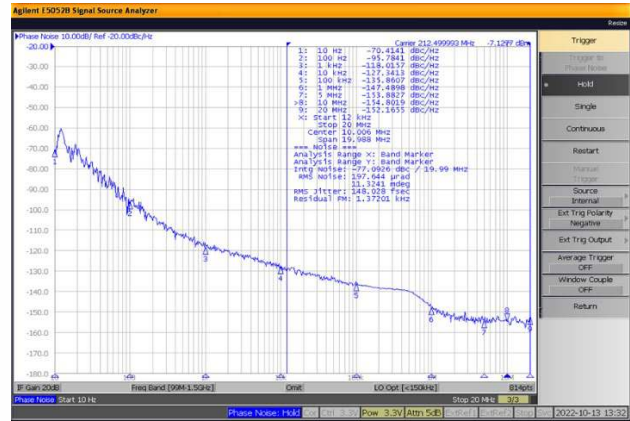


250MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

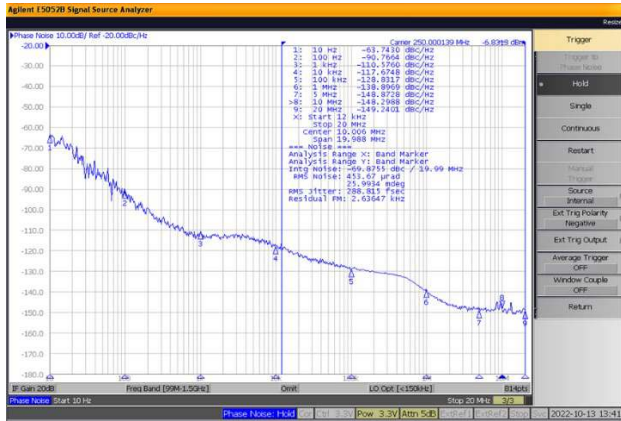


312.5MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

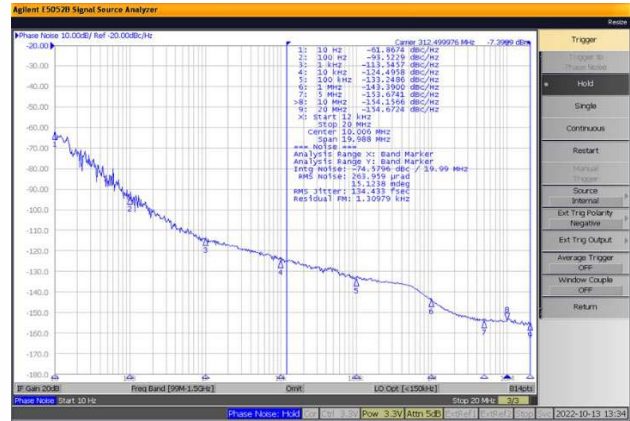

622.08MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

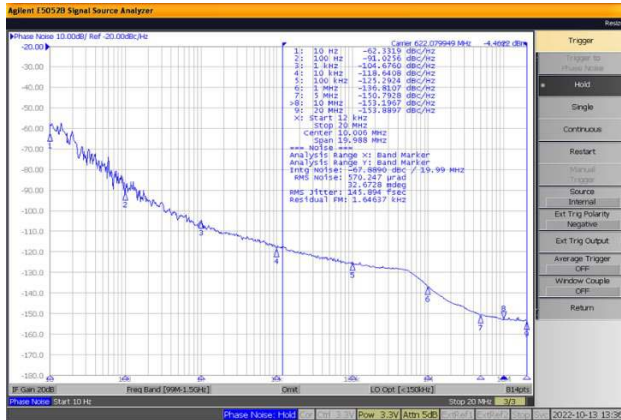

644.53125MHz,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

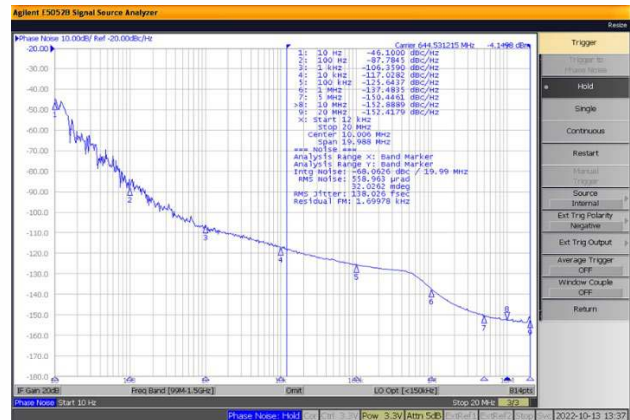



## Electrical Specifications

### Performance Data

#### Phase Noise Tabulated

Typical,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>100.0000MHz</b>				
Phase Noise	-	Single Side Band		
		@ 10Hz	-57.8497	
		@ 100Hz	-95.8361	
		@ 1kHz	-119.8327	
		@ 10kHz	-134.4482	dBc/Hz
		@ 100kHz	-141.1822	
		@ 1MHz	-150.7155	
		@ 5MHz	-154.4414	
		@ 10MHz	-155.2105	
@ 20MHz	-153.8281			
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	245.9490	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>122.8800MHz</b>				
Phase Noise	-	Single Side Band		
		@ 10Hz	-59.7654	
		@ 100Hz	-97.9821	
		@ 1kHz	-120.0470	
		@ 10kHz	-131.6214	dBc/Hz
		@ 100kHz	-139.8625	
		@ 1MHz	-147.1582	
		@ 5MHz	-154.4015	
		@ 10MHz	-157.9603	
@ 20MHz	-158.7007			
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	185.6810	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>150.0000MHz</b>				
Phase Noise	-	Single Side Band		
		@ 10Hz	-71.9173	
		@ 100Hz	-98.1845	
		@ 1kHz	-121.0396	
		@ 10kHz	-131.6687	dBc/Hz
		@ 100kHz	-139.0784	
		@ 1MHz	-150.1164	
		@ 5MHz	-156.3715	
		@ 10MHz	-156.8628	
@ 20MHz	-156.5197			
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	155.9670	fs

Typical,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>106.250MHz</b>				
Phase Noise	-	Single Side Band		
		@ 10Hz	-70.8071	
		@ 100Hz	-98.7771	
		@ 1kHz	-122.1000	
		@ 10kHz	-132.6298	dBc/Hz
		@ 100kHz	-139.4002	
		@ 1MHz	-149.7080	
		@ 5MHz	-153.6774	
		@ 10MHz	-152.9232	
@ 20MHz	-156.7839			
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	234.2850	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>125.0000MHz</b>				
Phase Noise	-	Single Side Band		
		@ 10Hz	-65.9570	
		@ 100Hz	-97.6418	
		@ 1kHz	-121.4336	
		@ 10kHz	-132.5279	dBc/Hz
		@ 100kHz	-139.6188	
		@ 1MHz	-151.2038	
		@ 5MHz	-156.1810	
		@ 10MHz	-155.5263	
@ 20MHz	-156.7995			
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	170.1430	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>156.2500MHz</b>				
Phase Noise	-	Single Side Band		
		@ 10Hz	-68.5913	
		@ 100Hz	-98.4271	
		@ 1kHz	-119.8952	
		@ 10kHz	-132.4322	dBc/Hz
		@ 100kHz	-140.1468	
		@ 1MHz	-150.3223	
		@ 5MHz	-155.9281	
		@ 10MHz	-156.6105	
@ 20MHz	-156.4663			
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	143.2790	fs



## Electrical Specifications

### Performance Data

#### Phase Noise Tabulated

Typical,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>200.0000MHz</b>				
Phase Noise		Single Side Band		
		@ 10Hz	-70.0160	
		@ 100Hz	-95.0181	
		@ 1kHz	-115.5823	
		@ 10kHz	-127.5401	dBc/Hz
		@ 100kHz	-136.7120	
		@ 1MHz	-147.8271	
		@ 5MHz	-155.5091	
		@ 10MHz	-153.8560	
	@ 20MHz	-155.4653		
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	150.7610	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>250.0000MHz</b>				
Phase Noise		Single Side Band		
		@ 10Hz	-63.7430	
		@ 100Hz	-90.7664	
		@ 1kHz	-110.5760	
		@ 10kHz	-117.6748	dBc/Hz
		@ 100kHz	-128.8317	
		@ 1MHz	-138.8969	
		@ 5MHz	-148.8728	
		@ 10MHz	-148.2933	
	@ 20MHz	-149.2401		
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	288.8150	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>622.0800MHz</b>				
Phase Noise		Single Side Band		
		@ 10Hz	-62.3319	
		@ 100Hz	-91.0256	
		@ 1kHz	-104.6760	
		@ 10kHz	-118.6408	dBc/Hz
		@ 100kHz	-125.2924	
		@ 1MHz	-136.8107	
		@ 5MHz	-150.7928	
		@ 10MHz	-153.1967	
	@ 20MHz	-153.8897		
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	145.8940	fs

Typical,  $V_{CC} = +3.3V$ ,  $T_A = +25^\circ C$

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>212.5000MHz</b>				
Phase Noise		Single Side Band		
		@ 10Hz	-70.4141	
		@ 100Hz	-95.7841	
		@ 1kHz	-118.0157	
		@ 10kHz	-127.3413	dBc/Hz
		@ 100kHz	-135.8607	
		@ 1MHz	-147.4898	
		@ 5MHz	-153.8827	
		@ 10MHz	-154.8019	
	@ 20MHz	-152.1655		
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	148.0280	fs

PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>312.5000MHz</b>				
Phase Noise		Single Side Band		
		@ 10Hz	-61.8674	
		@ 100Hz	-93.5229	
		@ 1kHz	-113.5457	
		@ 10kHz	-124.4958	dBc/Hz
		@ 100kHz	-133.2486	
		@ 1MHz	-143.3900	
		@ 5MHz	-153.6741	
		@ 10MHz	-154.1566	
	@ 20MHz	-154.6724		
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	134.4330	fs


PARAMETER	SYMBOL	CONDITIONS	TYP	UNIT
<b>644.53125MHz</b>				
Phase Noise		Single Side Band		
		@ 10Hz	-46.1000	
		@ 100Hz	-87.7845	
		@ 1kHz	-106.3590	
		@ 10kHz	-117.0282	dBc/Hz
		@ 100kHz	-125.6437	
		@ 1MHz	-137.4835	
		@ 5MHz	-150.4461	
		@ 10MHz	-152.8889	
	@ 20MHz	-152.4179		
Phase Jitter, RMS	tjrms	Integration Bandwidth 12kHz - 20MHz	138.0260	fs




## Mechanical Specifications

### Package Drawing


#### CC32

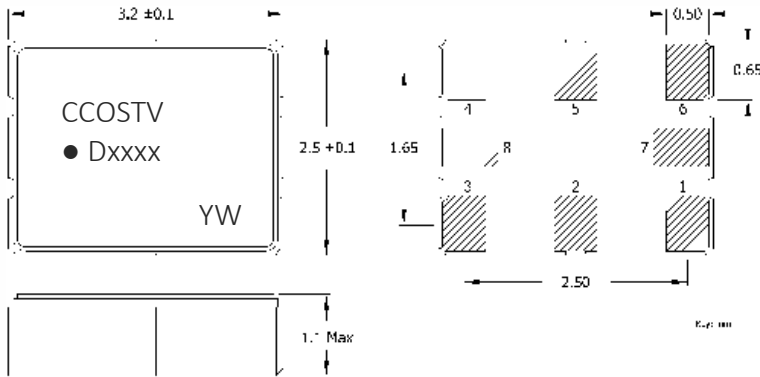

#### CC50

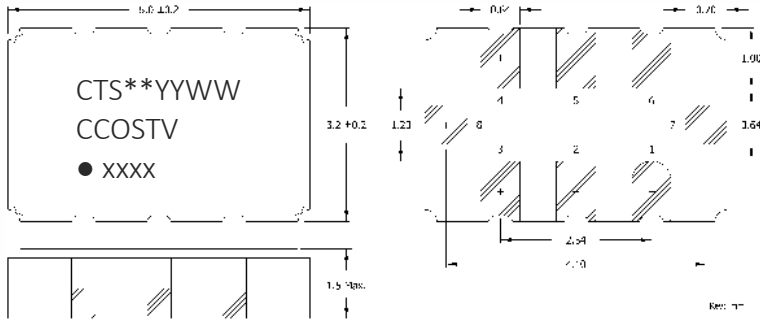

#### CC70

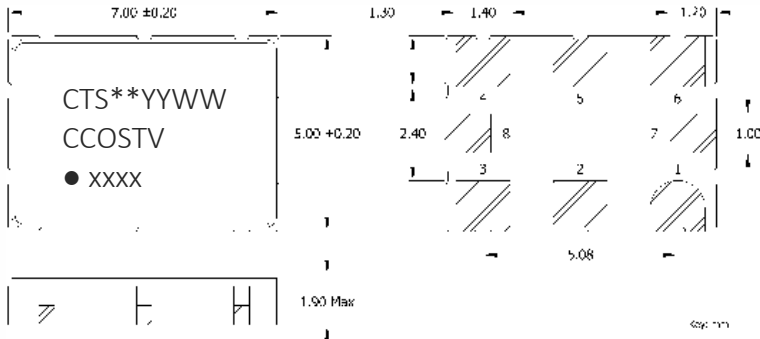

### Marking Information

#### CC32

1. CC – Model series.
2. O – Output Type; P = LVPECL, L = LVDS.
3. ST – Frequency Stability/Temperature Code. [Refer to Ordering Information]
4. V – Voltage Code; M = 1.8V, N = 2.5V, L = 3.3V.
5. D – Date Code. See Table I for codes.
6. xxxx – Frequency Code.  
3-digits, frequencies below 100MHz  
4-digits, frequencies 100MHz or greater  
[See document 016-1454-0, Frequency Code Tables.]
7. YW [Optional] – CTS Internal Marking for Traceability.

#### CC50 and CC70

1. \*\* - Manufacturing Site Code.
2. YYWW – Date Code; YY – year, WW – week.
3. CC – Model series.
4. O – Output Type; P = LVPECL, L = LVDS.
5. ST – Frequency Stability/Temperature Code. [Refer to Ordering Information]
6. V – Voltage Code; M = 1.8V, N = 2.5V, L = 3.3V.
7. xxxx – Frequency Code.  
3-digits, frequencies below 100MHz  
4-digits, frequencies 100MHz or greater  
[See document 016-1454-0, Frequency Code Tables.]


### Notes

1. JEDEC termination code (e4). Barrier-plating is nickel [Ni] with gold [Au] flash plate.
2. Reflow conditions per JEDEC J-STD-020; +260°C maximum, 20 seconds.
3. MSL = 1.


## Mechanical Specifications

### Recommended Pad Layout


#### CC32

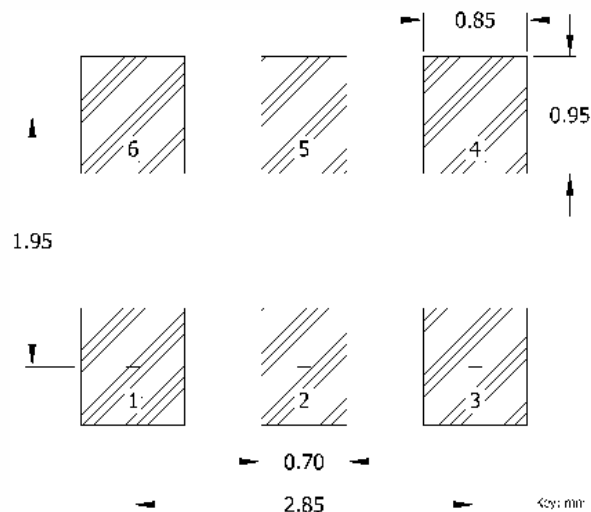

#### CC50

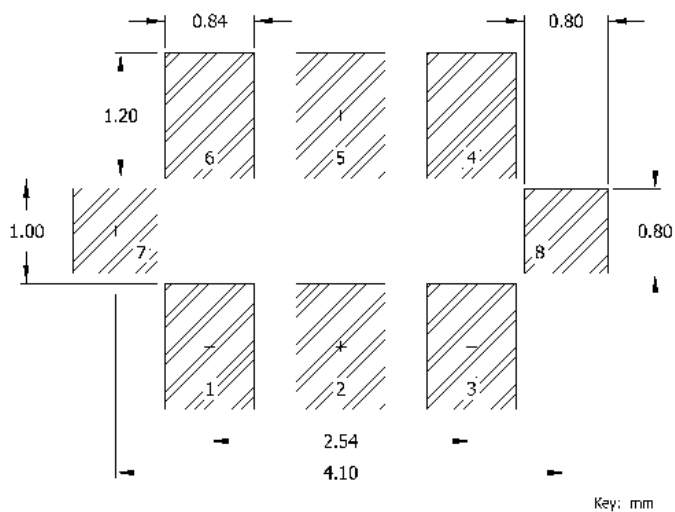

#### CC70

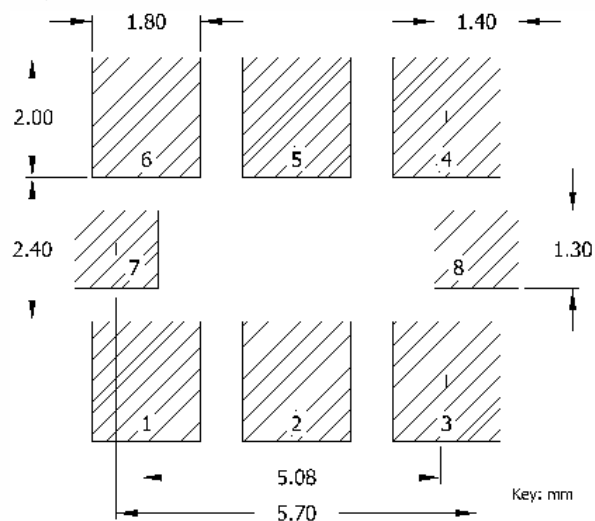


## Pin Assignments

### LVPECL or LVDS

Pin	Symbol	Function
1	EOH	Enable
2	N.C.	No Connect
3	GND	Circuit & Package Ground
4	Output	RF Output
5	Output	Complimentary RF Output
6	V <sub>CC</sub>	Supply Voltage
7	N.C.	Do Not Connect
8	N.C.	Do Not Connect

### VOLTAGE SUPPLY - BYPASS CAPACITOR

Proper filtering of high frequency noise riding on the voltage supply line is critical to eliminating the injecting of that noise into the oscillator and throughout the system. It is recommended that a 0.1 $\mu$ F [100nF] capacitor be inserted from the V<sub>CC</sub> pin to circuit ground. The bypass capacitor placement should be as close to the V<sub>CC</sub> pad as possible with a short trace routing to circuit ground.

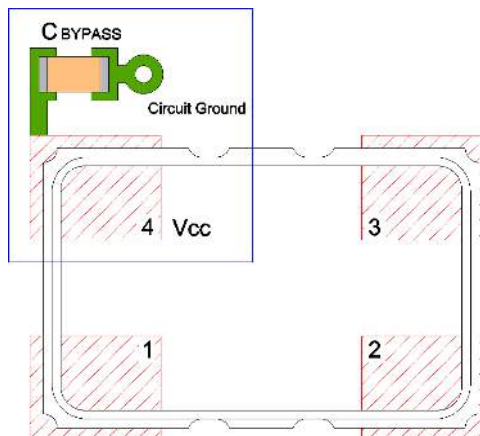


## Mechanical Specifications

Table I - Date Code, Beginning year 2021


MONTH					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
YEAR																
2021	2025	2029	2033	2037	A	B	C	D	E	F	G	H	J	K	L	M
2022	2026	2030	2034	2038	N	P	Q	R	S	T	U	V	W	X	Y	Z
2023	2027	2031	2035	2039	a	b	c	d	e	f	g	h	j	k	l	m
2024	2028	2032	2036	2040	n	p	q	r	s	t	u	v	w	x	y	z

## Packaging - Tape and Reel

### Tape Drawing

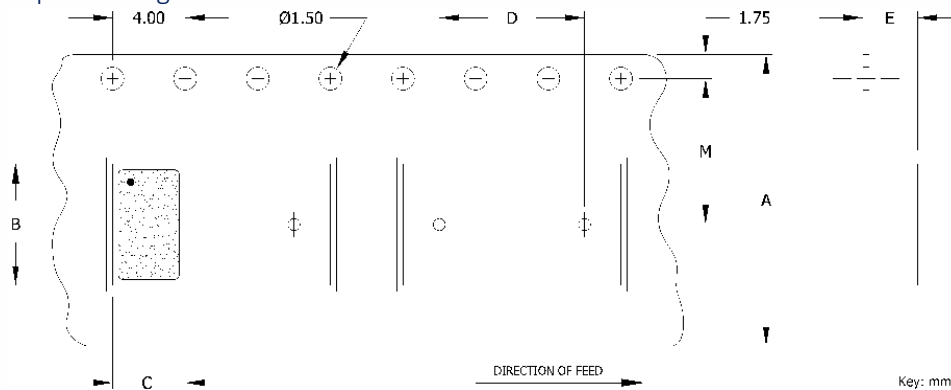

### Reel Drawing

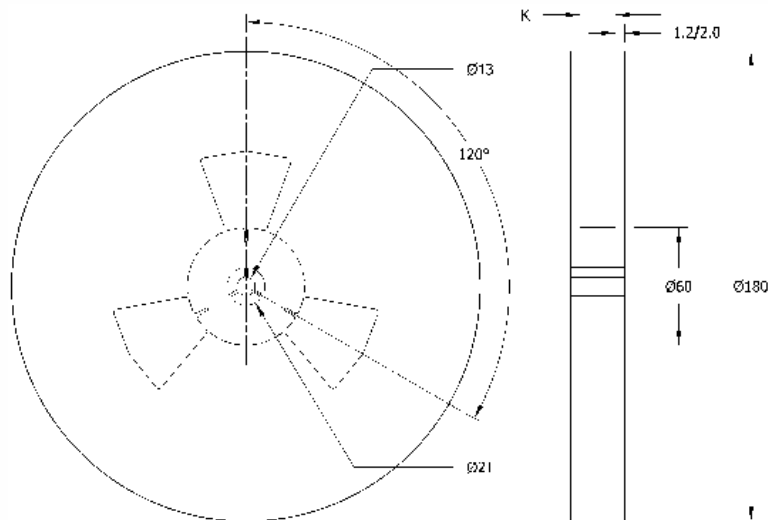

### Tape Dimensions

PACKAGE	A	B	C	D	E	M	QUANTITY
CC32	8.00	3.40	2.70	4.00	1.40	3.50	3000
CC50	12.00	5.30	3.60	8.00	1.40	5.50	1000
CC70	16.00	7.30	5.30	8.00	1.90	7.50	1000

### Reel Dimensions

K
8.00
13.00
17.20

### Notes

- Complete CTS part number, frequency value and date code information must appear on reel and carton labels.



## Addendum

### Common Frequencies Available – MHz

FREQUENCY	FREQUENCY CODE	FREQUENCY	FREQUENCY CODE	FREQUENCY	FREQUENCY CODE	FREQUENCY	FREQUENCY CODE
100.000000	1000	155.520000	1555	250.000000	2500		
106.250000	1062	156.250000	1562	312.500000	3125		
122.880000	1228	160.000000	1600	622.080000	6220		
125.000000	1250	200.000000	2000	644.531250	6445		
150.000000	1500	212.500000	2125				