

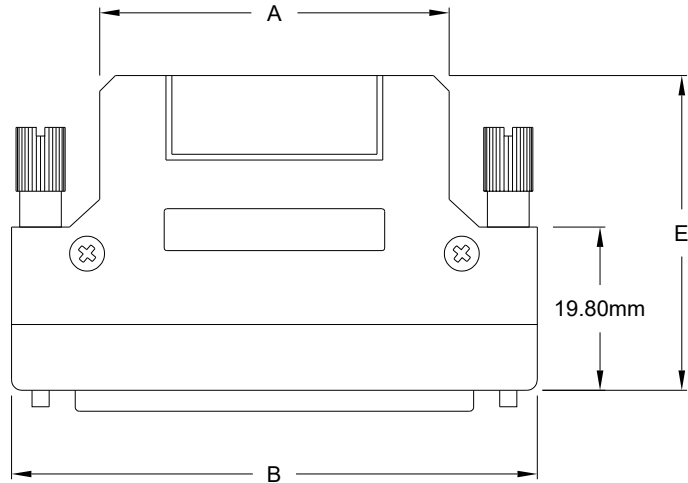


DESCRIPTION: SCS1 2 & 3 DIE CAST WITH THUMBSCREWS



SPECIFICATIONS:

MATERIALS:

- BACK SHELL: ZINC PLATED NICKEL OVER COPPER
- JACKSCREWS: STEEL, NICKEL PLATED OVER COPPER
- SCREWS: STEEL, NICKEL PLATED OVER COPPER
- CLAMP: STEEL, NICKEL PLATED



STRAIN RELIEF CLAMP




| No. OF PINS | DIMENSIONS | | | | |
|-------------|---------------|---------------|---------------|---------------|---------------|
| | A | B | C | D | E |
| 50 | 1.252 [31.80] | 2.98 [53.30] | 0.461 [11.70] | 0.535 [13.60] | 1.520 [38.60] |
| 68 | 1.673 [42.50] | 2.516 [63.90] | 0.465 [11.80] | 0.543 [13.80] | 1.508 [38.30] |

ALL TOLERANCES = 0.012 [0.30]

- KIT INCLUDES:**
- (1) MALE CONNECTOR - SOLDER CUP
 - (2) METAL SHELL HALVES
 - (2) THUMBSCREWS (2-56 THREADS)
 - (1) STRAIN RELIEF CLAMP
 - (2) STRAIN RELIEF SCREWS
 - (2) HOUSING SCREWS

**BACK SHELL KIT
PART NUMBER
989-YYY-130L121**

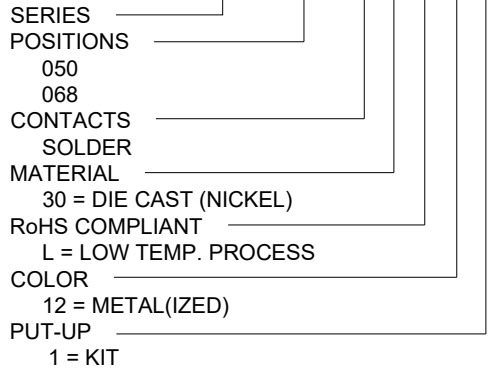

RoHS COMPLIANT

UNITS = inches [mm] **DO NOT SCALE FROM DRAWING**

DRAWN:
N. KOVALSKY
DATE:
04/18/2008



| | | |
|--------------------------------|--------------|-------|
| SCALE: NTS | SHEET 1 OF 3 | REV 4 |
| DWG NO. 989-YYY-130L121 | | |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DESCRIPTION: CONNECTOR FOR 988 SERIES BACK SHELL KIT

SPECIFICATIONS:

MATERIALS:

HOUSING: THERMOPLASTIC, BLACK PBT UL94V-0
 CONTACTS: PHOSPHOR BRONZE
 5u" GOLD MATING AREA
 100u" MIN TIN SOLDER AREA
 FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER


ELECTRICAL:

RATED CURRENT: 0.5A
 DIELECTRIC WITHSTANDING: 500VAC
 INSULATION RESISTANCE: 500 MOhms MIN.
 CONTACT RESISTANCE: 35 mOhms MAX.



ENVIRONMENT:

OPERATING TEMPERATURE: -40°C TO +85°C

MAX RECOMMEND WIRE AWG: 22 AWG

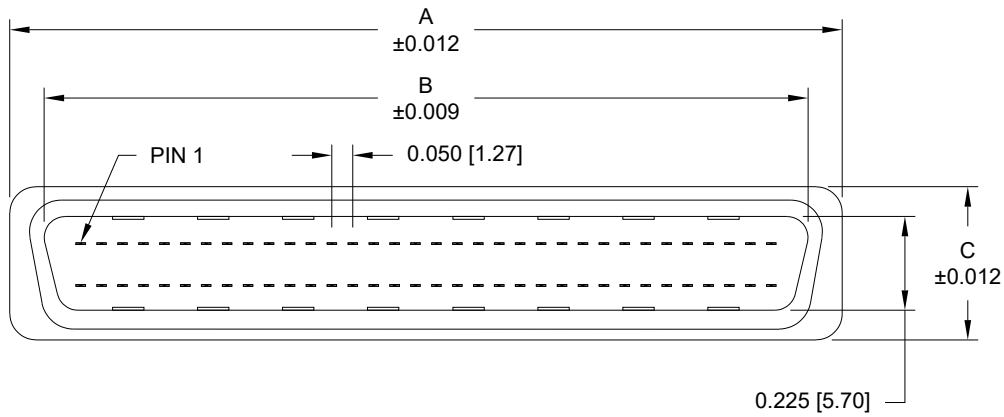

| No. OF PINS | DIMENSIONS | | |
|-------------|---------------|---------------|--------------|
| | A | B | C |
| 50 | 1.545 [39.30] | 1.372 [34.85] | 0.366 [9.30] |
| 68 | 1.996 [50.70] | 1.825 [46.35] | 0.366 [9.30] |

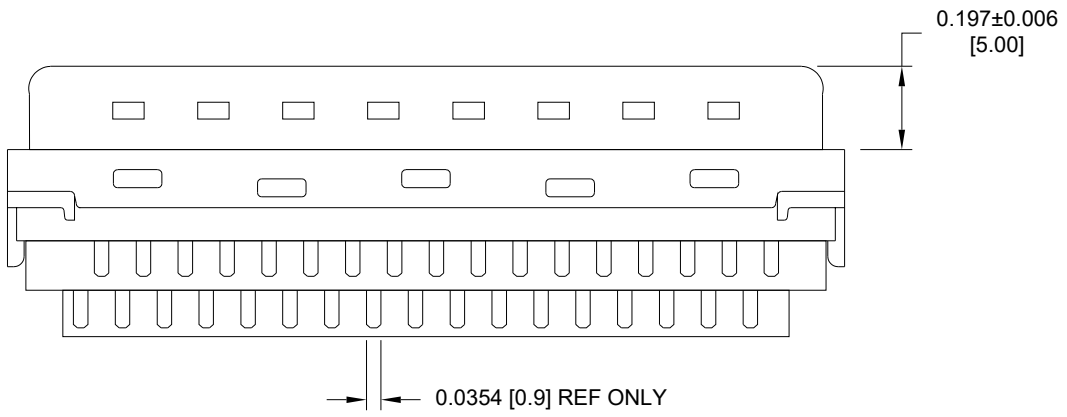

RoHS COMPLIANT

UNITS = inches [mm] DO NOT SCALE FROM DRAWING






THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: N. KOVALSKY
 DATE: 04/18/2008




NorComp

SCALE: NTS SHEET 2 OF 3 REV 4
 DWG NO. 989-YYY-130L121

50 POSITION

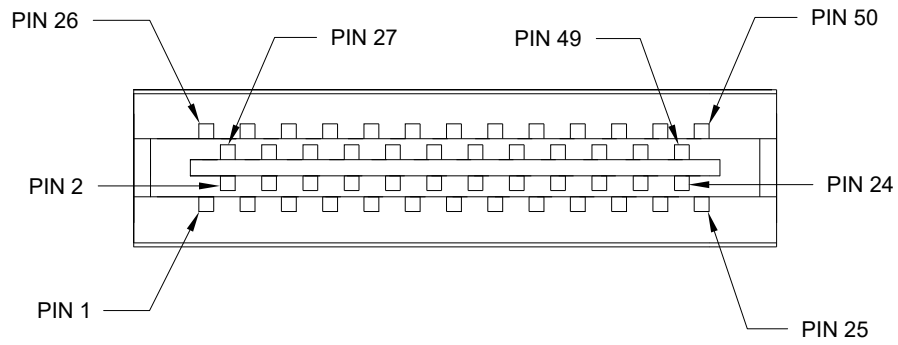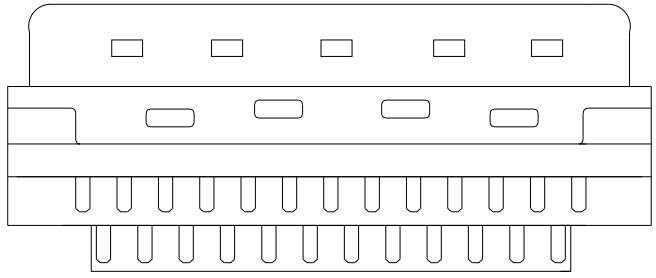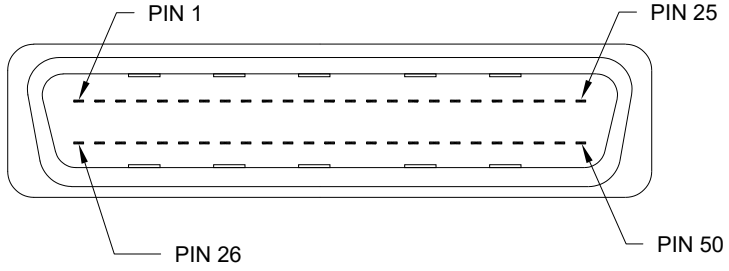

68 POSITION

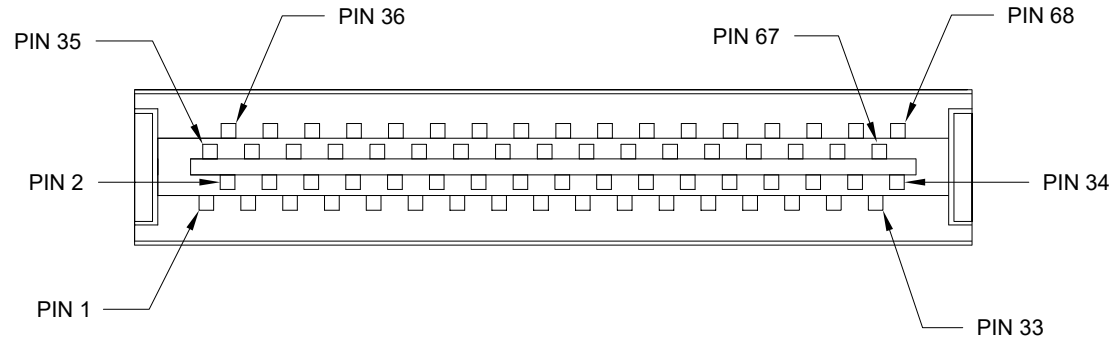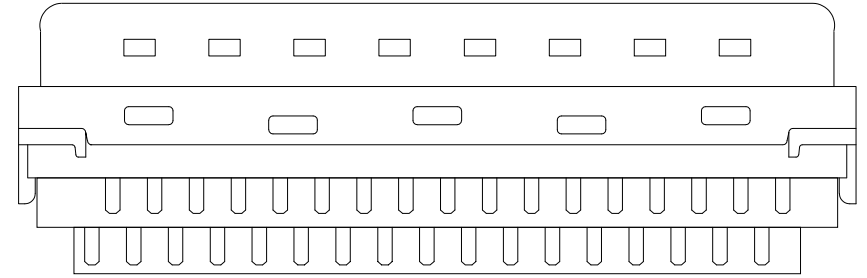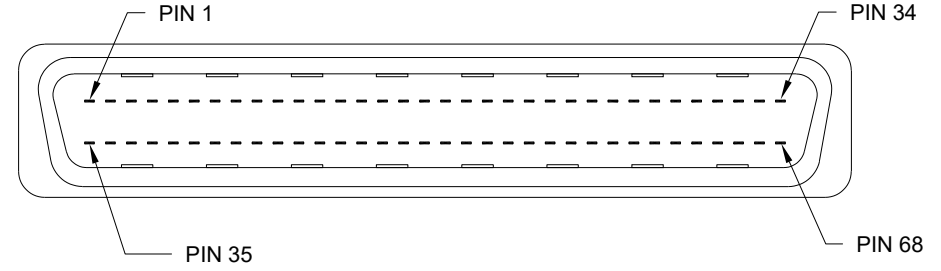

RoHS COMPLIANT

UNITS = inches [mm] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
N. KOVALSKY
DATE:
04/18/2008

NorComp

| | | | |
|---------------|------------|------------------------|----------|
| SCALE: NTS | SHEET 3 | OF 3 | REV 4 |
| DWG NO. | | 989-YYY-130L121 | |