
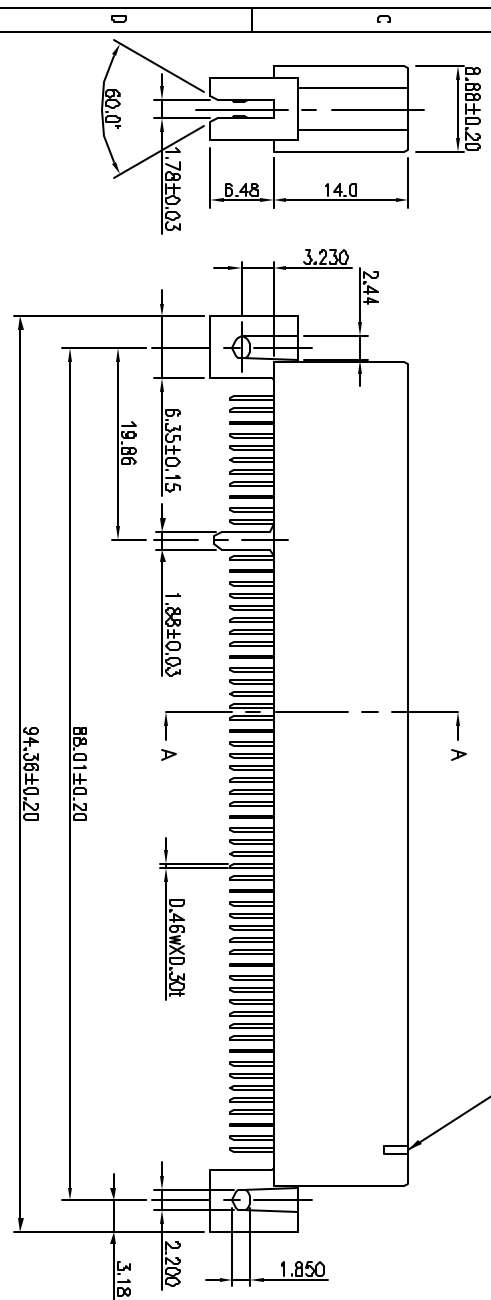


**MATERIAL**  
 INSULATOR: PBT.  
 CONTACT: COPPER ALLOY.  
 PLATING: MATING AREA - GOLD FLASH OVER NICKEL.  
 SOLDER AREA - TIN/LEAD OVER NICKEL.

**ELECTRICAL**  
 VOLTAGE RATING: 250 VAC RMS.  
 CURRENT RATING: 1 AMP.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC RMS 60HZ FOR 1 MINUTE.  
 INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 500 VDC.  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX AT 1 AMP DC.

**MECHANICAL**  
 RETENTION FORCE: 460 GRAMS MIN PER CONTACT.  
 INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.  
 WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR.

**ENVIRONMENTAL**  
 TEMPERATURE RANGE: -55°C TO +85°C.



Sullins Electronics  
 San Marcos, CA  
 www.sullinselectronics.com

TITLE: PCI CARD EDGE SLOT, STR. MOUNT

PART NO. TRWB060DKRQ-1578

DWG NO. P120-05-901

TOLERANCE		ANGLES		FINISH:	
LINEAR	X ±0.20	ANGLES	X ±	APPD:	MAT'L:
	X ±0.15		X ±	CHKD:	FINISH:
REV	ECN NO.	NAME	DATE	DRWN: Jason Deng	QTY:

UNITS	SCALE	SHEET	REV
MM	1 : 1	1 OF 1	B