




Toll Free (877) STL-TIES  
(785-8437)

www.hayata.com

HAYATA, LTD.  
2707 Realty Rd., #306  
Carrollton, TX 75006  
Tel: (214) 360-7708  
Fax: (214) 360-7718

## CT-5 STAINLESS STEEL TIE GUN INSTALLATION TOOL OPERATING INSTRUCTIONS

TOOL SHIPPED FULLY ASSEMBLED

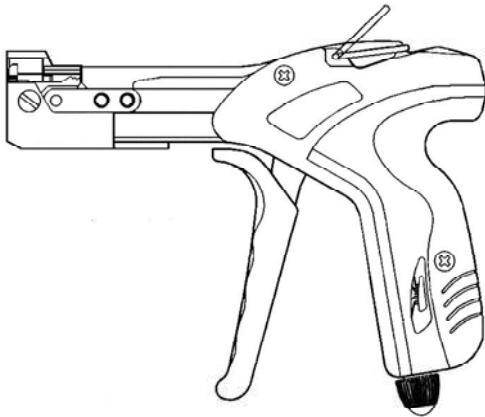

### TOOL MAINTENANCE

TO INHIBIT CORROSION AND MAINTAIN PERFORMANCE OF THE TOOL, KEEP THE METAL SURFACE COATED WITH A LIGHT OIL (WD-40® OR EQUIVALENT).

NOTE: This precision tool has been engineered and designed for use with Hayata's Standard and Heavy Duty Stainless Steel Cable Ties. It is not intended for other uses such as cutting or tensioning other types of fastening devices.

Tensions and cuts RollerBall Ties (TBC), Coated and Uncoated, up to .312" (7.9mm) width.


Tensions and cuts Ladder Ties (KST) .25" (7mm) Uncoated only.

Recommended setting of 1 or 2 for .18" (4.6mm) width ties.

Recommended setting of 2 or 3 for .312" (7.9mm) width ties.

### OPERATION

1. Loop cable tie around bundle and insert tip through head. Pull tie up snug on bundle by hand.
2. Place tool on tie as shown. Adjust tension control as desired.
3. Squeeze handles as many times as necessary to tighten tie to the desired tension.
4. Tie is automatically cut when preset tension is reached.

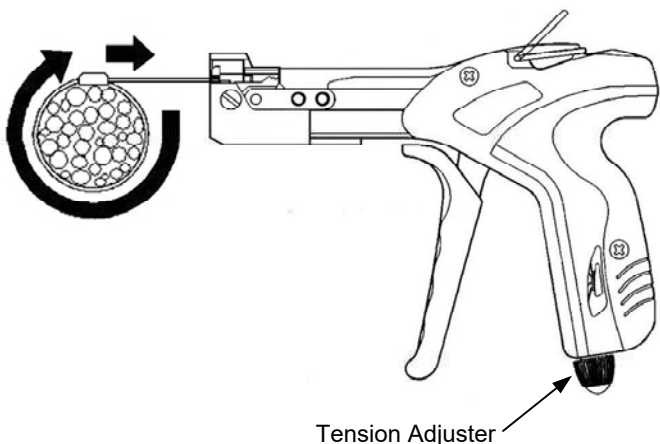

Tension Adjuster

1023

LDW

10/21/20