used for: DIN EN 60603

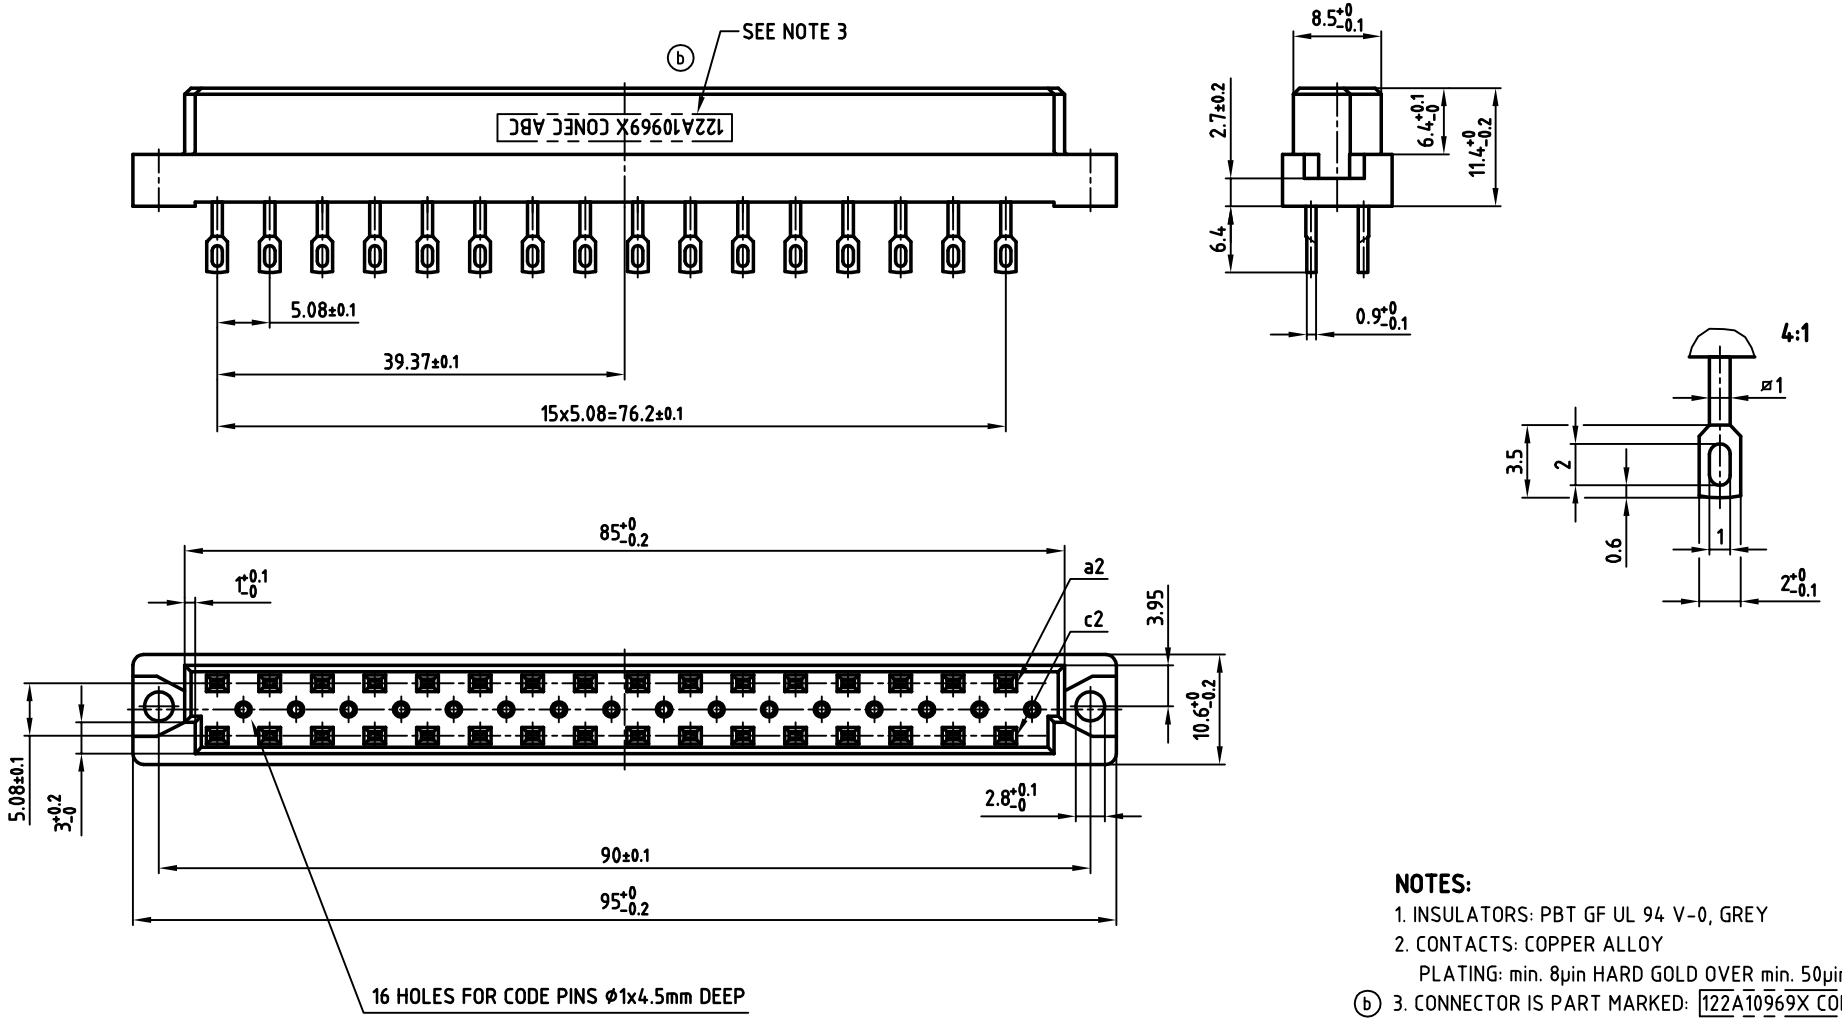

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
   PLATING: min. 8µin HARD GOLD OVER min. 50µin NICKEL
3. (b) CONNECTOR IS PART MARKED: 122A10969X CONEC ABC

Directive 2002/95/EC „RoHS" Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
2 x b	Ä3578	22.02.2010	K.H.
a	Origin		

CONEC CORPORATION
BRAMPTON, ONTARIO

tolerance

	date	name
2000		
drawn	20.12.	Parei
appd.	20.12.	E. Mickenbecker
norm	DIN EN 60603	
d-old		

scale: 2:1 (4:1)
material: SEE NOTES

title:
FEMALE CONNECTOR TYPE "D"
32pos. SOLDER LUG

dwg no: 12K1A030A
AutoCAD 2000
DIN-A 3
sh: 1/1

product no: 122A10969X