



**Series: Stick Antenna** 

**Description: 868-928MHz Dipole Antenna** 

PART NUMBER: W5017




# **Features:**

- Half wave dipole antenna
- Length 179mm
- Gain 0.9 dBi
- Connector SMA Male
- High Efficiency >70%
- Power rating 1W
- IP65 rated

# **Applications:**

- ISM 868 / 915 MHz radios
- IoT, M2M
- Industry automation
- Remote controls
- Toys, Consumer electronics

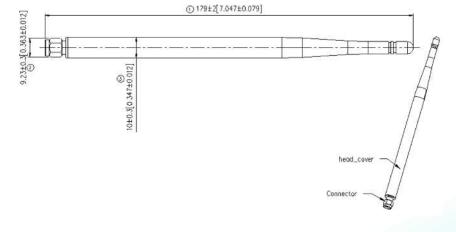

All dimensions are in mm / inches

Issue: 1723

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





**Series: Stick Antenna** 

**PART NUMBER: W5017** 

-					
	ELECTRICAL SPECIFICATIONS				
	Frequency	868-928	MHz		
	Nominal Impedance	50	Ω		
	VSWR	2.5	Max		
	Average efficiency	70	%		
	Peak Gain	0.9	dBi +/- 1 dB		
	Polarization:	Vertical			
	Power withstanding	1	W		
	Connector type	SMA			



#### **TECHNICAL DATA SHEET**

**Description: 868-928MHz Dipole Antenna** 

**Series: Stick Antenna** 

**PART NUMBER: W5017** 

MECHANICAL SPECIFICATIONS				
	Plastic radome	TPEE		
	Color	Black		
	Ingress Protection	IP65		
	Weight	16.6 g		
	Overall Length	7.047 INCHES		

ENVIRONMENTAL SPECIFICATIONS			
Operating temperature	-40/+85° C		
Temperature	-40/+85° C		
Salt mist	24hours		






**Series: Stick Antenna** 

**PART NUMBER: W5017** 

#### **MECHANICAL DRAWING**

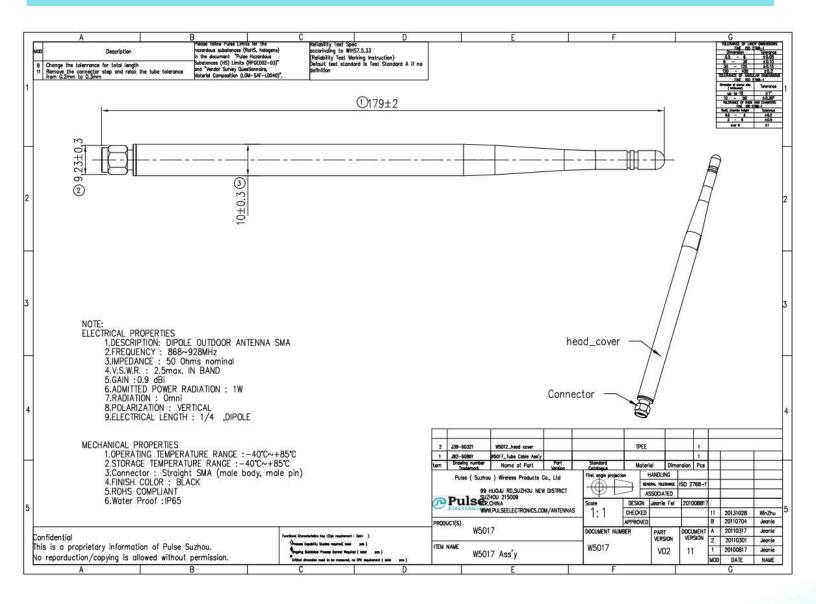






**Series: Stick Antenna** 

**PART NUMBER: W5017** 

# **CHARTS**

# **VSWR**

# VSWR vs Frequency measured in free space W5017 measured in PSU

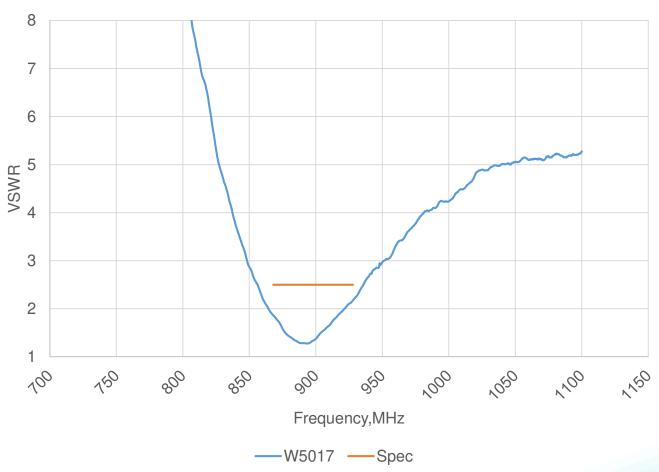








**Series: Stick Antenna** 

**PART NUMBER: W5017** 

# **CHARTS**

# Efficiency

# Efficiency vs Frequency measured in free space W5017 measured in PSU

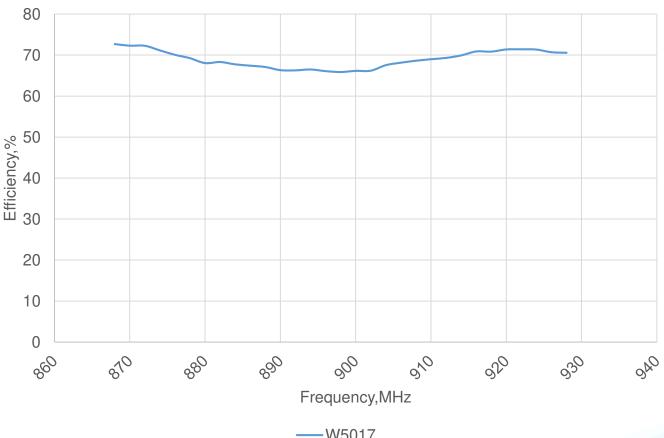

W5017







Description:

**Description: 868-928MHz Dipole Antenna** 


**Series: Stick Antenna** 

**PART NUMBER: W5017** 

# **CHARTS**

# Peak Gain

# Peak Gain vs Frequency measured in free space W5017measured in PSU

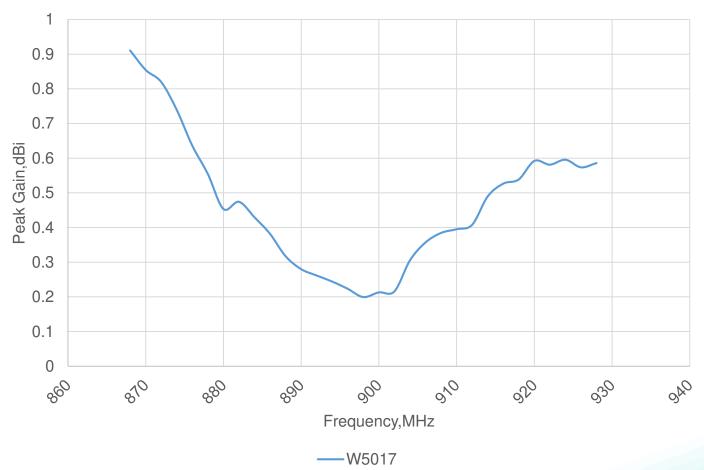








Series: Stick Antenna

**Description: 868-928MHz Dipole Antenna** 

**PART NUMBER: W5017** 

# **CHARTS**

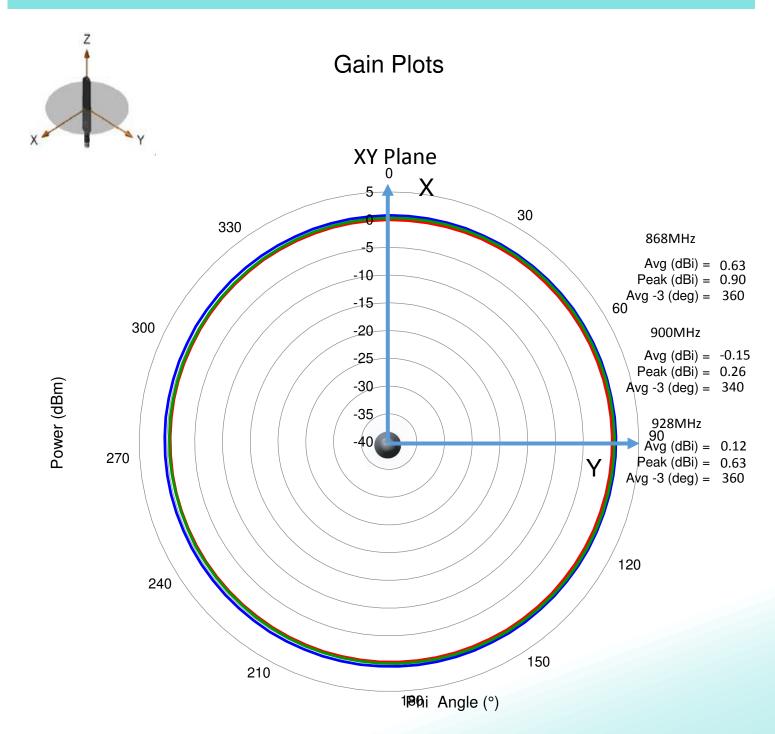

Issue: 1723








**Series: Stick Antenna** 

**PART NUMBER: W5017** 

# **CHARTS**

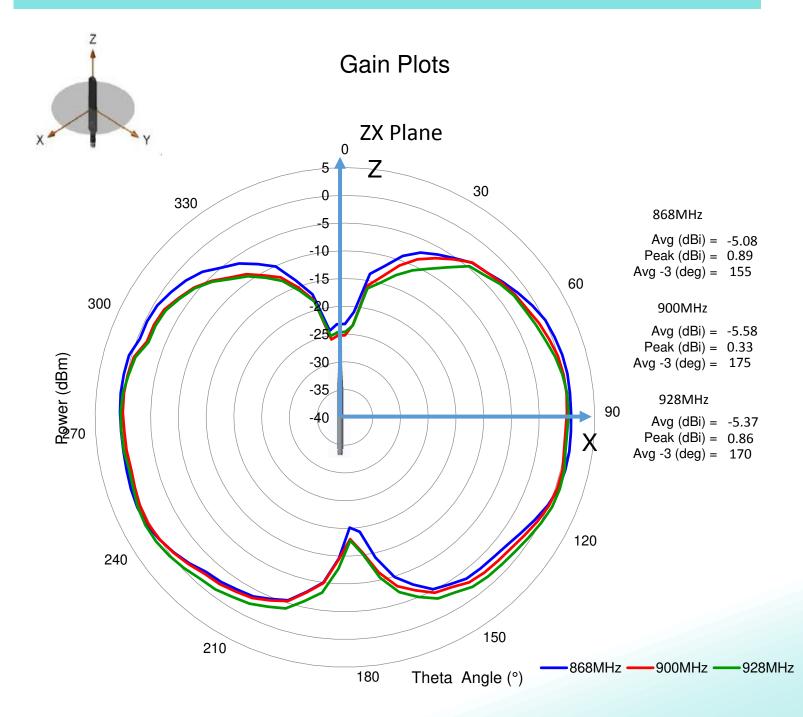






**Series: Stick Antenna** 

**PART NUMBER: W5017** 

# **CHARTS**

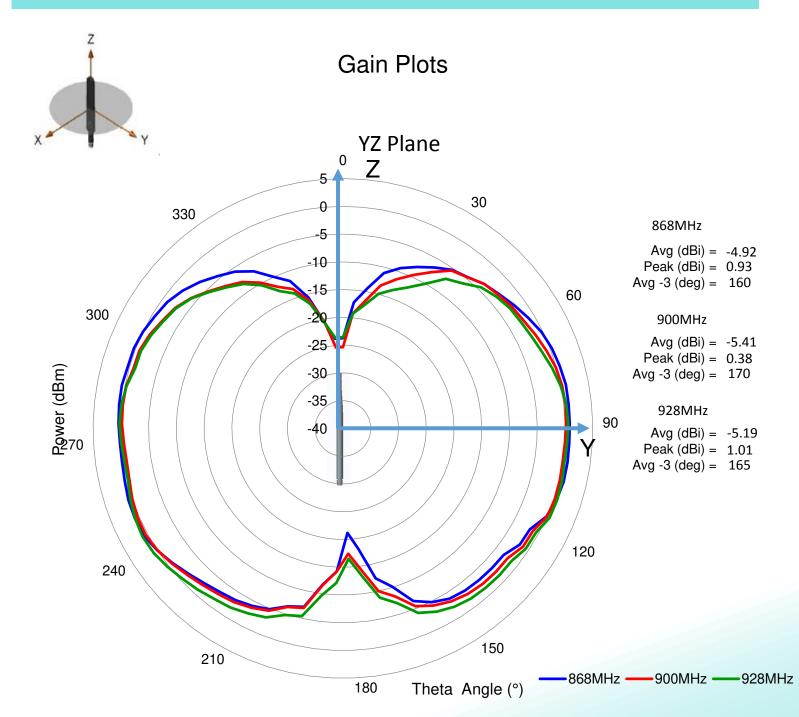

Issue: 1723





**Series: Stick Antenna** 

#### **TECHNICAL DATA SHEET**

**Description: 868-928MHz Dipole Antenna** 

**PART NUMBER: W5017** 

# **PACKAGING**

600 pcs antenna per box