



M 1:1

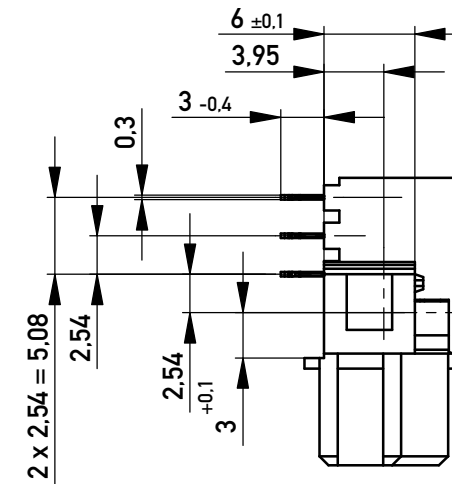

Bestückungsplan / contact layout

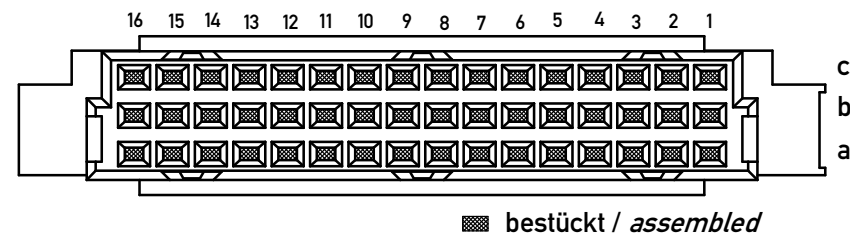

Elastische Einpresszone / compliant pressfit zone

Isolierwerkstoff / housing material : PBT GF 30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2


Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 Nr.6

diameter of drilled hole see drawing 164062 No.6

1)  $\phi 1.0^{+0.09}_{-0.06}$  Durchmesser des metallisierten Loches

$\phi 1.0^{+0.09}_{-0.06}$  Diameter of finished plated-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

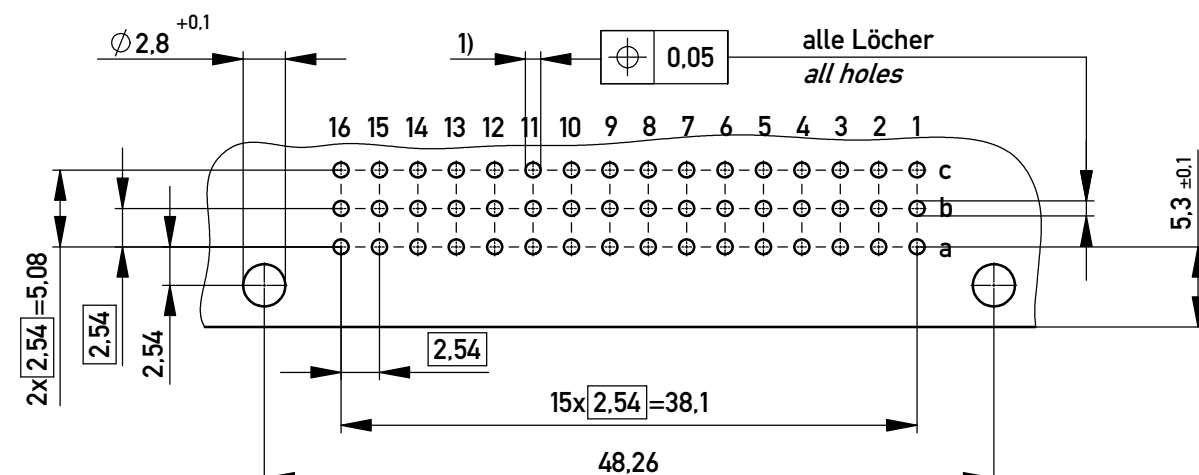

Copyright by ERNI Production GmbH & Co. KG  
Proprietary notice pursuant to ISO 16016 to be observed.

|  |            |                      |  |
|--|------------|----------------------|--|
| Information:   |            | Tolerances           | Scale 2:1  |
| All rights reserved.<br>Only for Information.<br>To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. |            | All Dimensions in mm | Designation<br><b>Federleiste R/2 48 EE</b><br><b>Fem. Connector R/2 48 Pressfit</b> |
| www.ERNI.com   |            |                      |  |
| a  | 10.06.2016 |                      | 1  |
| Index  | Date       |                      | A3   |
|  |            | Class                | STVR/2   |