

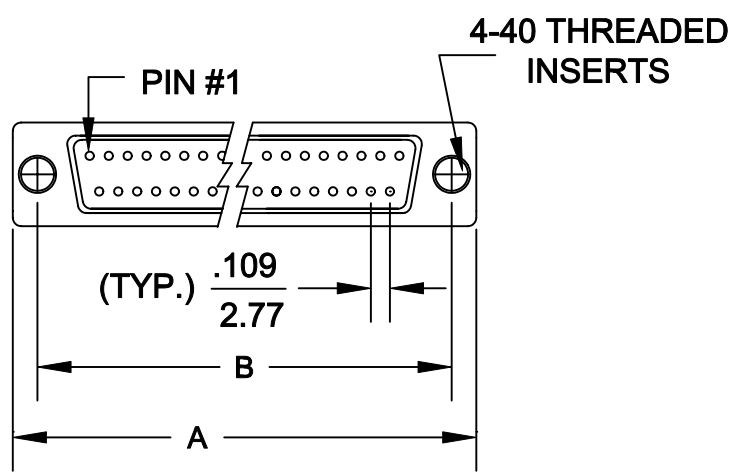


**DESCRIPTION: ECONOMY FLAT RIBBON CONNECTOR**

	A	B	C
9	1.213	.984	.850
	30.89	24.99	21.50
15	1.541	1.312	.850
	39.14	33.32	21.50
25	2.090	1.852	.850
	53.09	47.04	21.50
37	2.732	2.500	.850
	69.39	63.50	21.50

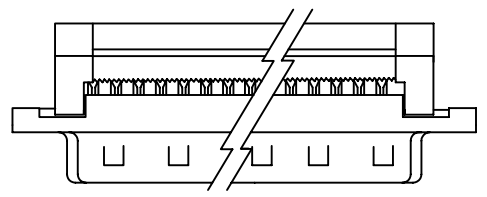

186-XXX-192L001

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 009 \_\_\_\_\_  
 015 \_\_\_\_\_  
 025 \_\_\_\_\_  
 037 \_\_\_\_\_  
 050 \_\_\_\_\_  
 GENDER \_\_\_\_\_  
 1 = MALE  
 2 = FEMALE  
 TERMINATION \_\_\_\_\_  
 9 = IDC  
 SHELL PLATING \_\_\_\_\_  
 2 = TIN  
 HARDWARE OPTIONS \_\_\_\_\_  
 00 = NO HARDWARE  
 55 = 4-40 INSERTS  
 PLATING OPTIONS \_\_\_\_\_  
 01 = GOLD FLASH

**SPECIFICATIONS:**

**MATERIALS:**

- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED PBT +30% FIBER-GLASS OR NYLON-66
- CONTACTS: BRASS
- RoHS COMPLIANT

**ELECTRICALS:**

- CURRENT RATING: 1 AMP
- CONTACT RESISTANCE: 15 mOHMS MAX
- INSULATOR RESISTANCE: 1000 MOHMS MIN
- VOLTAGE: 500V AC FOR 1 MINUTE
- TEMPERATURE: -55°C TO +100°C

**FOR USE WITH 26/28 AWG STRANDED .050 CENTER FLAT CABLE**

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>WAYNE ROBBINS</b>	DATE: <b>9-16-05</b>
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: 1:1	SHEET 1 OF 1	REV 1
		DWG NO. <b>186-XXX-192L551</b>		