

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Profibus	Interbus	CAN-Bus/Feldbus
CFBUS.001-CFBUS.003	CFBUS.010-CFBUS.011	CFBUS.020-CFBUS.022
DeviceNet	CC-Link	Ethernet (CAT5/CAT5e/GigE/PoE)
CFBUS.030-CFBUS.031	CFBUS.035	CFBUS.040-CFBUS.045
Ethernet (CAT6/GigE/PoE)	Ethernet (CAT6 <sub>A</sub> /PoE)	Ethernet (CAT7/PoE)
CFBUS.049	CFBUS.050	CFBUS.052
FireWire 400 (IEEE 1394a)	Profinet (Type C)	USB 2.0
CFBUS.055	CFBUS.060	CFBUS.065-CFBUS.066

Guarantee  
 igus chainflex  
**36**  
 months

igus 36-month  
 chainflex cable  
 guarantee and  
 service life  
 calculator based  
 on 2 billion test  
 cycles per year



# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image








# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Cable structure

-  **Conductor** Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
-  **Core insulation** According to bus specification.
-  **Core structure** According to bus specification.
-  **Core identification** According to bus specification.  
▶ Product range table
-  **Inner jacket** TPE mixture adapted to suit the requirements in e-chains®.
-  **Overall shield** Extremely bending-resistant braiding made of tinned copper wires.  
Coverage approx. 70 % linear, approx. 90 % optical
-  **Outer jacket** Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®.  
Colour: Red lilac (similar to RAL 4001), Variants ▶ Product range table  
Printing: black

„00000 m\*\* igus chainflex CFBUS.---① -----② E310776 cRUus AWM  
 Style -----③ VW-1 AWM I/II A/B 80°C ---V④ FT1 DNV-GL ⑤ EAC/ CTP CE  
 ---⑥ ---⑦ conform RoHS-II conform www.igus.de+++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
 ① / ② Cable identification according to Part No. (see technical table).  
 ③ / ④ Printing of UL Style and UL Voltage rating (see related chapter).  
 ⑤ Printing DNV-GL Type Approval Certificate.  
 ⑥ Printing: DESINA (only if DESINA is fulfilled).  
 ⑦ Printing according to bus specification (inclusive wave resistance).  
 Example: chainflex **CFBUS.001 (2x0.25)C**



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



### Guaranteed service life according to guarantee conditions

Double strokes	5 million		7.5 million		10 million	
	CFBUS .001-.049	CFBUS .050-.070	CFBUS .001-.049	CFBUS .050-.070	CFBUS .001-.049	CFBUS .050-.070
	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
-35/-25	12.5	15	13.5	16	14.5	17
-25/+60	10	12.5	11	13.5	12	14.5
+60/+70	12.5	15	13.5	16	14.5	17

Minimum guaranteed service life of the cable under the specified conditions.  
 The installation of the cable is recommended within the middle temperature range.

Example image







# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Properties and approvals

	<b>UV resistance</b>	Medium
	<b>Oil resistance</b>	Oil-resistant (following DIN EN 60811-404), bio-oil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
	<b>Flame retardant</b>	According to IEC 60332-1-2, FT1, VW-1 <b>CFBUS.030/CFBUS.065/CFBUS.066:</b> According to IEC 60332-1-2, FT2
	<b>Silicone-free</b>	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	<b>UL verified</b>	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	<b>UL/CSA AWM</b>	See data sheet for details ► <a href="http://www.igus.eu/CFBUS">www.igus.eu/CFBUS</a>
	<b>NFPA</b>	Following NFPA 79-2018, chapter 12.9
	<b>CLPA</b>	<b>CFBUS.045:</b> <i>CC-Link IE field</i> , Reference no. 130 <b>CFBUS.049:</b> <i>CC-Link IE field</i> , Reference no. 137
	<b>DNV-GL</b>	Type approval certificate No. TAE00003X5 <b>CFBUS.040-CFBUS.052:</b> Type approval certificate No. TAE00003X7
	<b>EAC</b>	Certificate No. RU C-DE.ME77.B.00295/19 (TR ZU)
	<b>REACH</b>	In accordance with regulation (EC) No. 1907/2006 (REACH)
	<b>Lead-free</b>	Following 2011/65/EC (RoHS-II/RoHS-III)
	<b>Cleanroom</b>	According to ISO Class 1. The outer jacket material of this series complies with CF34. UL.25.04.D - tested by IPA according to standard DIN EN ISO 14644-1
	<b>DESINA</b>	According to VDW, DESINA standardisation
	<b>CE</b>	Following 2014/35/EU



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Properties and approvals

#### UL/CSA AWM Details

Part No.	UL style core insulation	UL style outer jacket	UL Voltage Rating	UL Temperature Rating
			V	°C
CFBUS.001	11807	21218	600	80
CFBUS.002	11807 (0.25 mm <sup>2</sup> ) 11551 (1.5 mm <sup>2</sup> )	21218	600	80
CFBUS.003	11807 (0.25 mm <sup>2</sup> ) 11551 (0.75 mm <sup>2</sup> )	21218	600	80
CFBUS.010	11551	21218	600	80
CFBUS.011	11551	21218	600	80
CFBUS.020	11807	21218	600	80
CFBUS.021	11807	21218	600	80
CFBUS.022	11807	21218	600	80
CFBUS.030	11807 (AWG24) 11551 (AWG22)	21187	600	80
CFBUS.031	11807 (AWG24) 11551 (AWG22)	21218	600	80
CFBUS.035	11807	21218	600	80
CFBUS.040	11632	21218	600	80
CFBUS.045	11632	21218	600	80
CFBUS.049	11632	21218	600	80
CFBUS.050	11632	21218	600	80
CFBUS.052	11632	21218	600	80
CFBUS.055	11632 (0.15 mm <sup>2</sup> ) 11551 (0.34 mm <sup>2</sup> )	21218	600	80
CFBUS.060	11632	21218	600	80
CFBUS.065	1589	22186	30	80
CFBUS.066	1589	22186	30	80



Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year







# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant


### Dynamic information

	<b>Bend radius</b>	<b>e-chain® linear</b>	min. 10 x d (CFBUS.001-.049 and CFBUS.060) min. 12.5 x d (CFBUS.050-.055 and CFBUS.070)
		<b>flexible</b>	min. 8 x d
		<b>fixed</b>	min. 5 x d
	<b>Temperature</b>	<b>e-chain® linear</b>	-35 °C up to +70 °C
		<b>flexible</b>	-45 °C up to +70 °C (following DIN EN 60811-504)
		<b>fixed</b>	-50 °C up to +70 °C (following DIN EN 50305)
	<b>v max.</b>	<b>unsupported</b>	10 m/s
		<b>gliding</b>	6 m/s
	<b>a max.</b>		100 m/s <sup>2</sup>
	<b>Travel distance</b>		Unsupported travel distances and up to 400 m for gliding applications, Class 6

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

### Typical lab test setup for this cable series

<b>Test bend radius R</b>	approx. 75 - 100 mm
<b>Test travel S/S<sub>2</sub></b>	approx. 1 - 15 m
<b>Test duration</b>	minimum 2 - 4 million double strokes
<b>Test speed</b>	approx. 0,5 - 2 m / s
<b>Test acceleration</b>	approx. 0.5 - 1.5 m / s <sup>2</sup>

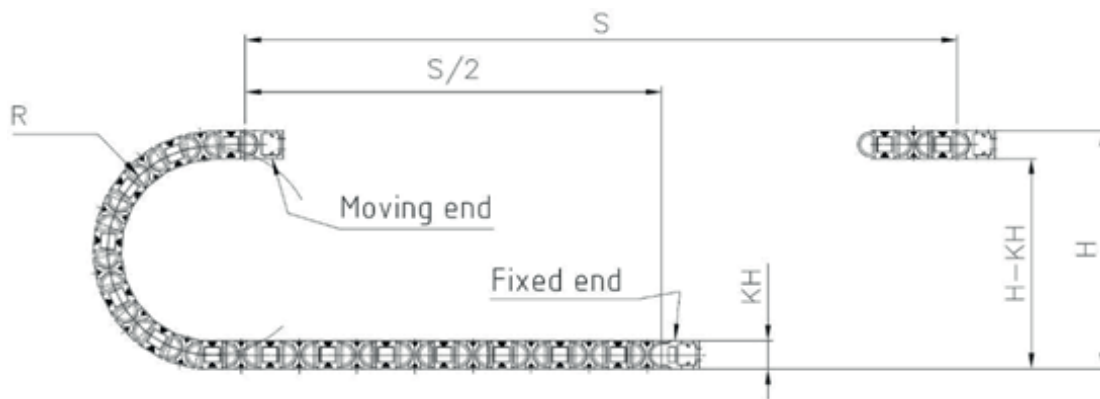

### Typical application areas

- For extremely heavy duty applications, Class 6
- Unsupported travel distances and up to 400 m and more for gliding applications, Class 6
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- No torsion, Class 1
- Indoor and outdoor applications without direct solar radiation
- Storage and retrieval units for high-bay warehouses, Machining units/machine tools, quick handling, Clean room, semiconductor insertion, indoor cranes, low temperature applications



Example image

igus® chainflex® CFBUS.049

# Data sheet






## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm <sup>2</sup> ]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
<b>Profibus (1x2x0,64 mm)</b>				
CFBUS.001	(2x0.25)C	9.0	33	92
CFBUS.002	(2x0.25)C+4x1.5	12.5	94	191
CFBUS.003	(2x0.25)C+3G0.75	11.5	55	145
<b>Interbus</b>				
CFBUS.010	(3x(2x0.25))C	9.0	47	91
CFBUS.011	(3x(2x0.25)+(3G1.0))C	10.5	87	152
<b>CAN-Bus/Feldbus</b>				
CFBUS.020 <sup>2)</sup>	(4x0.25)C	6.5	28	58
CFBUS.021	(2x0.5)C	8.0	39	81
CFBUS.022 <sup>2)</sup>	(4x0.5)C	8.0	43	87
<b>DeviceNet</b>				
CFBUS.030 <sup>4)</sup>	((2xAWG24)C+2xAWG22)C	7.0	36	57
CFBUS.031 <sup>4)</sup>	((2xAWG18)C+2xAWG15)C	11.5	103	174
<b>CC-Link</b>				
CFBUS.035	 (3xAWG20)C	8.5	43	96
<b>Ethernet/CAT5/PoE</b>				
CFBUS.040	 (4x0.25)C	7.0	33	59
<b>Ethernet/CAT5e/PoE</b>				
CFBUS.045	 (4x(2x0.15))C	8.5	42	84
<b>Ethernet/CAT6/PoE</b>				
CFBUS.049	 (4x(2x0.15))C	8.5	42	84
<b>Ethernet/CAT6<sub>A</sub>/PoE</b>				
CFBUS.050 <sup>4)</sup>	(4x(2x0.15)C)C	10.5	83	134
<b>Ethernet/CAT7/PoE</b>				
CFBUS.052 <sup>4)</sup>	(4x(2x0.15)C)C	10.5	89	133
<b>FireWire 1394a</b>				
CFBUS.055	2x(2x0.15)C+2x(0.34)C	8.0	39	76
<b>Profinet</b>				
CFBUS.060 <sup>2) 13)</sup>	 (4x0.38)C	7.5	39	74
<b>USB</b>				
CFBUS.065	((2xAWG28)+2xAWG20)C	5.5	28	45
CFBUS.066	((2xAWG24)+2xAWG20)C	6.5	32	51
<b>DVI</b>				
CFBUS.070 <sup>4) 6)</sup>	(4x(2xAWG28)C +(2xAWG28)+3xAWG28)C	9.0	35	95

Example image  
igus® chainflex® CFBUS.049

<sup>2)</sup> The chainflex® types marked with 2) are cables designed as a star-quad.

<sup>4)</sup> Manufactured without inner jacket

<sup>6)</sup> without cULus

<sup>13)</sup> Colour outer jacket: Yellow-green (RAL 6018)

**G** = with green-yellow earth core

**x** = without earth core

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Profibus

CFBUS.001-CFBUS.003

### Cable structure

(Electrical information please see next page)

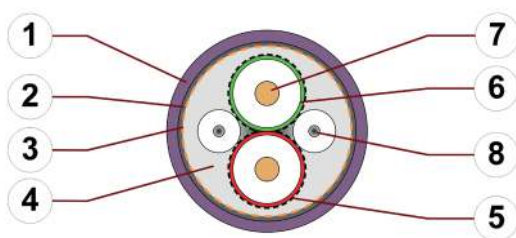

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Copper clad plastic foil
4. Inner jacket: Pressure extruded, gusset-filling TPE mixture
5. Banding: Plastic foil
6. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
7. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
8. Filler: Plastic dummy

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.001	2x0.25	red, green	
CFBUS.002	(2x0.25) 4x1.5	red/green black with white numbers 1-4	
CFBUS.003	(2x0.25) 3G0.75	red/green black, blue, green-yellow	



Example image





# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### Profibus

CFBUS.001-CFBUS.003

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.001	CFBUS.002	CFBUS.003
Nominal voltage		50 V 600 V (following UL)	
Testing voltage (following DIN EN 50289-1-3)		500 V	
Characteristic wave impedance (following DIN EN 50289-1-11)		150 ± 15 Ω (20 MHz)	

### Line attenuation approx. [dB/100m]

Part No.	9.6 kHz	38.4 kHz	4 MHz	16 MHz
CFBUS.001	0.3	0.4	2.6	5.5
CFBUS.002	0.3	0.4	2.6	5.5
CFBUS.003	0.3	0.4	2.6	5.5

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
0.25	68	5
0.75	28.6	14
1.5	14.6	21

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Interbus

CFBUS.010-CFBUS.011

### Cable structure

(Electrical information please see next page)

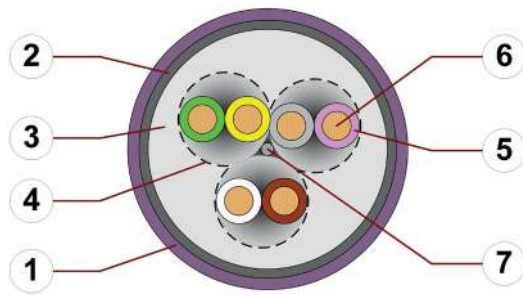

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Inner jacket: Pressure extruded, gusset-filling TPE mixture
4. Banding: Plastic fleece
5. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
6. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
7. Strain relief: Tensile stress-resistant centre element

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.010	3x(3x0.25)	white/brown, green/yellow, grey/pink	
CFBUS.011	3x(2x0.25)	white/brown, green/yellow, grey/pink	
	3G1.0	red, blue, green-yellow	



Example image

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### Interbus

CFBUS.010-CFBUS.011

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.010	CFBUS.011
Nominal voltage	50 V 600 V (following UL)	
Testing voltage (following DIN EN 50289-1-3)	500 V	
Characteristic wave impedance (following DIN EN 50289-1-11)	100 ± 15 Ω (at 20 MHz)	

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
0.25	81	5
1	21.5	17

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### CAN-Bus/Feldbus

CFBUS.020-CFBUS.022

### Cable structure

(Electrical information please see next page)

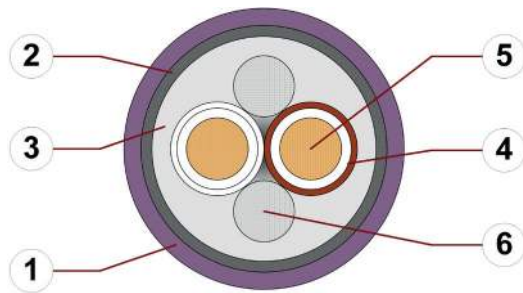

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Inner jacket: Pressure extruded, gusset-filling TPE mixture
4. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
5. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
6. Filler: Plastic yarns

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.020	4x0.25	white, green, brown, yellow (Star-quad)	
CFBUS.021	2x0.5	white, brown	
CFBUS.022	4x0.5	white, green, brown, yellow (Star-quad)	



# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### CAN-Bus/Feldbus

CFBUS.020-CFBUS.022

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.020	CFBUS.021	CFBUS.022
Nominal voltage		50 V 600 V (following UL)	
Testing voltage (following DIN EN 50289-1-3)		500 V	
Characteristic wave impedance (following DIN EN 50289-1-11)		120 ± 12 Ω (at 1 MHz)	

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
0.25	79	5
0.5	41	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### DeviceNet

CFBUS.030-CFBUS.031

### Cable structure

(Electrical information please see next page)

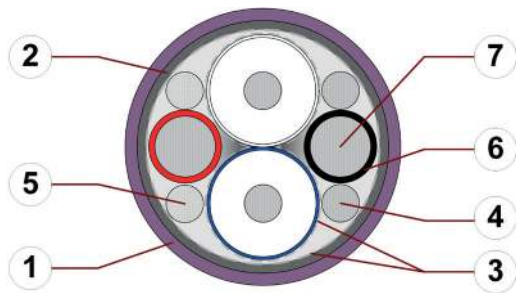

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Aluminium clad plastic foil
4. Drain wire: Tinned copper wires
5. Filler: Plastic yarns
6. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
7. Conductor: Fine-wire strand in especially bending-stable version consisting of tinned copper wires

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.030	(2xAWG24)C	white/blue	
	2xAWG22	red, black	
CFBUS.031	(2xAWG18)C	white/blue	
	2xAWG15	red, black	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

igus® chainflex® CFBUS.049

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### DeviceNet

CFBUS.030-CFBUS.031

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.030	CFBUS.031
Nominal voltage	50 V 600 V (following UL)	
Testing voltage (following DIN EN 50289-1-3)	500 V	
Characteristic wave impedance (following DIN EN 50289-1-11)	120 ± 12 Ω (at 1 MHz)	

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
AWG24	86	5
AWG22	54,5	7
AWG18	21	14
AWG15	15	21

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

**CC-Link**  
 CFBUS.035

### Cable structure

(Electrical information please see next page)

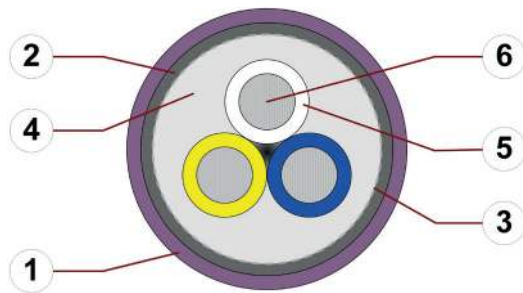

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Aluminium clad plastic foil
4. Inner jacket: Pressure extruded, gusset-filling TPE mixture
5. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
6. Conductor: Fine-wire strand in especially bending-stable version consisting of tinned copper wires

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.035	3xAWG20	white, blue, yellow	



Example image





# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

**CC-Link**  
CFBUS.035

### Electrical information

(Cable structure please see previous page)

<b>Part No.</b>	<b>CFBUS.035</b>
<b>Nominal voltage</b>	50 V 600 V (following UL)
<b>Testing voltage</b> (following DIN EN 50289-1-3)	500 V
<b>Characteristic wave impedance</b> (following DIN EN 50289-1-11)	110 ± 11 Ω (1-100 MHz)

<b>Conductor nominal cross section</b>	<b>Maximum conductor resistance at 20 °C</b> (following DIN EN 50289-1-2)	<b>Maximum current rating at 30 °C</b> (following DIN VDE 0298-4)
<b>[mm<sup>2</sup>]</b>	<b>[Ω/km]</b>	<b>[A]</b>
AWG20	41	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Ethernet (CAT5/CAT5e/GigE/PoE) CFBUS.040-CFBUS.045

#### Cable structure

(Electrical information please see next page)

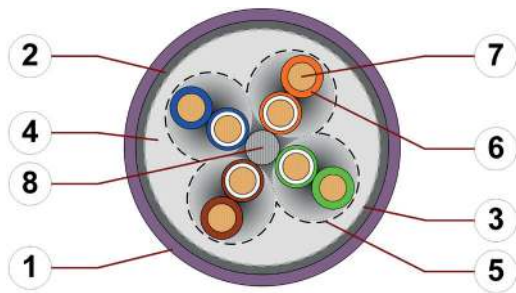

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Aluminium clad plastic foil
4. Inner jacket: Pressure extruded, gusset-filling TPE mixture
5. Banding: Plastic fleece
6. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
7. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
8. Strain relief: Tensile stress-resistant centre element

#### Example image

For detailed overview please see design table

#### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.040	(4x0.25)C	white, green, brown, yellow (Star-quad)	
CFBUS.045	(4x(2x0.15))C	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

igus® chainflex® CFBUS.049

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



### Ethernet (CAT5/CAT5e/GigE/PoE)

CFBUS.040-CFBUS.045

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.040	CFBUS.045
Nominal voltage	50 V 600 V (following UL)	
Testing voltage (following DIN EN 50289-1-3)	500 V	
Characteristic wave impedance (following DIN EN 50289-1-11)	100 ± 25 Ω	
Operating capacity (following DIN EN 50289-1-5)	50 pF/m	60 pF/m
Nominal Velocity of Propagation (NVP)	66 %	67 %

### Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz
CFBUS.040	3.2	6.0	9.5	12.1	13.6	17.1	24.8	32.0
CFBUS.045	3.2	6.0	9.5	12.1	13.6	17.1	24.8	32.0

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
0.15	111	2.5
0.25	70	5

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

Part No.	Bus type	Link class	Maximum transmission length
CFBUS.040	Ethernet/CAT5	Class D - (Data applications up to 100 MHz)	60 m
CFBUS.045	Ethernet/CAT5e	Class D - (Data applications up to 100 MHz)	60 m



Example image

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant




### Ethernet (CAT6/GigE/PoE)

CFBUS.049

### Cable structure

(Electrical information please see next page)

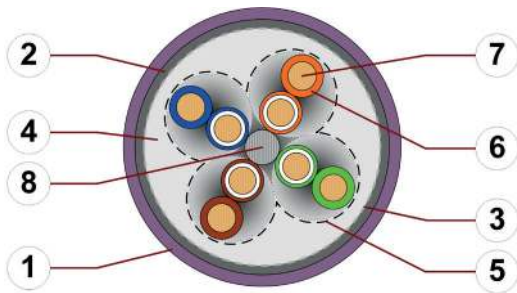

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Aluminium clad plastic foil
4. Inner jacket: Pressure extruded, gusset-filling TPE mixture
5. Banding: Plastic fleece
6. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
7. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
8. Strain relief: Tensile stress-resistant centre element

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.049	4x(2x0.15)	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown	



Example image

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image  
 igus® chainflex® CFBUS.049

### Ethernet (CAT6/GigE/PoE) CFBUS.049

#### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.049
Nominal voltage	50 V 600 V (following UL)
Testing voltage (following DIN EN 50289-1-3)	500 V
Characteristic wave impedance (following DIN EN 50289-1-11)	100 ± 25 Ω
Operating capacity (following DIN EN 50289-1-5)	60 pF/m
Nominal Velocity of Propagation (NVP)	67 %

#### Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz	150 MHz	200 MHz	250 MHz
CFBUS.049	3.2	6.0	9.5	12.1	13.6	17.1	24.8	32.0	40.0	47.5	55.0

Conductor nominal cross section [mm <sup>2</sup> ]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C (following DIN VDE 0298-4) [A]
0.15	111	2.5

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

Part No.	Bus type	Link class	Maximum transmission length
CFBUS.049	Ethernet/CAT6	Class E - (Data applications up to 250 MHz)	60 m



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

**Ethernet (CAT6<sub>A</sub>/PoE)**  
 CFBUS.050

### Cable structure

(Electrical information please see next page)

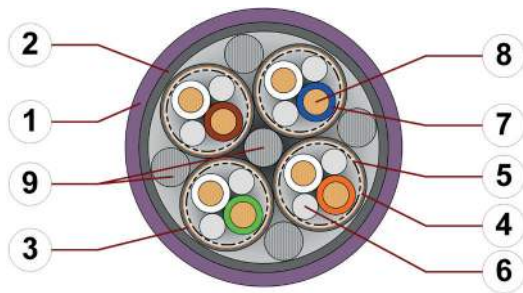

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Element shield: Extremely bending-resistant braiding made of tinned copper wires
4. Element banding: Several layer of fleece, wrapped in different directions
5. Element shield foil: Copper clad plastic foil
6. Filler: Plastic dummy
7. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
8. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
9. Strain relief: Tensile stress-resistant centre element

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.050	4x(2x0.15)C	white/blue, white/orange, white/green, white/brown	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

igus® chainflex® CFBUS.049

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



### Ethernet (CAT6<sub>A</sub>/PoE) CFBUS.050

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.050
Nominal voltage	50 V 600 V (following UL)
Testing voltage (following DIN EN 50289-1-3)	500 V
Characteristic wave impedance (following DIN EN 50289-1-11)	100 ± 25 Ω
Operating capacity (following DIN EN 50289-1-5)	50 pF/m
Nominal Velocity of Propagation (NVP)	64 %

### Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz	150 MHz	200 MHz	250 MHz	350 MHz	500 MHz
CFBUS.050	3.2	5.7	8.9	11.2	12.6	15.8	22.5	28.7	35.5	41.4	46.6	55.9	67.9

Conductor nominal cross section [mm <sup>2</sup> ]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C (following DIN VDE 0298-4) [A]
0.15	133	2.5

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

Part No.	Bus type	Link class	Maximum transmission length
CFBUS.050	Ethernet/CAT6 <sub>A</sub>	Class EA - (Data applications up to 500 MHz)	45 m



Example image  
igus® chainflex® CFBUS.049

# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

**Ethernet (CAT7/PoE)**  
 CFBUS.052

### Cable structure

(Electrical information please see next page)

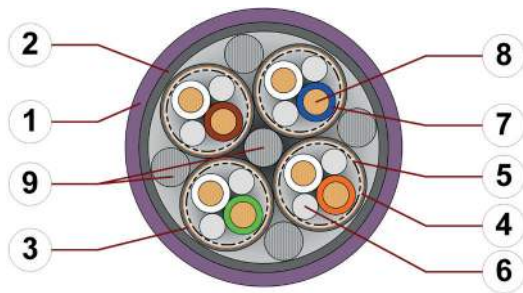

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Element shield: Extremely bending-resistant braiding made of tinned copper wires
4. Element banding: Several layer of fleece, wrapped in different directions
5. Element shield foil: Copper clad plastic foil
6. Filler: Plastic dummy
7. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
8. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
9. Strain relief: Tensile stress-resistant centre element

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.052	4x(2x0.15)C	white/blue, white/orange, white/green, white/brown	



Example image





# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### Ethernet (CAT7/PoE) CFBUS.052

### Electrical information

(Cable structure please see previous page)

<b>Part No.</b>	<b>CFBUS.052</b>
<b>Nominal voltage</b>	50 V 600 V (following UL)
<b>Testing voltage</b> (following DIN EN 50289-1-3)	500 V
<b>Characteristic wave impedance</b> (following DIN EN 50289-1-11)	100 ± 25 Ω
<b>Operating capacity</b> (following DIN EN 50289-1-5)	50 pF/m
<b>Nominal Velocity of Propagation (NVP)</b>	64 %

### Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz	200 MHz	300 MHz	400 MHz	500 MHz	600 MHz
CFBUS.052	3.0	5.7	8.9	11.2	12.6	15.8	22.5	28.7	41.4	51.4	60.1	67.9	75.2

Conductor nominal cross section [mm <sup>2</sup> ]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C (following DIN VDE 0298-4) [A]
0.15	133	2.5

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

Part No.	Bus type	Link class	Maximum transmission length
CFBUS.052	Ethernet/CAT7	Class F - (Data applications up to 600 MHz)	45 m



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### FireWire 400 (IEEE 1394a) CFBUS.055

#### Cable structure

(Electrical information please see next page)

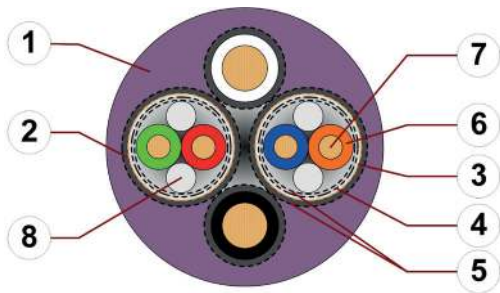

1. Outer jacket: Pressure extruded, gusset-filling, flame-retardant TPE mixture
2. Element shield: Extremely bending-resistant braiding made of tinned copper wires
3. Element shield foil: Copper clad plastic foil
4. Element banding: Two layer of gliding PTFE foil, wrapped in different directions
5. Element banding: Plastic foil
6. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
7. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires
8. Filler: Plastic dummy

#### Example image

For detailed overview please see design table

#### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.055	2x(2x0.15)C	orange/blue, green/red	
	2x(0.34)C	white, black	



Example image



# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### FireWire 400 (IEEE 1394a) CFBUS.055

#### Electrical information

(Cable structure please see previous page)

<b>Part No.</b>	<b>CFBUS.055</b>
<b>Nominal voltage</b>	50 V 600 V (following UL)
<b>Testing voltage</b> (following DIN EN 50289-1-3)	500 V
<b>Characteristic wave impedance</b> (following DIN EN 50289-1-11)	100 ± 15 Ω (1-250 MHz)
<b>Operating capacity</b> (following DIN EN 50289-1-5)	50 pF/m

#### Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz	155 MHz	200 MHz	250 MHz
CFBUS.055	3.4	6.4	9.9	12.5	14.1	17.7	25.5	32.9	41.8	48.1	54.5

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
0.15		132
0.34		58
		2.5
		7

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### Profinet (Type C) CFBUS.060

#### Cable structure

(Electrical information please see next page)

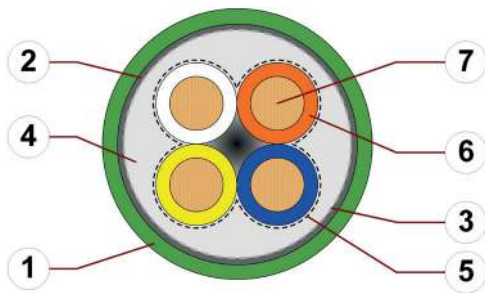

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Aluminium clad plastic foil
4. Inner jacket: Pressure extruded, gusset-filling TPE mixture
5. Banding: Plastic foil
6. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
7. Conductor: Fine-wire strand in especially bending-stable version consisting of bare copper wires

#### Example image

For detailed overview please see design table

#### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.060	4x0.38	white, orange, blue, yellow (Star-quad)	



Example image



# Data sheet

## chainflex® CFBUS



- Bus cable (Class 6.6.4.1)
- For extremely heavy duty applications
- TPE outer jacket
- Shielded
- Oil and bio-oil resistant
- Flame retardant
- Hydrolysis and microbe-resistant



Example image

### Profinet (Type C)

CFBUS.060

### Electrical information

(Cable structure please see previous page)

<b>Part No.</b>	<b>CFBUS.060</b>
<b>Nominal voltage</b>	50 V 600 V (following UL)
<b>Testing voltage</b> (following DIN EN 50289-1-3)	500 V
<b>Characteristic wave impedance</b> (following DIN EN 50289-1-11)	100 ± 10 Ω
<b>Operating capacity</b> (following DIN EN 50289-1-5)	50 pF/m
<b>Nominal Velocity of Propagation (NVP)</b>	66 %

Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	10 MHz	16 MHz	20 MHz	31.25 MHz	62.5 MHz	100 MHz
CFBUS.060	2.4	4.8	7.6	9.6	10.7	13.4	19.0	24.0

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
0.38	51	7

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

### USB 2.0

CFBUS.065-CFBUS.066

### Cable structure

(Electrical information please see next page)

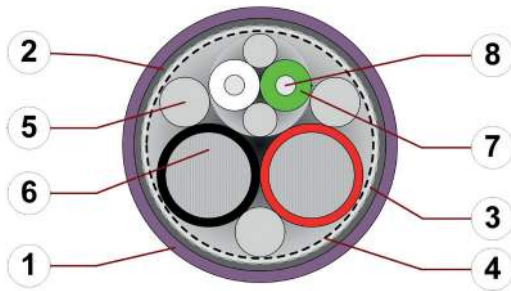

1. Outer jacket: Pressure extruded, flame-retardant TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Shield foil: Aluminium clad plastic foil
4. Banding: Plastic foil
5. Filler: Plastic yarns
6. Conductor: Fine-wire strand in especially bending-stable version consisting of tinned copper wires
7. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
8. Conductor: Fine-wire hybrid strand in especially bending-stable version consisting of silver-plated (.065.) or bare (.066) copper wires

### Example image

For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.065	(2xAWG28)	white/green	
	2xAWG20	red, black	
CFBUS.066	(2xAWG24)	white/green	
	2xAWG20	red, black	



Example image

igus® chainflex® CFBUS.049

# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



Example image

### USB 2.0

CFBUS.065-CFBUS.066

### Electrical information

(Cable structure please see previous page)

Part No.	CFBUS.065	CFBUS.066
Nominal voltage	50 V 30 V (following UL)	
Testing voltage (following DIN EN 50289-1-3)	500 V	
Characteristic wave impedance (following DIN EN 50289-1-11)	90 ± 15 Ω (at 100 MHz)	
Operating capacity (following DIN EN 50289-1-5)	50 pF/m	60 pF/m

### Line attenuation approx. [dB/100m]

Part No.	1 MHz	4 MHz	8 MHz	12 MHz	24 MHz	48 MHz	96 MHz	200 MHz	400 MHz
CFBUS.065	5.0	9.0	12.5	14.5	22.0	32.0	50.0	75.0	116.0
CFBUS.066	5.0	9.0	12.5	14.5	22.0	32.0	50.0	75.0	116.0

Conductor nominal cross section	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2)	Maximum current rating at 30 °C (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
AWG28	232	1
AWG24	81	5
AWG20	43	10

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



# Data sheet

## chainflex® CFBUS




Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant

DVI  
 CFBUS.070

### Cable structure

(Electrical information please see next page)

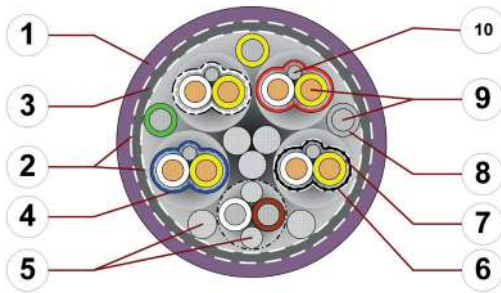

1. Outer jacket: Pressure extruded, halogen-free TPE mixture
2. Banding: Plastic fleece
3. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
4. Element jacket: Tube extruded TPE mixture
5. Filler: Cotton yarn
6. Element banding: Gliding special foil
7. Element shield foil: Aluminium clad plastic foil
8. Core insulation: Mechanically high quality TPE mixture (according to bus specification)
9. Conductor: Fine-wire strand in especially bending-stable version consisting of tinned or bare copper wires
10. Drain wire: Fine-wire strand consisting of tinned copper wires

Example image  
 For detailed overview please see design table

### Design table

Part No.	Core group	Colour code	Drawing
CFBUS.070	4x(2xAWG28)C	4 x white/yellow with element-shield in blue, black, red, white	
	(2xAWG28)	white/brown	
	3xAWG28	green, yellow, grey	



Example image





# Data sheet

## chainflex® CFBUS



Bus cable (Class 6.6.4.1) ● For extremely heavy duty applications ● TPE outer jacket  
 ● Shielded ● Oil and bio-oil resistant ● Flame retardant ● Hydrolysis and microbe-resistant



### DVI

CFBUS.070

### Electrical information

(Cable structure please see previous page)

<b>Part No.</b>	<b>CFBUS.070</b>
<b>Nominal voltage</b>	50 V
<b>Testing voltage</b> (following DIN EN 50289-1-3)	500 V
<b>Characteristic wave impedance</b> (following DIN EN 50289-1-11)	100 ± 10 Ω (at 100 MHz)
<b>Operating capacity</b> (following DIN EN 50289-1-5)	40 pF/m

<b>Conductor nominal cross section</b>	<b>Maximum conductor resistance at 20 °C</b> (following DIN EN 50289-1-2)	<b>Maximum current rating at 30 °C</b> (following DIN VDE 0298-4)
[mm <sup>2</sup> ]	[Ω/km]	[A]
AWG28	230	1

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image