

COIL: @ +25°C


RESISTANCE 218 Ω ±10%

NOMINAL VOLTAGE 12 VDC

MUST OPERATE 9.2 VDC

MUST RELEASE _____

CUSTOMER DATA SHEET

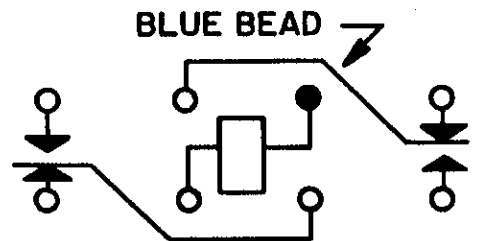

ENVIRONMENT:

VIBRATION _____ CPS TO _____ CPS @ _____ g's

SHOCK _____ g's _____ MS. DURATION

TEMPERATURE -45 °C TO +70 °C

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

NOTES: OPERATE 5MS MAX

RELEASE 3MS MAX

500VAC DIELECTRIC ALL POINTS

DR. R.B. 4-1-91 CK. A/1/91 JMB



Communications
Instruments, Inc.

CUST. P & B

CUST. NO. HP-11D-12

TYPE "HFW" RELAY

HFW1201S139