


STRAIGHT PLUG CLAMP TYPE CABLE 2/50 D	R114.003.420 SERIES SMB
--	-----------------------------------

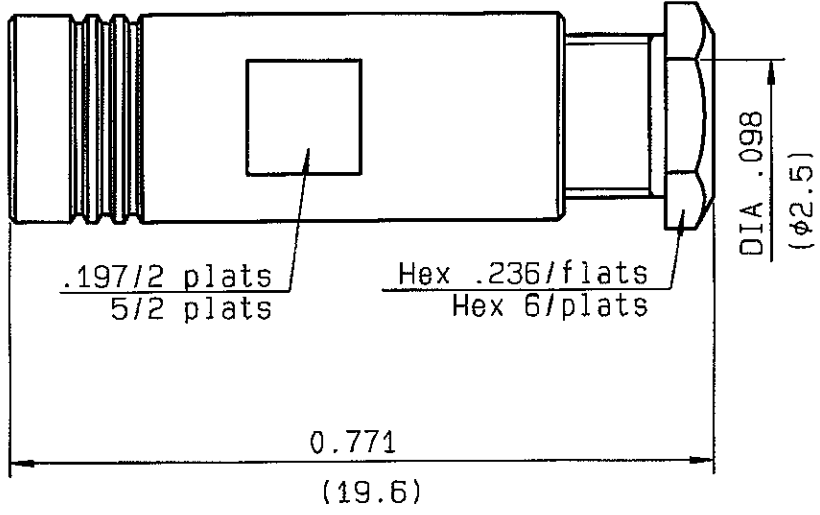

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-4 GHz
TEMPERATURE RATING	-65/+165 °C
V.S.W.R	1.30 + .04 x F(GHz)Maxi
RF INSERTION LOSS	0.25 \sqrt{F} (GHz) dB Maxi
VOLTAGE RATING	250 Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	750 Veff Mini
INSULATION RESISTANCE	1000 M Ω Mini
HERMETIC SEAL	NA Atm.cm ³ /s
LEAKAGE (pressurized only)	NA
MECHANICAL DURABILITY	500 Cycles
WEIGHT	gr
SPECIFICATION	

CABLES : TS 2619

PACKAGING		
Standard	Unit	Other
100	'W' option	Contact us

OTHERS CHARACTERISTICS

	R-A-S
CABLE RETENTION	58 N Mini
CENTER CONTACT RETENTION	
Axial force - mating end	10 N Mini
Axial force - opposite end	10 N Mini
Torque	NA cm.N Mini
RECOMMENDED TORQUES	
Mating	NA cm.N
Panel nut	NA cm.N
Clamp nut	40 cm.N

CONNECTOR PARTS:	MATERIALS	FINISH
		(all values are given in micrometers)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
OUTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
INSULATOR	PTFE	-
GASKET		-
OTHERS PIECES	BRASS	GOLD 0.2 OVER NICKEL 2

TRIPPIER

ISSUE 0701 E	CREATION DATE 20/05/1992	FILE PART-NUMBER 91-0019-003
------------------------	------------------------------------	--



The information given here is subject to change without notice. Design changes may be in order to improve the product.

Connect to the future

