
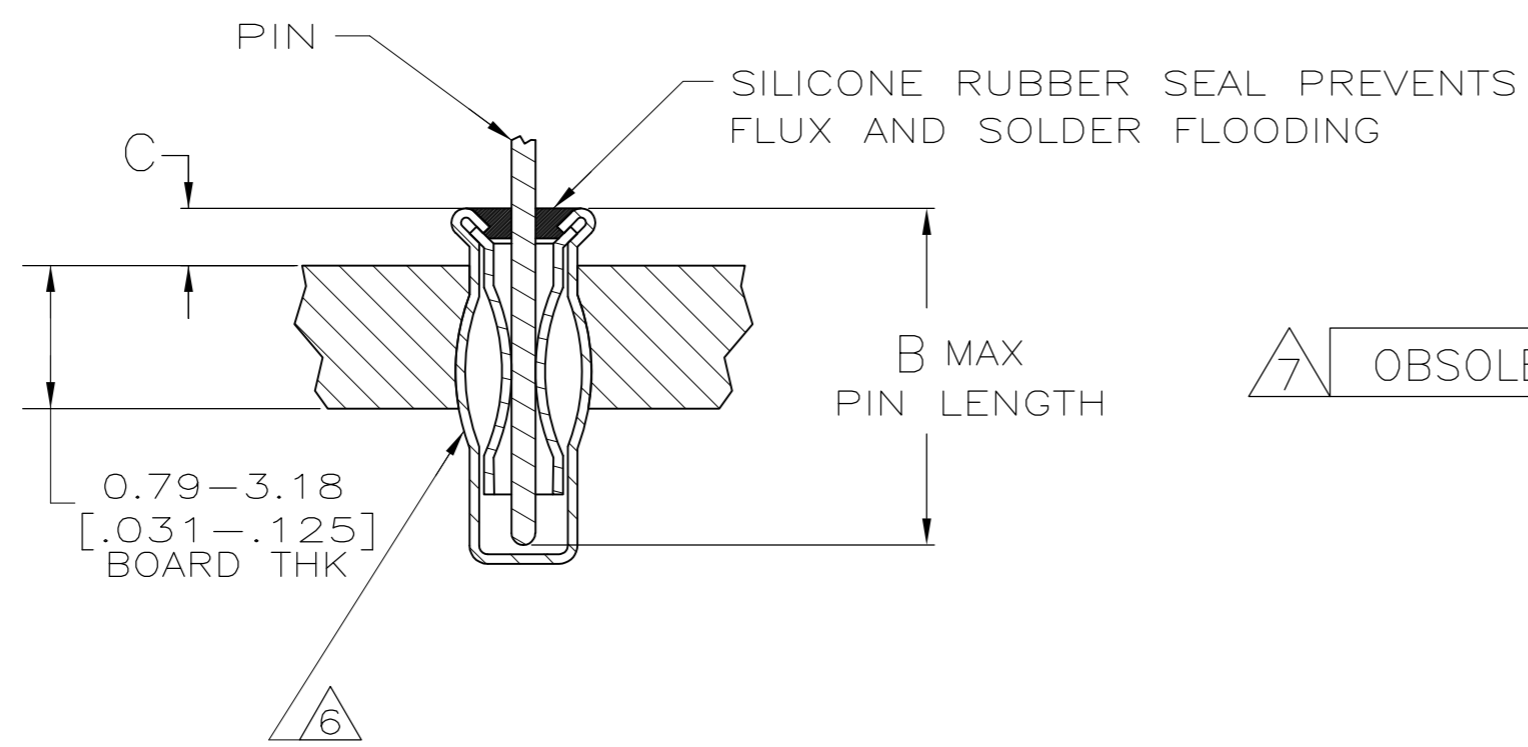
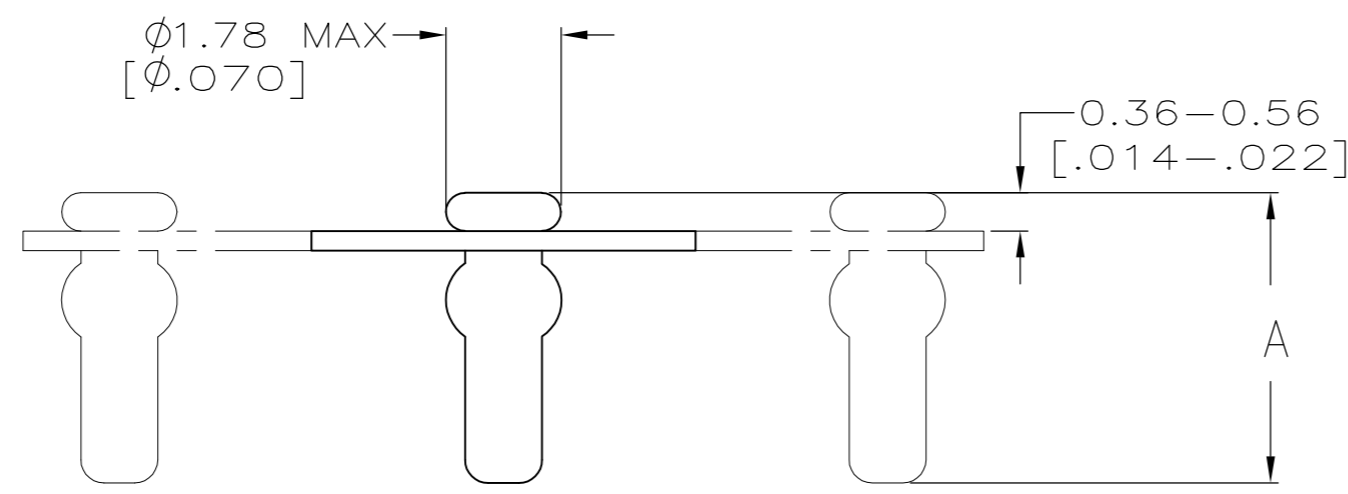


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AG	53	0	RELEASED	26JAN06	JDP JGH
		01	REVISED PER ECO-09-024606	03NOV09	KK AEG

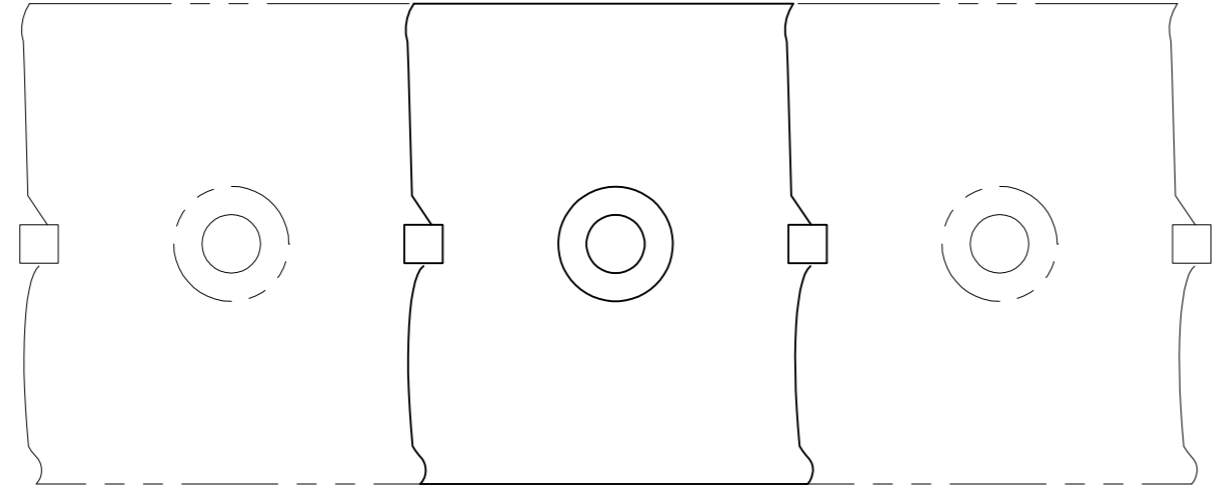

- 1 MATERIAL:  
 EYELET- COPPER PER ASTM B 152  
 SPRING- BERYLLIUM-COPPER PER ASTM B 194  
 SEALANT- SILICONE RUBBER, RTV 738.
- 2 TIN PLATE PER ASTM B 545, 0.00254 [.000100] MINIMUM THICKNESS.
- 3 GOLD PLATE PER ASTM B 488, 0.00076 [.000030] MINIMUM THICKNESS.
- 4. PACKAGE 50,000 PER REEL.
- 5 TO ENSURE 1/2 OZ MIN RETENTION, DO NOT EXCEED 0.05 [.002] DIFFERENCE IN PIN DIA WHEN CHANGING TO A SMALLER DIA PIN.
- 6 PRODUCT IS OVALIZED FOR RETENTION IN THE P.C. BOARD. THE RECOMMENDED HOLE DIAMETER IS Ø1.32 [Ø.052] MINIMUM, +0.08 [.003] MAX. PRIOR TO SOLDERING.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7	OBSOLETE	.056-1.14	3.40	3.51	Ø0.56-Ø0.64	3	2	5645899-8-	
		[.022-.045]	[.134]	[.138]	[Ø.022-Ø.025]	3	2	5645899-5	
		.056-2.54	6.50	6.60	Ø0.46-Ø0.64	3	2	5645899-5	
		[.022-.100]	[.256]	[.260]	[Ø.018-Ø.025]	3	2	5645899-5	
C	DIM	B	DIM	A	DIM	PIN DIA	5	SPRING EYELET FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.20[.008] 4 PLC ± - ANGLES ± - FINISH SEE TABLE	DWN J. POLIGNONE 26JAN06 CHK J. HAVENER 26JAN06 APVD J. HAVENER 26JAN06 PRODUCT SPEC 108-14008 APPLICATION SPEC 114-26004 WEIGHT - CUSTOMER DRAWING	Tyco Electronics Corporation Harrisburg, PA 17105-3608 NAME MINIATURE SPRING SOCKET ASSY SERIES 2 SIZE A2 CAGE CODE 00779 DRAWING NO C=5645899 RESTRICTED TO - SCALE 10:1 SHEET 1 OF 1 REV 01
----------------------------	--	---	---