


## Ultra High-Precision Foil Wraparound Surface Mount Chip Resistor

with Gold Plated Terminals for High Temperature Applications up to +225°C

### FEATURES

- Temperature coefficient of resistance (TCR): 2.5 ppm/°C max (-55°C to +200°C, +25°C ref.)
- Resistance range: 10 Ω to 125 kΩ (for higher and lower values, please contact us)
- Resistance tolerance: to ±0.01%
- **Working power<sup>(1)</sup>:**
  - to 750 mW at +70°C
  - to 300 mW at +200°C
- **Long-term stability: 0.1% at +225 °C for 1000 h, no power**
- **Load-life stability: ±0.1% at 200°C for 2000 h, at working power**
- Bulk Metal Foil resistors are not restricted to standard values; we can supply specific “as required” values at no extra cost or delivery (e.g., 1K2345 vs. 1K)
- Thermal stabilization time <1 s (nominal value achieved within 10 ppm of steady state value)
- Electrostatic discharge (ESD) at least to 25 kV
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise: 0.010 μV<sub>RMS</sub>/V of applied voltage (<-40 dB)
- Voltage coefficient: 0.1 ppm/V
- Non-inductive: <0.08 μH
- Non hot spot design
- Terminal finish: soft gold plating
- For sample prototype quantities, please contact [foil@vpgsensors.com](mailto:foil@vpgsensors.com).

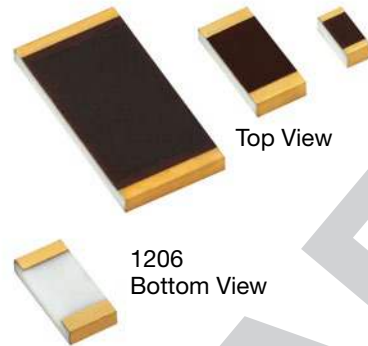

RoHS Available

### INTRODUCTION

Vishay Foil Resistors (VFR) introduces a new line of Ultra Precision Bulk Metal<sup>®</sup> Z1 Foil Technology: wraparound surface mount chip resistors with gold-plated terminals for high temperature up to +225°C<sup>(1)</sup> (working power: to 300 mW at +200°C).

The FRSG series incorporates Z1 Foil Technology to extend its critical performance features to high-temperature environments, while maintaining the same low TCR. The gold-plated terminals support the use of popular mounting methods used in the industry, therefore, facilitating any design considerations required.

The FRSG is available in any value within the specified resistance range. VFR's application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact [foil@vpgsensors.com](mailto:foil@vpgsensors.com).

**Table 1 – Tolerance and TCR vs. Resistance Value<sup>(1)</sup> (-55°C to +200°C, +25°C Ref.)**

| Resistance Value (Ω) | Tolerance (%) | Max TCR (ppm/°C) |
|----------------------|---------------|------------------|
| 250 to 125k          | ±0.01%        | ±2.5             |
| 100 to <250          | ±0.02%        |                  |
| 50 to <100           | ±0.05%        |                  |
| 25 to <50            | ±0.1%         |                  |
| 10 to <25            | ±0.25%        |                  |


**Table 2 – Specifications**

| Chip Size | Rated Power at +70°C (mW) | Working Power at +200°C (mW) | Resistance Range (Ω) |
|-----------|---------------------------|------------------------------|----------------------|
|           | FR4 PCB                   | Ceramic PCB                  |                      |
| 0603      | 100                       | 33                           | 100 to 4k            |
| 0805      | 200                       | 83                           | 10 to 8k             |
| 1206      | 300                       | 140                          | 10 to 25k            |
| 1506      | 350                       | 167                          | 10 to 30k            |
| 2010      | 500                       | 220                          | 10 to 70k            |
| 2512      | 750                       | 300                          | 10 to 125k           |


#### Note

<sup>(1)</sup> Performances obtained with ceramic PCB.

**Figure 1 – Power Derating Curve**

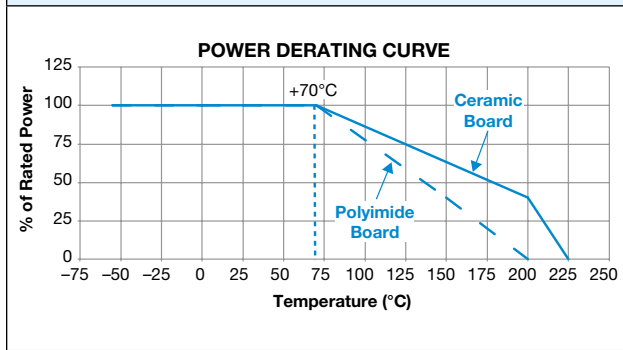

**Figure 2 – Trimming to Values**  
 (conceptual illustration)

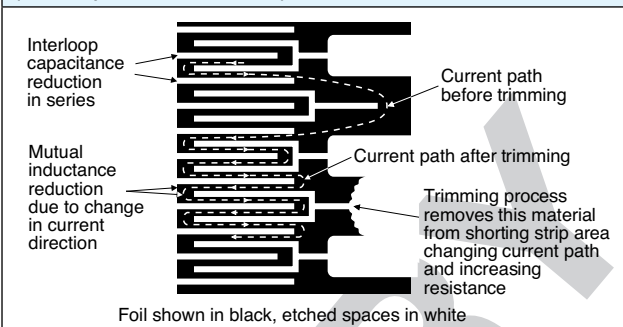

**Note**

To acquire a precision resistance value, the Bulk Metal Foil chip is trimmed by selectively removing built-in “shorting bars.” To increase the resistance in known increments, marked areas are cut, producing progressively smaller increases in resistance. This method reduces the effect of “hot spots” and improves the long-term stability of VFR resistors.

**Table 3 – Dimensions and Land Pattern in Inches (Millimeters)**

| Chip Size | L<br>±0.005 (0.13) | W<br>±0.005 (0.13) | Thickness Maximum | D<br>±0.005 (0.13) |
|-----------|--------------------|--------------------|-------------------|--------------------|
| 0603      | 0.063 (1.60)       | 0.032 (0.81)       | 0.025 (0.64)      | 0.011 (0.28)       |
| 0805      | 0.080 (2.03)       | 0.050 (1.27)       |                   | 0.015 (0.38)       |
| 1206      | 0.126 (3.20)       | 0.062 (1.57)       |                   | 0.020 (0.51)       |
| 1506      | 0.150 (3.81)       | 0.062 (1.57)       |                   | 0.020 (0.51)       |
| 2010      | 0.198 (5.03)       | 0.097 (2.46)       |                   | 0.025 (0.64)       |
| 2512      | 0.249 (6.32)       | 0.127 (3.23)       |                   | 0.032 (0.81)       |

**Table 4 – Performances<sup>(1)</sup>**


| Test or Conditions   | ΔR Limits of FRSG Series <sup>(2)</sup> (Typical) |
|--|---|
| Thermal shock, 5 x (–65°C to +200°C)   | ±0.05% (500 ppm)                                  |
| Low temperature operation, –65°C, 45 min at rated power                              | ±0.01% (100 ppm)                                  |
| Moisture resistance  | ±0.02% (200 ppm)                                  |
| Load-life stability, +200°C for 2000 h at working power on ceramic PCB (see Table 2) | ±0.1% (1000 ppm)                                  |
| Load-life stability, +70°C for 2000h at rated power on FR4 PCB (see Table 2)         | 0.01% (100 ppm)                                   |
| Long-term stability (high-temperature exposure), +225°C for 1000 h, no power         | ±0.1% (1000 ppm)                                  |

**Note**

- <sup>(1)</sup> As shown + 0.01 Ω to allow for measurement errors at low values.
- <sup>(2)</sup> Performances obtained with ceramic PCB.

Figure 3—Global Part Number Information<sup>(1)</sup>

NEW GLOBAL PART NUMBER: Y408412K7560Q9R (preferred part number format)

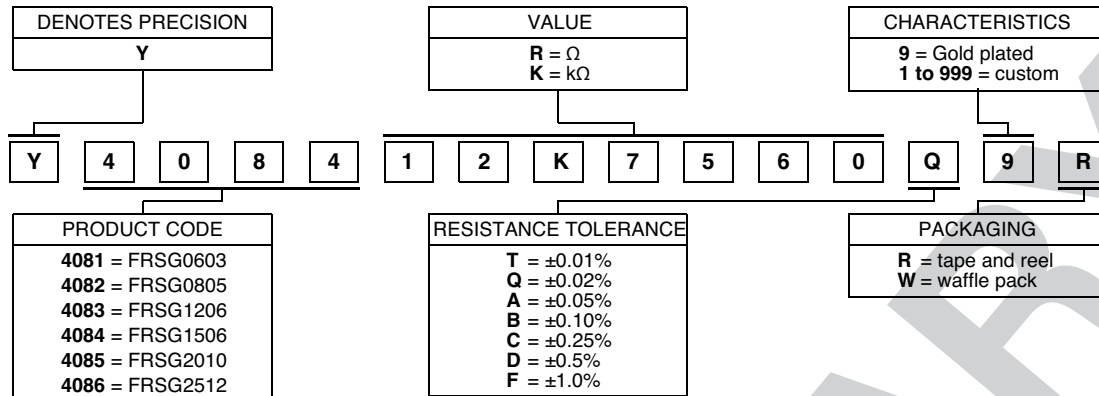

FOR EXAMPLE: ABOVE GLOBAL ORDER Y4084 12K7560 Q 9 R:

TYPE: FRSG1506  
VALUES: 12.7560 kΩ  
ABSOLUTE TOLERANCE: 0.02%  
TERMINATION: Gold plated  
PACKAGING: tape and reel

HISTORICAL PART NUMBER: FRSG1506 12K756 TCR2.5 Q B T (will continue to be used)

| FRSG1506   | 12K756           | TCR2.5              | Q  | B               | T                                    |
|--|------------------|---------------------|--|-----------------|--------------------------------------|
| MODEL  | RESISTANCE VALUE | TCR CHARACTERISTICS | TOLERANCE  | TERMINATION     | PACKAGING                            |
| FRSG 0603<br>FRSG 0805<br>FRSG 1206<br>FRSG 1506<br>FRSG 2010<br>FRSG 2512 | 12.756 kΩ        |                     | T = ±0.01%<br>Q = ±0.02%<br>A = ±0.05%<br>B = ±0.10%<br>C = ±0.25%<br>D = ±0.5%<br>F = ±1.0% | B = Gold plated | T = tape and reel<br>W = waffle pack |

**Note**

<sup>(1)</sup> For non-standard requests, please contact application engineering.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.