


## CUSTOMER DRAWING

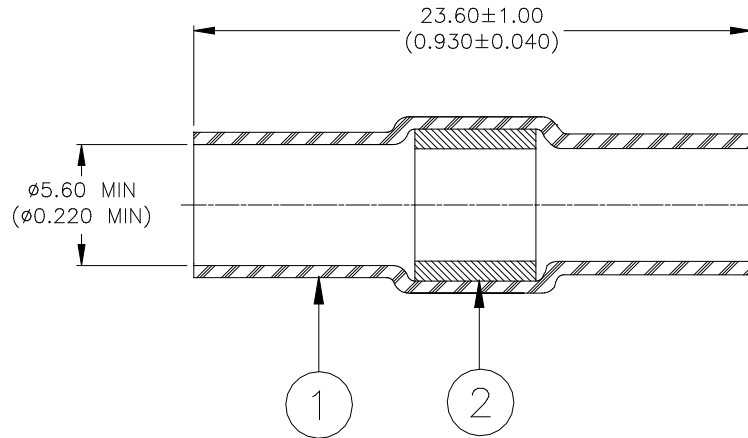


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
  - SOLDER: TYPE Sn63 per ANSI-J-STD-006.
  - FLUX: TYPE ROL0 per ANSI-J-STD-004.

### APPLICATION

1. This part is designed for use in attaching the shield of a cable to the tabs of a Raychem shield buss strip.

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		<b>Wire and Harnessing Products</b>	TITLE : <b>SOLDERSLEEVE SHIELD TERMINATOR</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: <b>D-110-0183</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	Revision: 2		Issue Date: March 2020	
DRAWN BY: M. FORONDA	DATE: 04-Apr.-01	ECO: ECO-20-003569	SCALE: None	SIZE: A	SHEET: 1 of 1	

Print Date: 17-Mar-20 If this document is printed it becomes uncontrolled. Check for the latest revision.