# T4112011041-000 - ACTIVE

## M12 Connector

TE Internal #: T4112011041-000 Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Brass, A Polarization Code, M12 Connector

## View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Wire-to-Wire

Number of Positions: 4

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 4A

# Features



## Product Type Features

Prewired	No	
Product Type	Connector Assembly	
Accessory Color	Black	
Assembly Type	Electrical Connector	
Connector System	Wire-to-Wire	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Circular Connector Type	Receptacle	
Shell Type	Metal	
Configuration Features		
Keying & Polarized Position Locations	A	
Factory Installed Backshell	With	
Keying	A	
Number of Positions	4	

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Brass, A Polarization Code, M12 Connector



Number of Power Positions	0	
Number of Signal Positions	4	
Contacts Preloaded	Yes	
Electrical Characteristics		
Operating Voltage	250 VAC	
Voltage	250 Vrms	
Body Features		
Peripheral Seal Material	Silicone	
Environmental Protection	IP67	
O-Ring Material	Silicone	
Environmental Protection Type	Elastomer Sealed	
Shell Plating Material	Nickel	
Shell Base Material	Brass	
Circular Connector Insulation Material Type	Polyamide 66 GF25	
Contact Features		
Contact Current Rating (Max)	4 A	
Reverse Gender	No	
Circular Connector Contact Type	Socket	
Mechanical Attachment		
Mating Retention Type	Threaded Coupling	
Mating Alignment	With	
Polarization Code	A	
Mating Alignment Type	Keyed	
Housing Features		
Circular Connector Shell Size	20	
Dimensions		
Wire Size	.82 – .2 mm²	
Usage Conditions		
IP Dust Sealing Level	6	
IP Water Sealing Level	IP67	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]	
Operation/Application		

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Brass, A Polarization Code, M12 Connector



Durability Rating	100 Cycles	
Circuit Application	Signal	
Shielded	Yes	
Industry Standards		
UL Flammability Rating	UL 94HB	
Other		
Position Locations Omitted	0	
Field Serviceable	Yes	
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold:	

### Halogen Content

## Solder Process Capability

## Pb (4% in Component Part)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

**C** For support call+1 800 522 6752


Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Brass, A Polarization Code, M12 Connector





TE Part # T4113011041-000 M12 M, 4P GOLD A\_CODE RA SHIELDED PG7

# Also in the Series M12 Connector

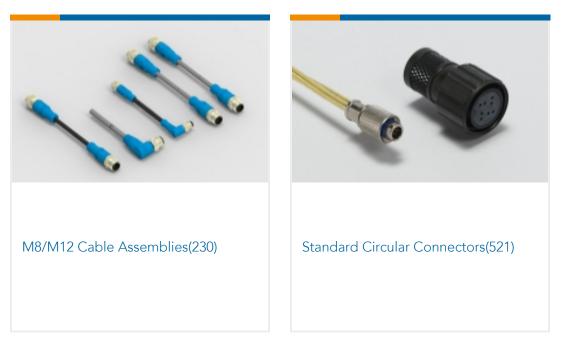

# Customers Also Bought



TE Part #DTM04-3P-E003 REC, 3P, GRY, N, CAP	TE Part #2176071-1 3521 130K 1% 2W	TE Part #993850-000 AD-1319-9	TE Part #806677-000 214A032-25-0
STE TE			
TE Part #T4112012041-000 M12 F, 4P GOLD A_CODE RA SHIELDED PG9	TE Part #823811-000 562A022-25-0	TE Part #5-1437657-7 8PCV-02-006=#8 TRIBARRIER TERM	TE Part #6-1437657-9 8PCV-03-006=#8 TRIBARRIER

TE Part #MC306E2-C-19-5SN

PLUG ASSY

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Brass, A Polarization Code, M12 Connector



# Documents

Product Drawings M12 F, 4P GOLD A\_CODE RA SHIELDED PG7

English

## **CAD** Files

Customer View Model ENG\_CVM\_CVM\_T4112011041-000\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4112011041-000\_B.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4112011041-000\_B.2d\_dxf.zip

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages

M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

Product Specifications Application Specification

English

Agency Approvals UL

English