

## Sensor/Actuator cable - SAC-4P-M12Y/2X 1,0-PUR/M12FSVP - 1696374

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 4-position, PUR halogen-free, Black-gray RAL 7021, Plug straight M12, A-coded, on Socket straight M12, A-coded, Cable length: 1 m



### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 1      |
| Weight per Piece (excluding packing) | 91.3 GRM |
| Custom tariff number                 | 85444290 |
| Country of origin                    | Poland   |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 1 m |
|-----------------|-----|

#### Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP65 |
|                      | IP67 |
|                      | IP68 |

#### General

|                        |              |
|------------------------|--------------|
| Rated current at 40°C  | 4 A          |
| Rated voltage          | 250 V        |
| Number of positions    | 4            |
| Contact resistance     | ≤ 5 mΩ       |
| Insulation resistance  | ≥ 100 MΩ     |
| Coding                 | A - standard |
| Status display         | No           |
| Surge voltage category | II           |
| Pollution degree       | 3            |

## Sensor/Actuator cable - SAC-4P-M12Y/2X 1,0-PUR/M12FSVP - 1696374

### Technical data

#### General

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

#### Material

|   |   |
|---|---|
| Inflammability class according to UL 94 | HB  |
| Contact material                        | CuSn  |
| Contact surface material                | Ni/Au                                       |
| Contact carrier material                | TPU GF                                      |
| Material of grip body                   | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                        | Zinc die-cast, nickel-plated                |
| Sealing material                        | NBR   |

#### Cable

|   |                            |
|---|----------------------------|
| Cable type                                      | PUR halogen-free black     |
| Cable type (abbreviation)                       | PUR                        |
| Cable abbreviation                              | Li9Y11Y-HF                 |
| UL AWM style                                    | 20549 / 10493 (80°C/300 V) |
| Conductor cross section                         | 4x 0.34 mm <sup>2</sup>    |
| AWG signal line                                 | 22                         |
| Conductor structure signal line                 | 42x 0.10 mm                |
| Core diameter including insulation              | 1.27 mm ±0.02 mm           |
| Thickness, insulation                           | ≥ 0.21 mm                  |
| Wire colors                                     | brown, white, blue, black  |
| Overall twist                                   | 4 wires, twisted           |
| External sheath, color                          | Black-gray RAL 7021        |
| Outer sheath thickness                          | approx. 0.8 mm             |
| External cable diameter D                       | 4.7 mm ±0.15 mm            |
| Minimum bending radius, fixed installation      | 5 x D                      |
| Minimum bending radius, flexible installation   | 10 x D                     |
| Number of bending cycles                        | 4000000                    |
| Minimum bending radius, drag chain applications | 10 x D                     |
| Traversing path                                 | 10 m                       |
| Traversing rate                                 | 3 m/s                      |
| Acceleration                                    | 10 m/s <sup>2</sup>        |
| Cable weight                                    | 30 kg/km                   |
| Outer sheath, material                          | PUR                        |
| Material conductor insulation                   | PP                         |
| Conductor material                              | Bare Cu litz wires         |
| Insulation resistance                           | ≥ 1 GΩ*km                  |

## Sensor/Actuator cable - SAC-4P-M12Y/2X 1,0-PUR/M12FSVP - 1696374

### Technical data

#### Cable

|                                 |   |
|---------------------------------|---|
| Conductor resistance            | ≤ 58 Ω/km   |
| Nominal voltage, cable          | ≤ 300 V   |
| Test voltage, cable             | ≥ 3000 V  |
| Special properties              | Flexible cable conduit capable                                      |
|                                 | Silicone-free   |
|                                 | Free of substances which would hinder coating with paint or varnish |
|                                 | Flexible  |
| Flame resistance                | in accordance with DIN UL-Style 20549                               |
|                                 | in accordance with FT1 as per UL 758                                |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                            |
|                                 | in accordance with DIN EN 50267-2-1                                 |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | hydrolysis and microbe resistant                                    |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
|                                 | Low adhesion  |
|                                 | abrasion-resistant  |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (cable, flexible installation)                     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

# Sensor/Actuator cable - SAC-4P-M12Y/2X 1,0-PUR/M12FSVP - 1696374

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

## Approvals

### Approvals

---

#### Approvals

UL Listed / cUL Listed / cULus Listed

---


#### Ex Approvals


---

Approvals submitted

---

## Approval details

|   |       |
|---|-------|
| UL Listed  |       |
| Nominal current IN  | 4 A   |
| Nominal voltage UN  | 300 V |

|  |       |
|--|-------|
| cUL Listed  |       |
| Nominal current IN   | 4 A   |
| Nominal voltage UN   | 300 V |


# Sensor/Actuator cable - SAC-4P-M12Y/2X 1,0-PUR/M12FSVP - 1696374

## Approvals




## Drawings

Schematic diagram




Pin assignment M12 plug, 4-pos., A-coded, view plug side

Schematic diagram




Pin assignment M12 socket, 4-pos., A-coded, view female side

Cable cross section




PUR halogen-free black [PUR]

Dimensioned drawing

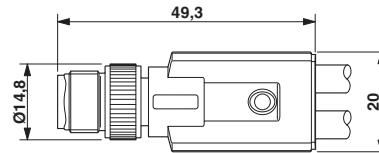

Plug M12 x 1, Y distributor

Dimensioned drawing

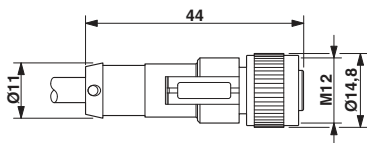

M12 x 1 socket, straight

Circuit diagram

