




SECTION A-A
SCALE 8:1



SECTION B-B
SCALE 8:1
14 AWG WIRE



SECTION B-B
SCALE 8:1
18-16 AWG WIRE

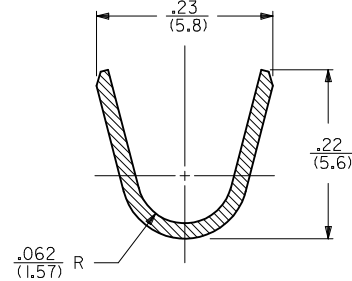


SECTION C-C
SCALE 8:1

NOTES:


1. THIS GROUND CLIP CRIMPS TO #14- #18 AWG WIRE WITH .031/(.79) THICK INSULATION, SEE CHART, AND IS INTENDED FOR USE ONLY AS A SECONDARY GROUND.

MATERIAL:


STEEL, STAINLESS, TYPE 301,
.020/(.51) THICK.



CARRIER VIEW

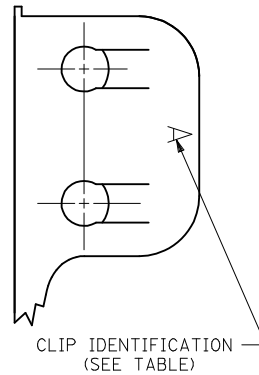


CLIP IDENTIFICATION
(SEE TABLE)

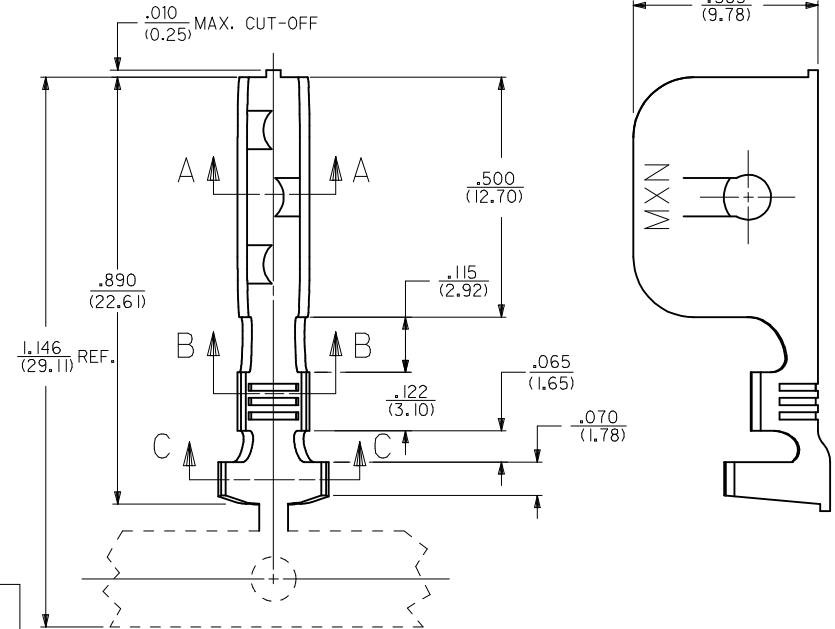


040-06-2015	42172-BBI	.025/(0.64)	.17/(4.3)	.035/(0.89)-.050/(1.27)	14 AWG	(2) #16 AWG
040-06-2014	42172-AAI	.008/(0.20)	.15/(3.8)	.015/(0.38)-.035/(0.89)	14 AWG	
050-29-1597	42172-HI	.035/(0.89)	.17/(4.3)	.045/(1.14)-.060/(1.52)	18-16 AWG	
040-06-2017	42172-FI	.015/(0.38)	.15/(3.8)	.020/(0.51)-.030/(0.76)	18-16 AWG	
040-06-2013	42172-CI	.050/(1.27)	.17/(4.3)	.060/(1.52)-.075/(1.91)	18-16 AWG	(2) #18 AWG OR (1) #18 & (1) #16
040-06-2005	42172-BI	.025/(0.64)	.17/(4.3)	.035/(0.89)-.050/(1.27)	18-16 AWG	
040-06-2003	42172-AI	.008/(0.20)	.15/(3.8)	.015/(0.38)-.035/(0.89)	18-16 AWG	
040-06-2024	42172-GI	.004/(0.10)	.15/(3.8)	.015/(0.38)-.035/(0.89)	18-16 AWG	
PART NO.	ENG. NO.	DIM. "D"	DIM. "E"	PANEL THICKNESS RANGE	WIRE GAGE	DOUBLE WIRE COMBINATION


MOVE DIM E EC NO: UCP2015-5495 DRWN: JNONT CHKD: JNONT APPR: FSLTH	REV R3	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± .010 3 PLACES ± .010 2 PLACES ± .010 1 PLACE ± .010 0 PLACE ± .010 ANGULAR ± 1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE IN/MM DRAWN BY MAB CHECKED BY KBP APPROVED BY RAS DATE 07-24-92 DATE 07-24-92 DATE 07-24-92	SCALE 5:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE GROUND CLIP	molex	DOCUMENT NO. SD-42172-***	SHEET NO. 1 OF 1

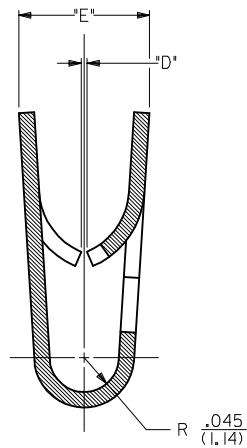


SECTION A-A
SCALE 8:1



SECTION B-B
SCALE 8:1
14 AWG WIRE



SECTION B-B
SCALE 8:1
18-16 AWG WIRE

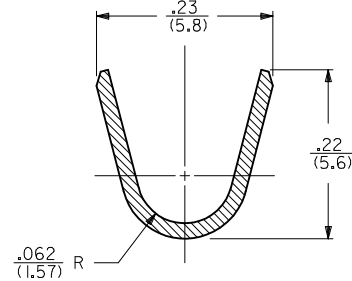


SECTION C-C
SCALE 8:1

NOTES:


1. THIS GROUND CLIP CRIMPS TO #14- #18 AWG WIRE WITH .031/(.79) THICK INSULATION, SEE CHART, AND IS INTENDED FOR USE ONLY AS A SECONDARY GROUND.

MATERIAL:


STEEL, STAINLESS, TYPE 301,
.020/(.51) THICK.



CARRIER VIEW

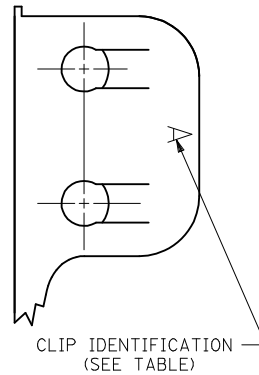

CLIP IDENTIFICATION
(SEE TABLE)

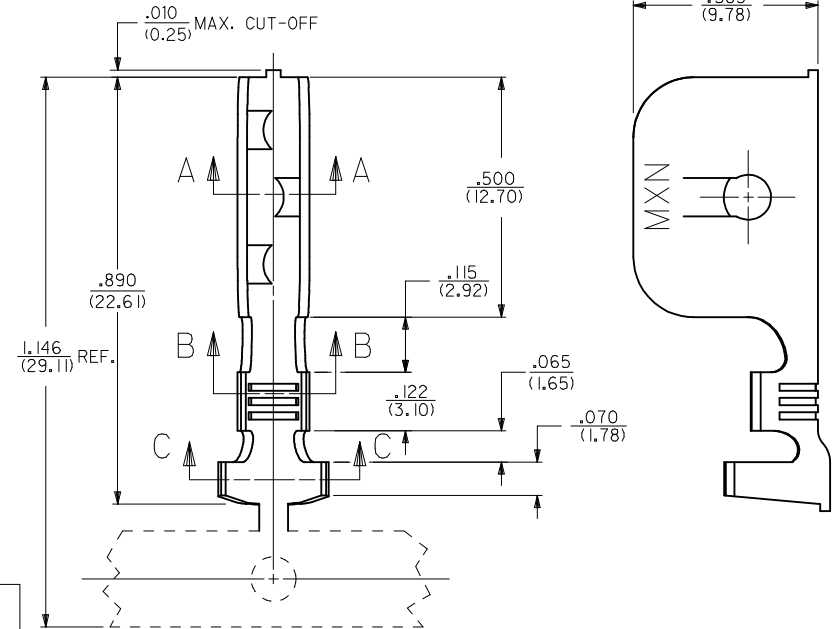

040-06-2015	42172-BBI	.025/(0.64)	.17/(4.3)	.035/(0.89)-.050/(1.27)	14 AWG	(2) #16 AWG
040-06-2014	42172-AAI	.008/(0.20)	.15/(3.8)	.015/(0.38)-.035/(0.89)	14 AWG	
050-29-1597	42172-HI	.035/(0.89)	.17/(4.3)	.045/(1.14)-.060/(1.52)	18-16 AWG	
040-06-2017	42172-FI	.015/(0.38)	.15/(3.8)	.020/(0.51)-.030/(0.76)	18-16 AWG	
040-06-2013	42172-CI	.050/(1.27)	.17/(4.3)	.060/(1.52)-.075/(1.91)	18-16 AWG	(2) #18 AWG OR (1) #18 & (1) #16
040-06-2005	42172-BI	.025/(0.64)	.17/(4.3)	.035/(0.89)-.050/(1.27)	18-16 AWG	
040-06-2003	42172-AI	.008/(0.20)	.15/(3.8)	.015/(0.38)-.035/(0.89)	18-16 AWG	
040-06-2024	42172-GI	.004/(0.10)	.15/(3.8)	.015/(0.38)-.035/(0.89)	18-16 AWG	
PART NO.	ENG. NO.	DIM. "D"	DIM. "E"	PANEL THICKNESS RANGE	WIRE GAGE	DOUBLE WIRE COMBINATION

MOVE DIM E EC NO: UCP2015-5495 DRWN: JNONT CHKD: JMK/PPR APPR: FSM/TH REV R3	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± .014 0 PLACE ± ± ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE IN/MM DRAWN BY DATE MAB 07-24-92 CHECKED BY DATE KBP 07-24-92 APPROVED BY DATE RAS 07-24-92 MATERIAL NO. SEE CHART DOCUMENT NO. SD-42172-*** SHEET NO. 1 OF 1	SCALE 5:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION GROUND CLIP molex THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION