




TOP VIEW





SIDE VIEW

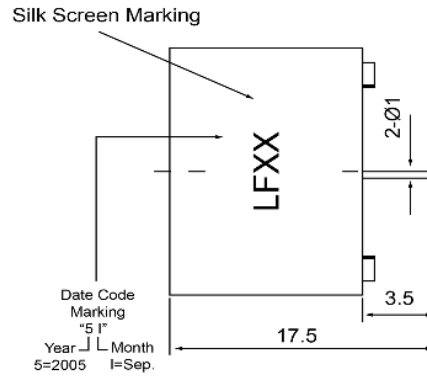

BOTTOM VIEW



Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S		
Resonant Frequency	400	(Hz)								
Rated Voltage	9	(V)								
SPL @ 10cm	75	(dBA)								
Tone	Single Tone									
Mount Type	Thru Hole									
Voltage Range	6 ~ 12	(V)								
Max Rated Current	25	(mA)								
Housing Material	ABS									
Operating Temperature	-10 ~ +60	°C								
Storage Temperature	-20 ~ +70	°C								
Weight	10	(g)								
 DB UNLIMITED			 DB UNLIMITED			Electro-Mechanical Indicator		IE220409-1		
						Electro-Mechanical Indicator		IE220409-1		
Drawn by		Date	Checked by		Date	Approved by		Date		
A.B.		10/21/2013	C.E.		10/21/2013	J.S		10/21/2013		

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.