

SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652

<https://www.phoenixcontact.com/us/products/1423652>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position halogen-free, shielded (Advanced Shielding Technology), Plug straight M12, coding: S, on Socket straight M12, coding: S, cable length: 4 m, for AC current up to 12 A/690 V

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Protection against incorrect connection using special S-coding
- Shield power reliably – 360° shielding to reduce electromagnetic loads
- Our standard: robust halogen-free PUR cable

Commercial data

Item number	1423652
Packing unit	1 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	BF05
Product key	BF1CCP
GTIN	4055626353043
Weight per piece (including packing)	633 g
Weight per piece (excluding packing)	633 g
Customs tariff number	85444290
Country of origin	PL

1423652

<https://www.phoenixcontact.com/us/products/1423652>

Technical data

Product properties

Product type	Power cable
Number of positions	4
Application	Power supply
No. of cable outlets	1
Shielded	yes
Coding	S

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	690 V AC
Nominal current I_N	12 A
Protective circuit	unwired

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Type	Plug straight M12
Coding type	S (Power)

Connection 2

Type	Socket straight M12
Coding type	S (Power)

Cable/line

Cable length	4 m
--------------	-----


SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652

<https://www.phoenixcontact.com/us/products/1423652>

PUR halogen-free orange shielded [PUR]

Dimensional drawing	
UL AWM Style	20234 / 10492 (80°C/1000 V)
Number of positions	4
Shielded	yes
Cable type	PUR halogen-free orange shielded [PUR]
Conductor cross section	4x 1.5 mm ²
Wire diameter incl. insulation	≤ 2.5 mm
External cable diameter	9.7 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	orange RAL 2003
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, green/yellow
Thickness, insulation	0.4 mm
Thickness, outer sheath	1.2 mm
Overall twist	4 wires optimally twisted
Max. conductor resistance	≤ 13.3 Ω/km (at 20 °C)
Insulation resistance	≥ 10 MΩ*km (at 20 °C)
Nominal voltage, cable	1000 V AC
Test voltage	4260 V AC (5 min.)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	7.5 x D
Max. bending cycles	4000000
Torsion force	± 25 °/m
Halogen-free	according to VDE 0282-13 Appendix C
Flame resistance	in accordance with EN 60332-1-2 in acc. to UL 1581 VW1 According to CSA C 22.2 No. 210-05 FT1
Resistance to oil	in accordance with DIN EN 60811-2-1 According to DIN EN 50363-10-2
Other resistance	UV resistant Low adhesion
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -30 °C ... 90 °C (Cable, flexible installation)

SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652

<https://www.phoenixcontact.com/us/products/1423652>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67 (without preloading, as additional test in accordance with IEC 60529)
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111

1423652

<https://www.phoenixcontact.com/us/products/1423652>


Drawings

Schematic diagram

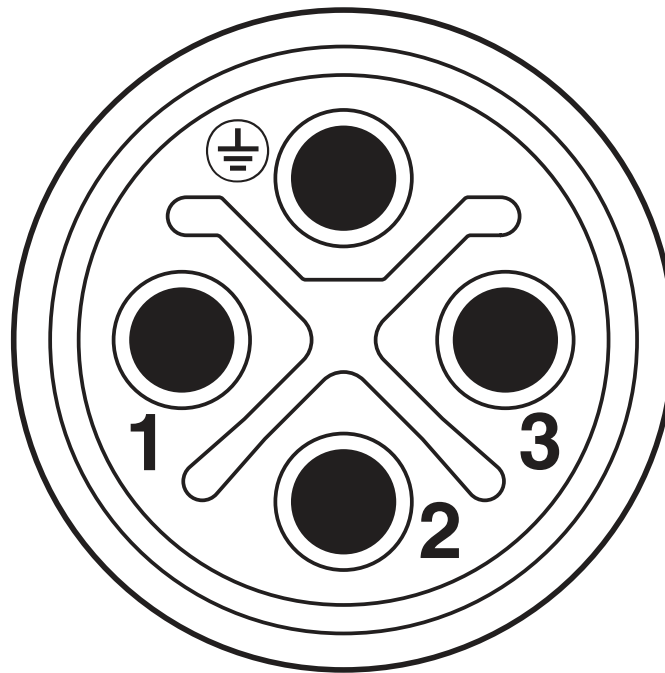

M12 plug pin assignment, 4-pos., S-coded, plug side view

Circuit diagram

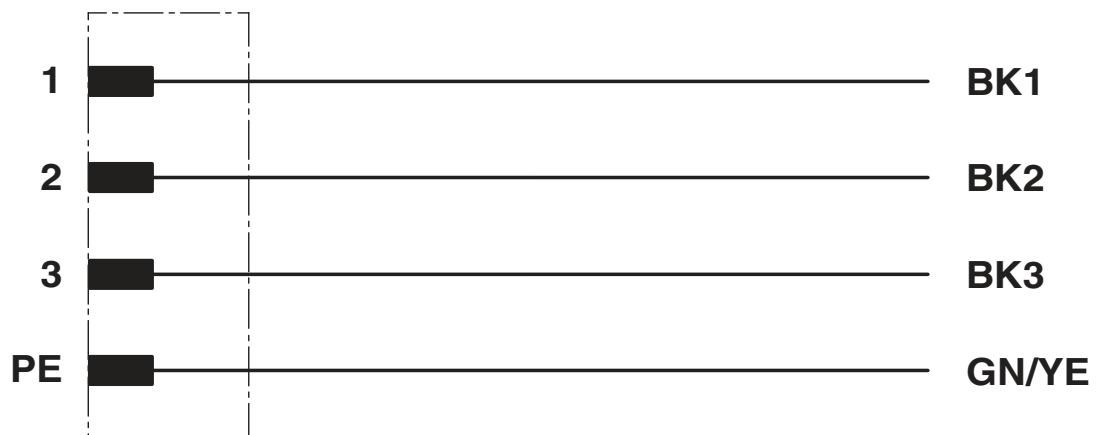


SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652


<https://www.phoenixcontact.com/us/products/1423652>

Dimensional drawing

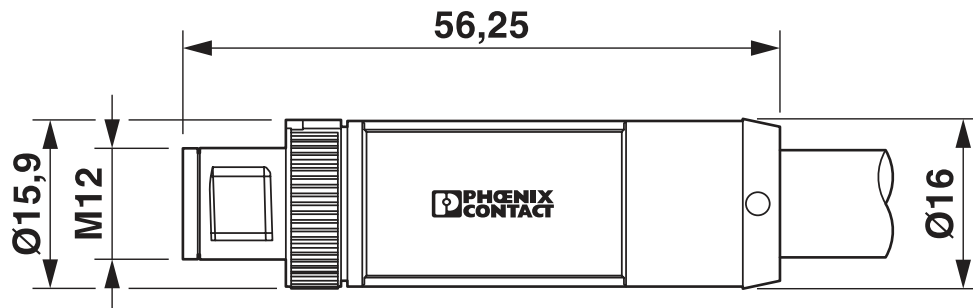


Plug, M12 x 1, straight, shielded

Dimensional drawing

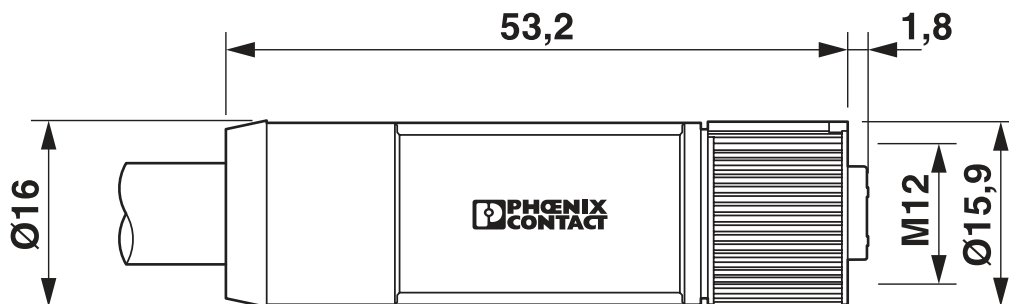

M12 x 1 socket, straight

Schematic diagram

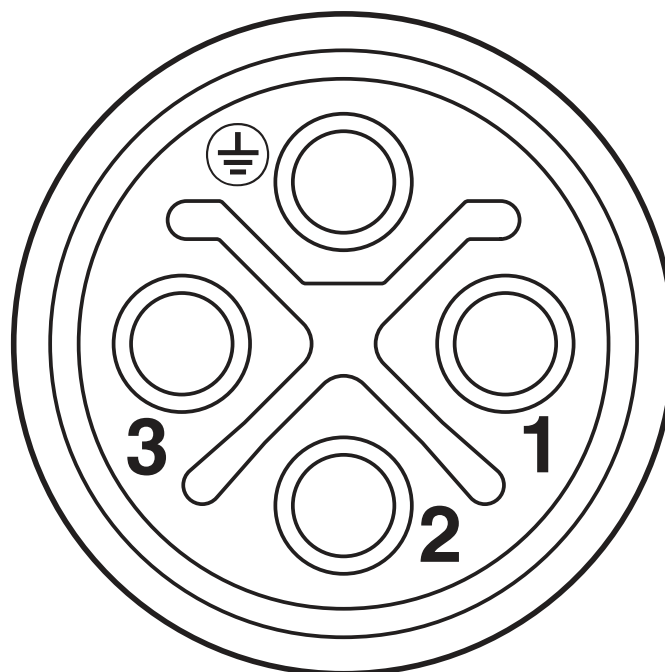

Pin assignment of M12 socket, 4-pos., S-coded, socket side view

SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable





1423652

<https://www.phoenixcontact.com/us/products/1423652>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1423652>

 UL Listed Approval ID: FILE E 468743				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	-	- 16

 cUL Listed Approval ID: FILE E 468743				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	- 16	-

cULus Listed				
---------------------	--	--	--	--

SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652

<https://www.phoenixcontact.com/us/products/1423652>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652

<https://www.phoenixcontact.com/us/products/1423652>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

SAC-4P-M12MSS/4,0-PUR/FSSPESH - Power cable



1423652

<https://www.phoenixcontact.com/us/products/1423652>

Accessories

PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/us/products/1560251>



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

SAC BIT M12-D16 - Tool

1200305

<https://www.phoenixcontact.com/us/products/1200305>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, knurl diameter: 16 mm, for 4 mm hexagonal drive

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com