



On-Delay Relay Output

SPECIFICATIONS

TIMING RANGES

Virtually unlimited. See page 77 for standard ranges available.

OUTPUT RATING DPDT, 10 A @ 250 VAC or 24 VDC, resistive; 211 VA @ 120 VAC, inductive, 25VA @ 24VAC inductive

TIMING Minimum Setting +0 – 20%

TOLERANCES Maximum Setting ±10%;

REPEATABILITY 1% maximum; no first cycle effect

RESET TIMES Before Time Out 100 mSEC
After Time Out 50 mSEC

RECYCLE TIME 40 mSEC

SUPPLY VOLTAGE 24 or 120 VAC or VDC, 50/60 Hz; ±10%
(TUC Series available in 120 Volts only)

FALSE TRANSFER No

REVERSE POLARITY PROTECTED Yes

POWER CONSUMPTION 3 watts (approximately)

DUTY CYCLE Continuous


TEMPERATURE RATING Operate 32° to 131°F (0° to +55°C)
Storage -49° to 185°F (-45° to +85°C)

LIFE EXPECTANCY Mechanical 10 million operations (minimum)
Electrical 100,000 operations @ rated load


WEIGHT 5 oz.

OPERATION

The time delay begins when power is applied to the input. Upon completion of the delay period, the relay energizes. Reset during or after the delay period is accomplished by removal of the input voltage. The TDC/TUC will not false transfer if voltage is removed prior to completion of the delay period. A fast recycle time permits accurate, high speed, continuous operation.

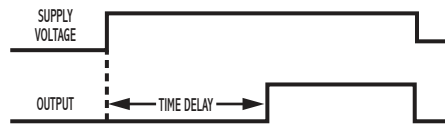


WIRING

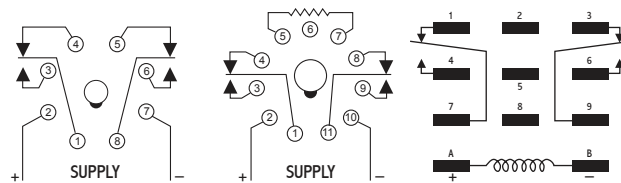

DPDT Octal Plug-in RB-08/PF083A
DPDT 11 Pin Plug-in External Resistor Adjustable RB-11/PF113A
DPDT Blade Plug-in 70-463-1

DIMENSIONS (INCHES)

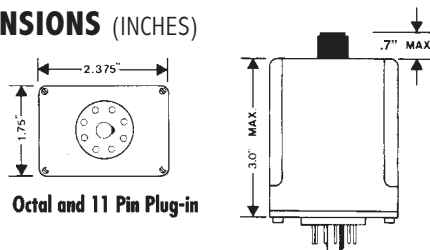

MODEL NUMBER

MODEL NUMBER	T		C		A		
SERIES							
Relay Output		D					
Relay Output with CSA		U*					
SUPPLY VOLTAGE	24 VAC or DC		24				
	110/120 VAC or DC		120				
TYPE OF OPERATION	Knob Adjustable				K		
	Lock Nut Adjustable				L		
	Fixed				F		
	External Resistor Adjustable				R**		
ENCLOSURE STYLE	8 or 11-pin Round Plug-in					A	
	Blade Plug-in					B	
	Non-UL 12-pin DIP Plug-in					C	

DELAY PERIOD

See page 77 for standard ranges available

Example: TUC-120-AKA-900—Interval on operate, 120 Volts AC or DC, knob adjustable from 9 to 900 seconds, 8-pin octal plug-in, UL recognized and CSA approved.

Notes:* The TUC series is offered in 120 Volts, style A enclosure only with optional types of operation “K”, “L”, or “F” CSA certified, File #LR40123**

TDC models using the “R” option are not UL Recognized. The “R” option is not offered in the TUC series or the style B enclosure. TDC models using “F”, “K”, or “L” options and in the 8-pin octal plug are only available in 24-volts.