


REVISION A


DO NOT SCALE FROM THIS PRINT

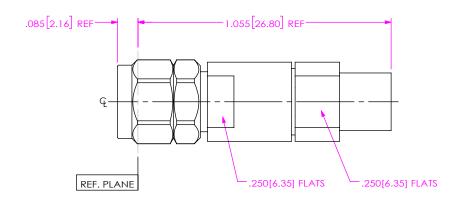

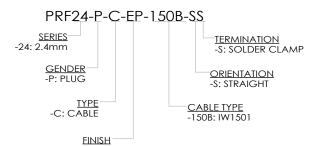

-EP: 50μ" EXTRA HEAVY GOLD
CENTER CONTACT, PASSIVATED **OUTER CONTACT**



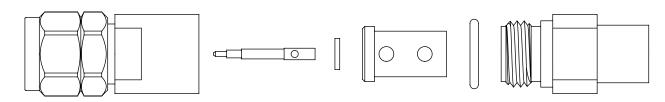

EXPLODED VIEW NOT TO SCALE (FOR CLARITY ONLY)

NOTES:

1. MATERIAL:

BODY, COUPLING NUT & CLAMP NUT: STAINLESS STEEL. PIN & LOCK RING: BERYLLIUM COPPER. SOLDER FERRULE: BRASS. GASKET & O-RING: SILICONE RUBBER.

BEAD: ULTEM 1000.

2. FINISH:

BODY, COUPLING NUT & CLAMP NUT: PASSIVATED. PIN & SOLDER FERRULE: GOLD OVER NICKEL PLATE,

50 µIN MIN GOLD OVER 50 µIN MIN NICKEL.

3. PCI P/N: 3240.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS **ANGLES**

.XX: ±.01[0.3] .XXX: ±.005[0.13] .XXXX: ±.0005[0.013]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART. TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING



520 PARK EAST BLVD, NEW ALBANY, IN 47150 code 55322


DESCRIPTION: 2.4MM PLUG, SOLDER CLAMP FOR IW1501 CABLE

PRF24-P-C-EP-150B-SS

08/08/2020 SHEET 1 OF 2 BY: HENSON T

1. TRIM CABLE AS SHOWN.


IN-PROCESS 1

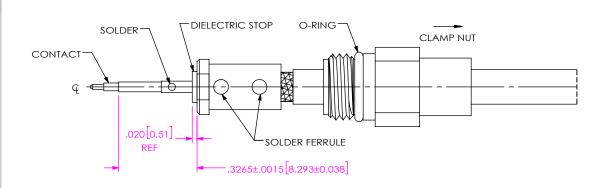

- 2A. INSTALL O-RING ONTO CLAMP NUT WHERE SHOWN AND SLIDE CLAMP NUT OVER CABLE IN ORIENTATION SHOWN.
- 2B. INSERT CABLE INTO SOLDER FERRULE UNTIL DIELECTRIC & FOIL ARE FLUSH WITH SOLDER FERRULE FACE AND SOLDER CABLE BRAIDS WHERE SHOWN.
- 2C. SLIDE DIELECTRIC STOP OVER CABLE CENTER CONDUCTOR AND SOLDER CONTACT FLUSH TO STOP TO DIMENSION SHOWN.

IN-PROCESS 2

IN-PROCESS 3

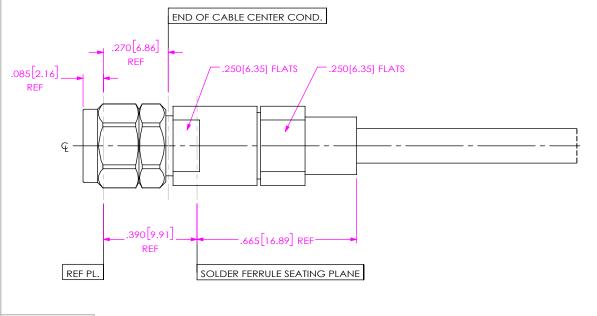

3. INSERT CABLE/CONTACT SUB-ASSEMBLY INTO CONNECTOR UNTIL SEATED AND TIGHTEN CLAMP NUT TO 25-35 IN-LBS.



c:\enterprisevault\DWG\MISC\MKTG\PRF24-P-C-EP-150B-SS-MKT.SLDDRW

PRF24-P-C-EP-150B-SS

BY: HENSON T 08/08/2020 SHEET 2 OF 2