# **IPC-6025**

#### 5-Slot Desktop/Wallmount Chassis with **Scalability as 5U Quad-System Solution**



#### **Features**

- Front handle for easy withdraw in rackmount carrier
- Lockable front door prevents unauthorized access
- Shockproof drive bay for two 3.5" HDDs
- LED indicators for system fault detection
- Optional rackmount carrier for quad-system solution
- Built-in Intelligent System Module enabling whole system fan control and remote manageability


### C € FCC


## **Specifications**

Daine Dani		External	Internal			
Drive Bay	3.5"	1	1			
Cooling	Fan	1 (9 cm / 46.6 CFM)				
Cooling	Air Filters	Yes				
Front I/O Interface	USB 2.0	2				
	LED Indicators	Power, fan, temperature, HDD				
Miscellaneous	Control	Power switch and system reset buttons				
	Rear Panel	Reserved Two 9-pin D-Sub openings				
	CPU/System fan speed, CPU/System temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep. for detailed information.)					
	(Only selected Advantech N		ully enable these functions, check with Advantech local rep. for			
	(Only selected Advantech N		ully enable these functions, check with Advantech local rep. for  Non-operating			
	(Only selected Advantech N	/IBs/CPU cards with WISE-PaaS/RMM installed can for				
Remote Monitoring	(Only selected Advantech N detailed information.)	/IBs/CPU cards with WISE-PaaS/RMM installed can formal operating	Non-operating			
Remote Monitoring	(Only selected Advantech N detailed information.)  Temperature	/IBs/CPU cards with WISE-PaaS/RMM installed can for Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-operating -20 ~ 60 °C (-4 ~ 140 °F)			
Intelligent System Module Remote Monitoring  Environment	(Only selected Advantech N detailed information.)  Temperature Humidity	ABs/CPU cards with WISE-PaaS/RMM installed can for the control of the card of	Non-operating -20 ~ 60 °C (-4 ~ 140 °F) 10 ~ 95% @ 40 °C, non-condensing			
Remote Monitoring	(Only selected Advantech Metailed information.)  Temperature Humidity Vibration (5 ~ 500 Hz)	ABs/CPU cards with WISE-PaaS/RMM installed can from the operating 0 ~ 40 °C (32 ~ 104 °F) 10 ~ 85% @ 40 °C, non-condensing 1 Grms	Non-operating -20 ~ 60 °C (-4 ~ 140 °F) 10 ~ 95% @ 40 °C, non-condensing			

#### **Front View**








**Rear View** 



4 IPC-6025 combined as a 5U quad-system rackmount IPC

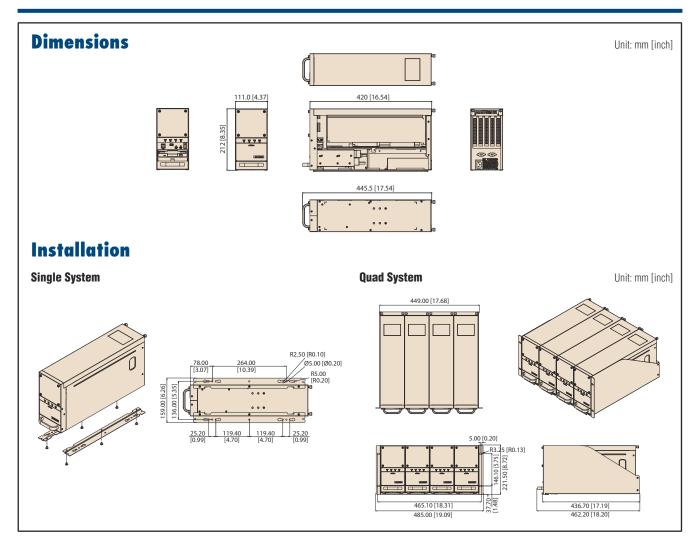

# **Ordering Information**

Part number	Power Supply	80 Plus Grade	Wattage	Type	Input	Switch type
IPC-6025BP-27ZE	96PS-A270WFX	White	270W	Single	AC 100 ~ 240V (Full Range )	AT Switch
IPC-6025BP-40ZE	96PS-A400WFX-2	Gold	400W	Single	AC 100 ~ 240V (Full Range)	AT Switch

## **Optional Accessories**

Ordering P/N	Description		
9892602501E	Rackmount carrier for Quad System solution		
IPC-DT-3120E	Mobile rack for dual 2.5" SATA HDDs		

# **Backplane Options**

Model	PICMG 1.3/1.0	PCIe	PCI-X	PCI	ISA	PCI/ISA
PCE-5000 Series						
PCE-5B04-20B1E	PICMG 1.3	1 (PCle x 16)	2	-	-	-
PCE-5B05-02A1E	PICMG 1.3	1 (PCle x 16) 1 (PCle x 4)	-	2	-	-
PCE-5B05-03A1E	PICMG 1.3	1 (PCle x 16)	-	3	-	-
PICMG 1.0						
PCA-6105P3-5A1F	PICMG 1.0	_	_	2	1	1