


Product Type	Current Transformer
AMGIS Part Number	/ ㄹ ㄷ ㄹ ㄷ
Customer Part Number	
Place of Manufacture	

SCHEMATIC:

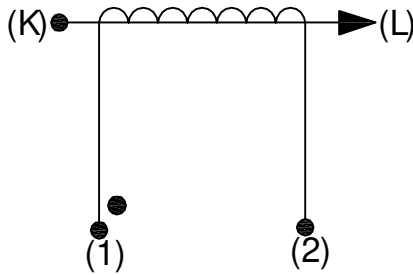

ELECTRICAL SPECIFICATION:


Rated input current	= 75Amps
Primary to Secondary isolation	= 2500VAC
Operating Frequency	= 50 / 60 Hz
Turns Ratio	= 1 : 1000
DC Resistance	= 24.00 Ω
Output Voltage	= 7.5V @ 75A / 100Ω, 0.5700W
Io @ Vrms : 9.26V	= 1520μArms
Ratio Correction factor (RCF*)	= 1.001@10% (Multiply current reading by this factor to compensate for transformer losses)

Volt/ Amp at rated Ip for different loads			
100Ω	500Ω	2000Ω	5000Ω
0.10	0.39	0.57	0.65


MECHANICAL SPECIFICATION :

OUTPUT RESPONSE vs INPUT CURRENT @ RATED BURDEN :


Pin Side View



Front View

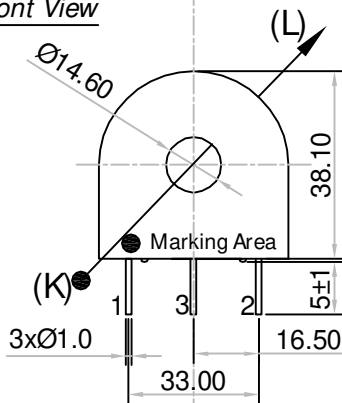


All dimensions are in mm  
Linear dimensional tolerance ±0.2mm

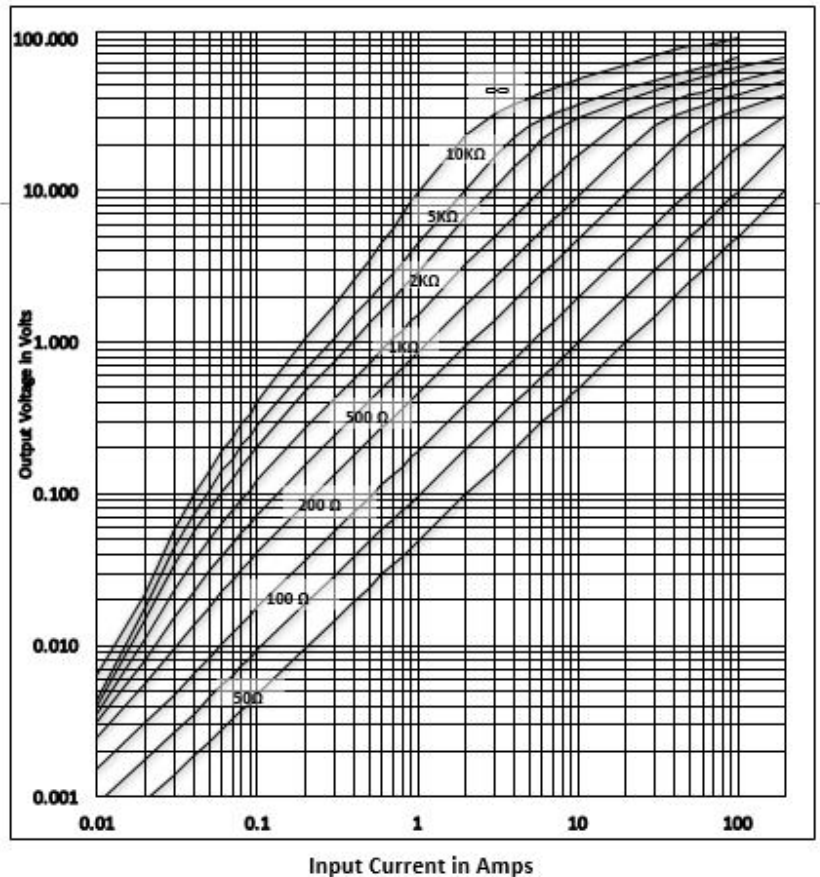


Note : Un-Used pin → #3

TYPICAL EXCITATION CURVE:

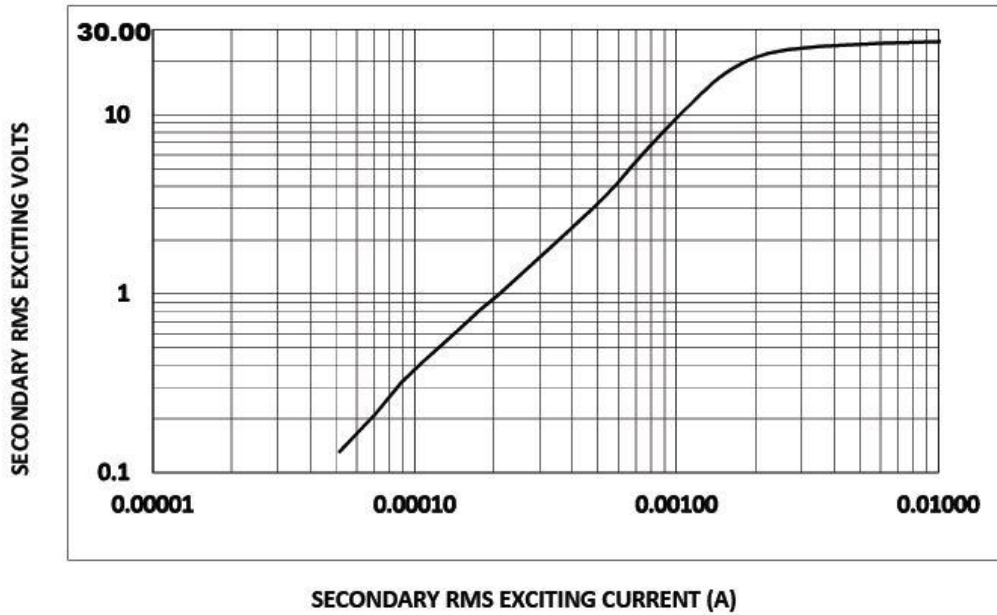

RATIO ERROR (%) vs RATED BURDEN @ INPUT CURRENT:

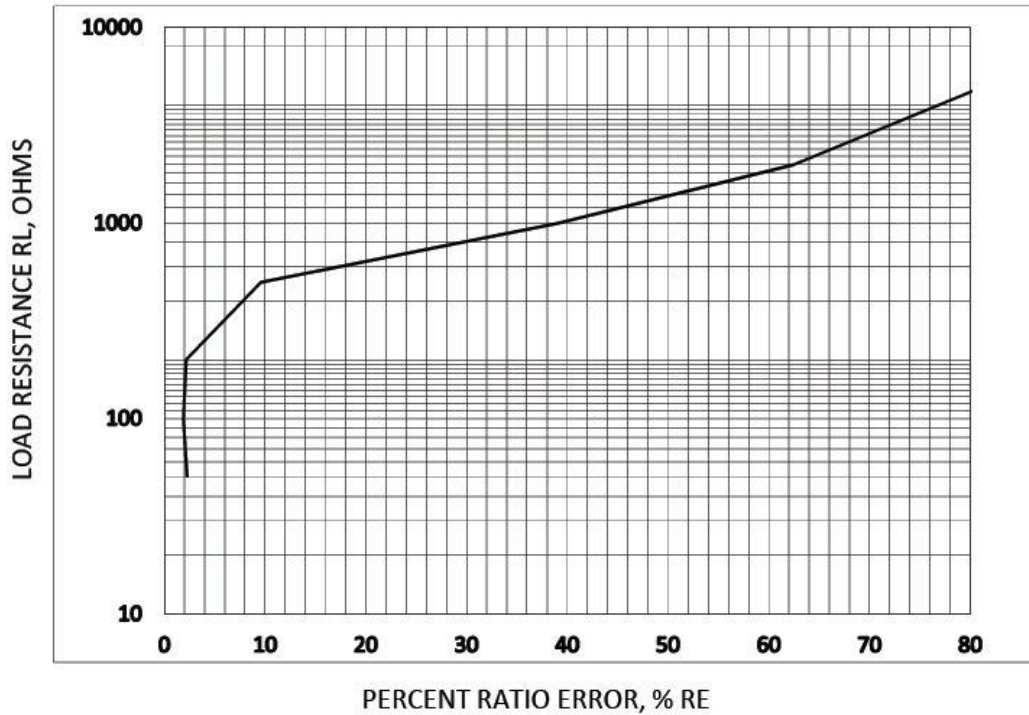

TRAF0 WEIGHT:

Approx. Weight = 0.0652 kg / pc

MARKING INFORMATION:

L01-6219  
 Ac yr / wk code  
 ●  
 Dot mark for Start pin identification

-----Initial Issue-----	1	0	Balaji. R	18-Nov'2015
Changes	Issue	Rev	Initial	Date