


TABLE 1	
MODEL NUMBER	LENGTH
415-0524-MM200	200mm ±6
415-0524-MM250	250mm ±6

REV	ECO	DATE
1	INITIAL RELEASE	6/24/2021

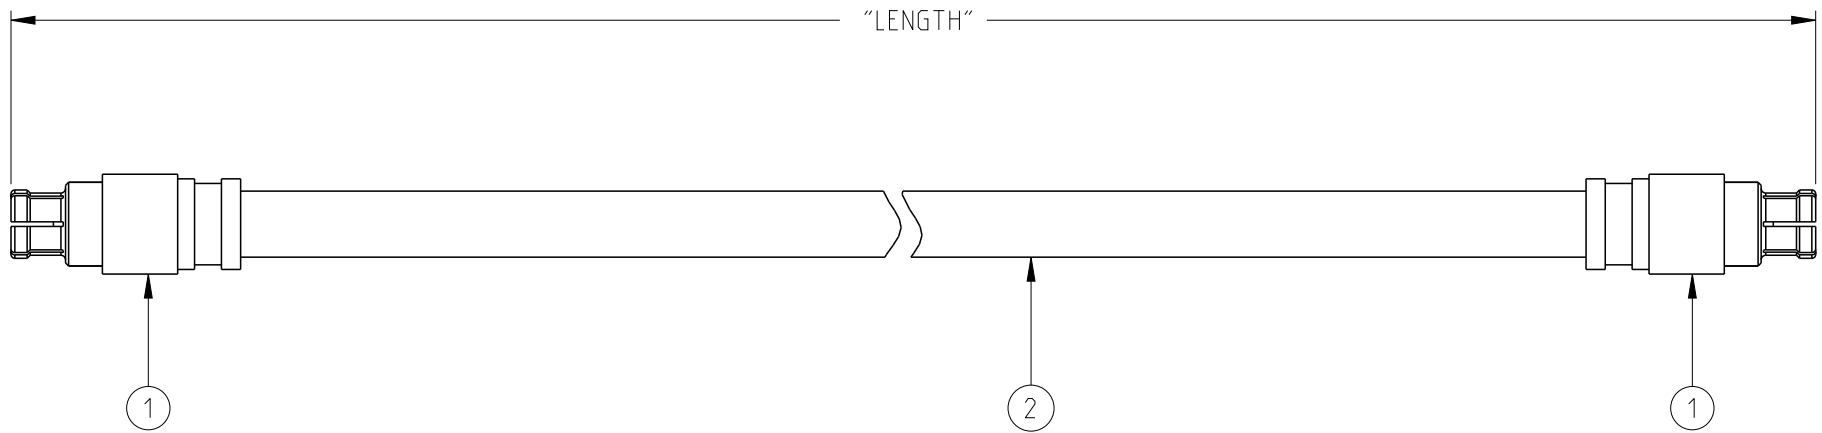

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. VSWR: 1.50 MAX DC-18GHZ

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	SMPM STR FEMALE
2	AR	CABLE

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No: 415-0524-MXXXX	JOHNSON		
	RoHS <input checked="" type="checkbox"/> COMPLIANT	Cage Code	Title: CABLE ASSY. METRIC, SMPM STR FEMALE TO SMPM STR FEMALE, .086" SEMI-RIGID	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION	Drawing No.	REV.
	.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	Drawn by: ROMAN YAO Date: 6/24/2021	415-0524-MXXXX	1
	Size A	DO NOT SCALE DRAWING	Workmanship Std/Sheet NONE 1 OF 1	